



AMBICA

STRONG SINCE 1970


BUILDING TOMORROW WITH STEEL

THE LEADING INTEGRATED STAINLESS STEEL PRODUCER




AMBICA

STRONG SINCE 1970

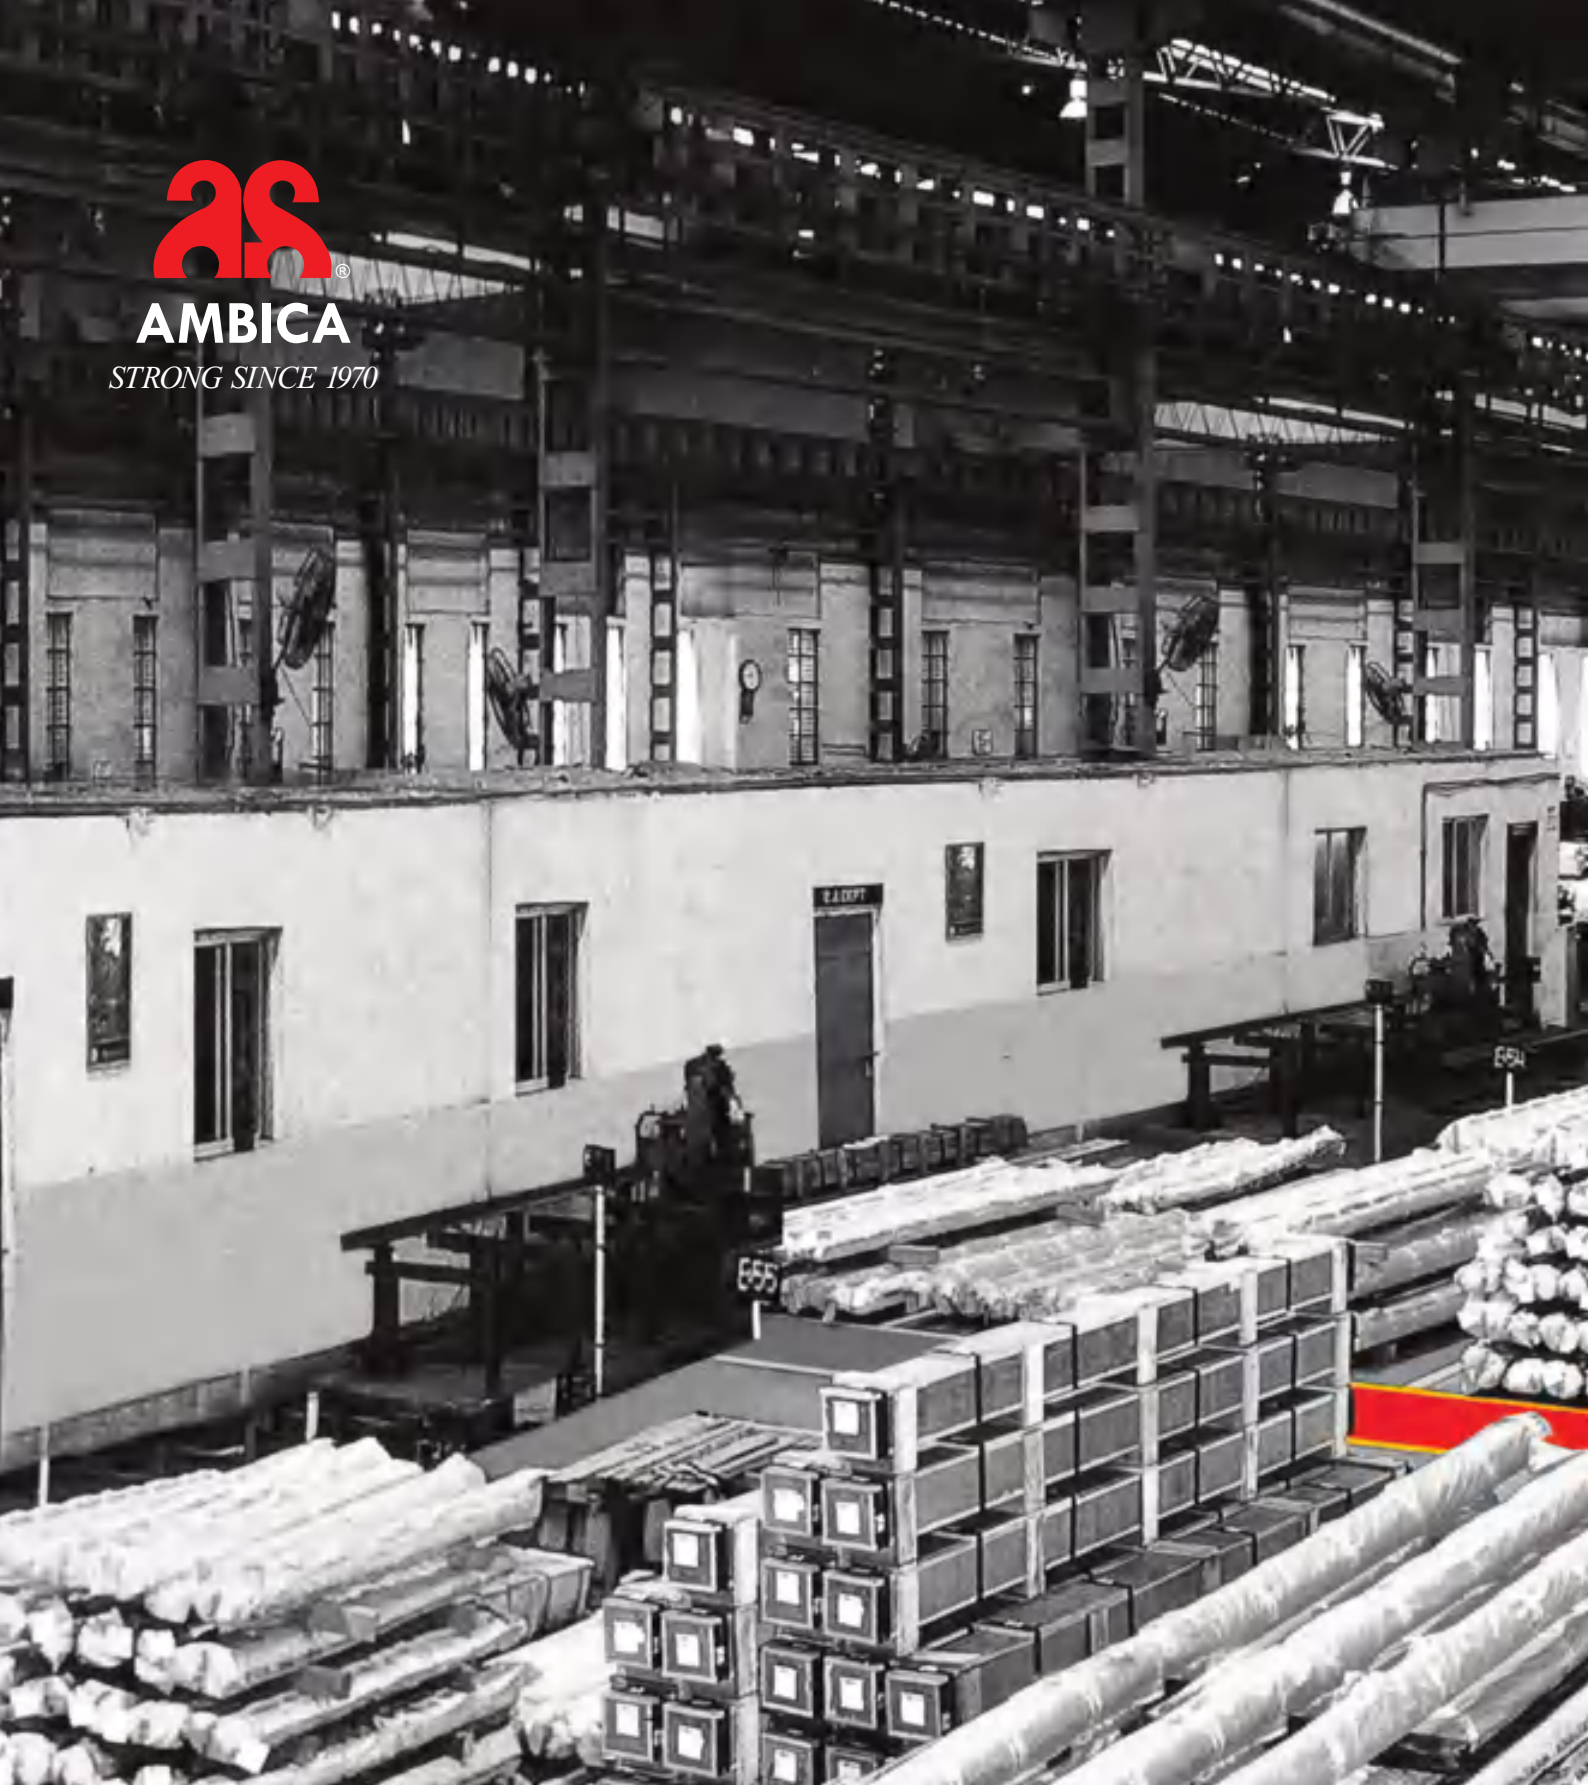

5 decades of steel making

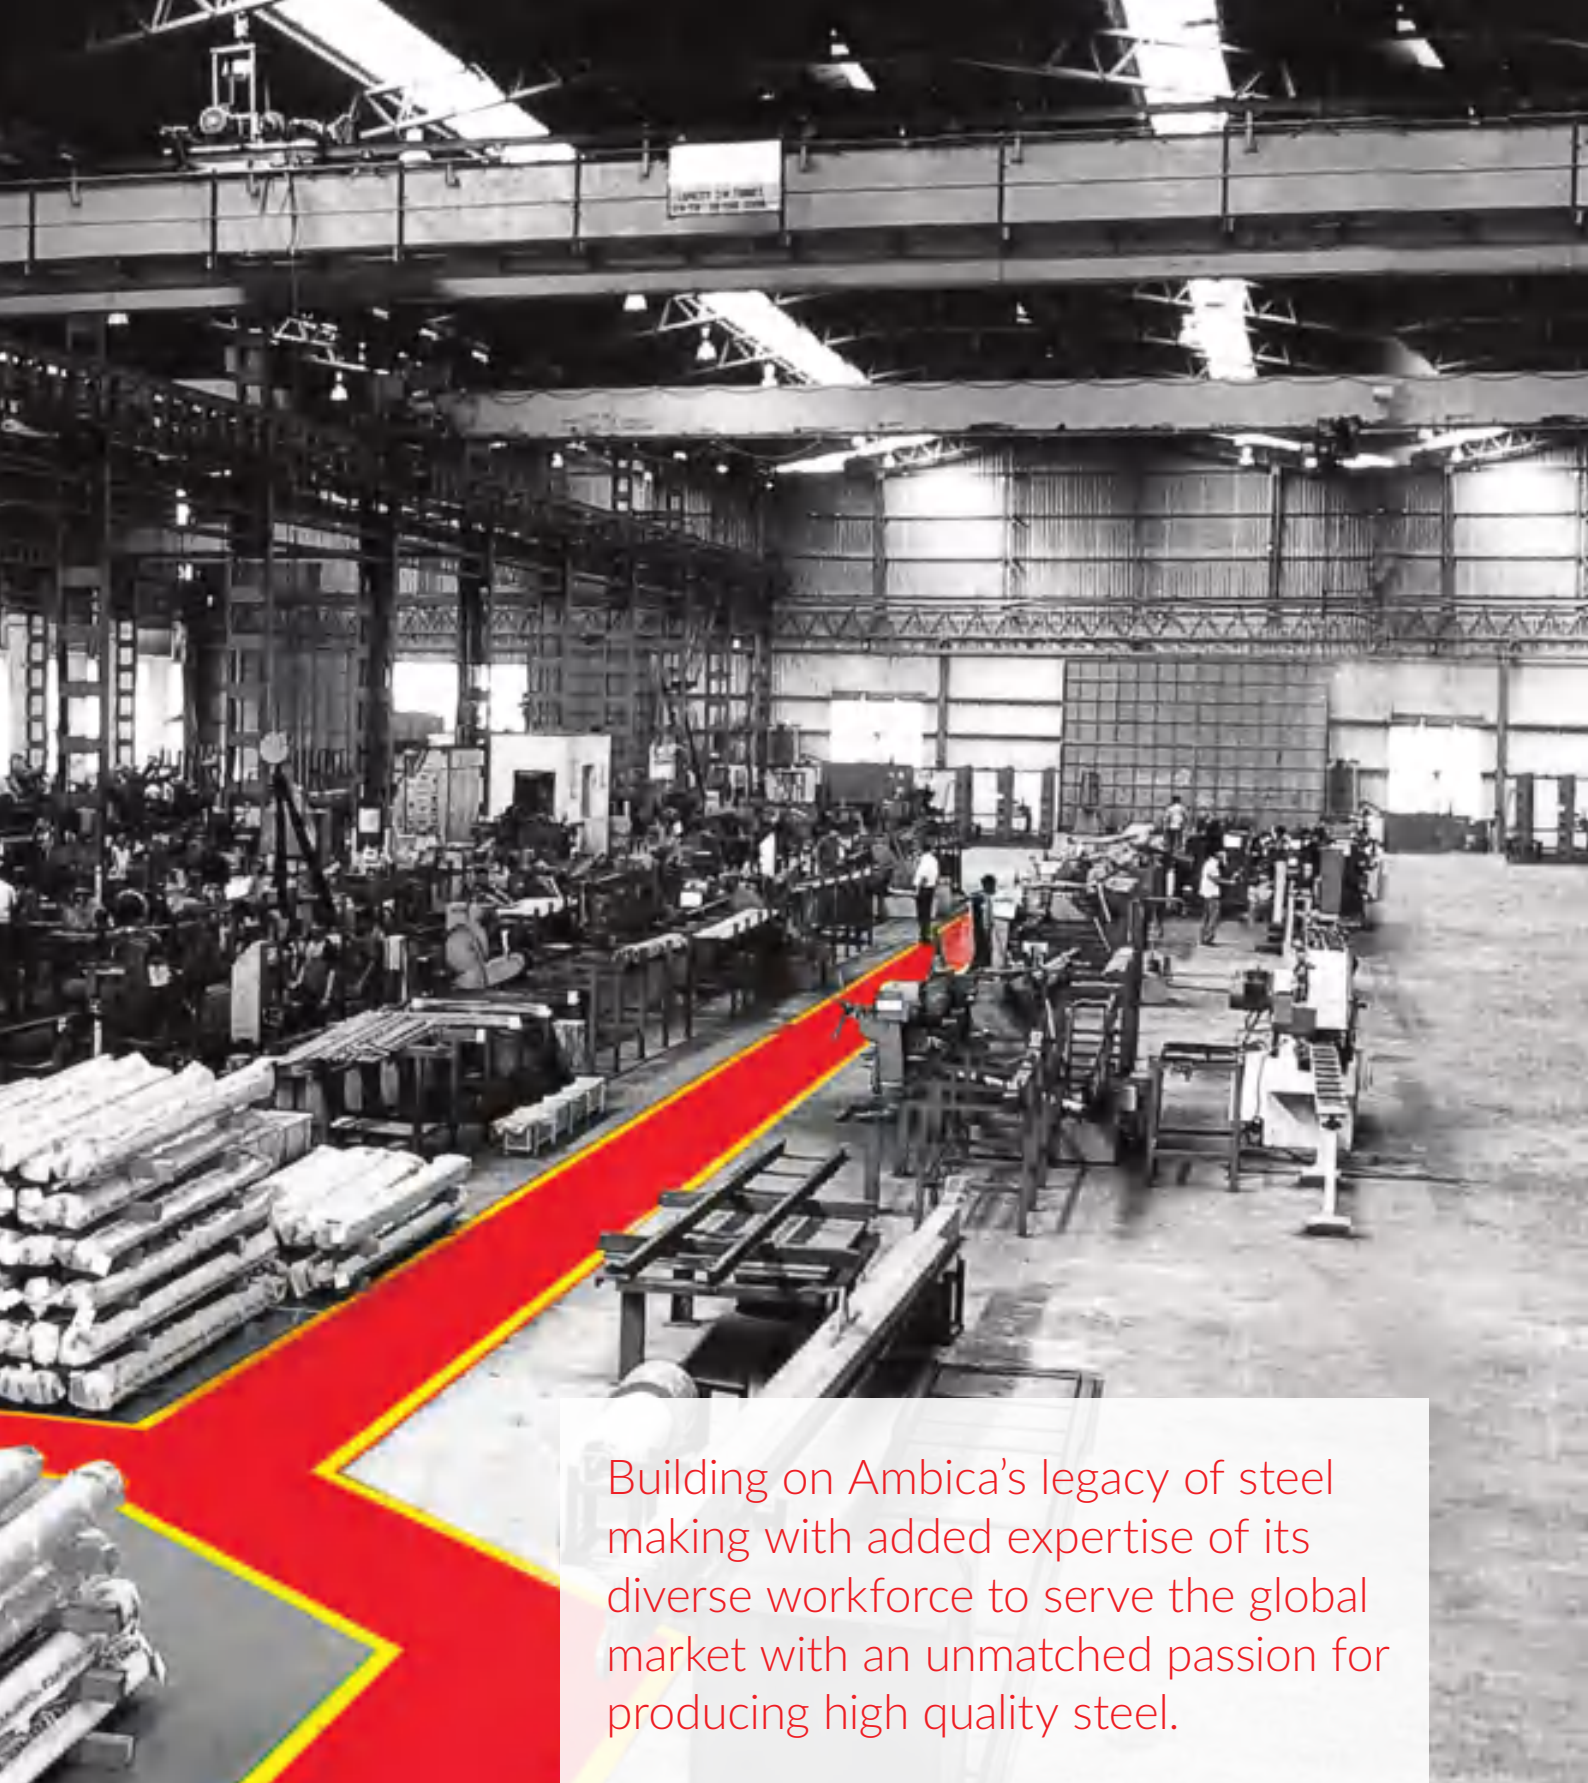

Building on Ambica's legacy of steel making with added expertise of its diverse workforce to serve the global market with an unmatched passion for producing high quality steel.

Fully Integrated plant is equipped with :

- Melting & Casting Shop
- Hot Rolling Mills
- Heat Treatments
- Cold Finishing



AMBICA

STRONG SINCE 1970



Pursuing world-leading technologies and manufacturing capabilities, and providing excellent products and services.

80,000+
tonnes annual
melting capacity



Ambica is one of the most updated stainless steel mill in the world, employing a wide range of ultra-modern steel making technology. Melting data is monitored precisely through a strong production control system that ensures tight adherence to specified material properties such as purity levels, Chemical and Mechanical values.

Our team of specialists concentrates on the research and development activities to maintain our position of being the best in the industry.

1.31+
million metric
tonnes produced

151+
number of grades
produced

70
countries
served

Ambica serves over 2,100 customers in more than 70 countries



Testimonials

This is to certify that we have been procuring Stainless Steel 316/316L raw material from M/s Ambica Steels Limited, Ghaziabad from last 3 years.

The quality of the product supplied by M/s Ambica Steels Limited is up to the mark and as per our requirements. Mill Test Certificates accompany with all their suppliers.

Pre sales and Post sales support has been excellent.

Deliveries have been excellent.

Panam Engineers Limited
Khyati Trivedi

We are thankful to Ambica steels limited in helping us in reducing our procurement lead time for Bright bars in best possible manner. Kudos, to their highly professional.

Operation team and we highly recommend Ambica for their best in class product & services in Steel Industry.

Victoria Auto Pvt. Ltd.
Gaurav Mann,
Purchase Manager

We are working with Ambica Steels since many years and experienced during that time a valuable partnership. We respect the quality of the material and the way Ambica is developing new products.

Jacquet Metal Services
Germany

Our company has been working with Ambica Steels Limited for the past 1.5 years as our most important supplier for stainless steel bars. It all started with the way they helped us in the time of need and it developed into healthy working relationship over time.

Our experience has been excellent with them as they not only provide good quality products but also provide excellent service without failure.

Venus Industrial Corporation
Rahul Gupta, COO

ASIA

966 CUSTOMERS SERVED

19 COUNTRIES SERVED

Australia
Sydney

OCEANIA

55 CUSTOMERS SERVED

2 COUNTRIES SERVED

Certificates & Approvals

Approved
Manufacturer
for Steel Making
Year 2015

Lloyd's Register,
London, U.K.

AS 9100 D
(EN 9100:2009
and JISQ 9100)
Year 2010

RW TÜV Systems
GmbH, Germany

ISO
9001:2015
Year 2002

RW TÜV Systems
GmbH, Germany

ISO
45001:2018
Year 2021

TÜV NORD CERT
GmbH, Germany

RoHS-Directive
2011/65/EC
Year 2018

RW TÜV Systems
GmbH, Germany

Boiler Quality
Steel Certification
Year 2006

Central Boilers Board,
India

CE/CPR
(305/2011)
Year 2016

TÜV NORD CERT
GmbH, Germany

NORSOK
M-650
Year 2016

DNV GL Business
Assurance India
Pvt. Ltd., Chennai

Pressure Equipment
Directive 2014/68/EU)
Year 2003

RW TÜV Systems
GmbH, Germany

AD 2000
Merkblatt W0
Year 2002

RW TÜV Systems
GmbH, Germany

REACH Regulation
(EC1907/2006)
Year 2013

RW TÜV Systems
GmbH, Germany

IATF
16949:2016

TÜV NORD CERT
GmbH, Germany

Vd TUV 418

TÜV NORD CERT
GmbH, Germany

ISO
14001:2004
Year 2003

TÜV NORD CERT
GmbH, Germany

IS 6603:2001

Bureau of Indian
Standards



Quality Assurance

At the core of the functioning of Ambica Steels, lies a strong commitment towards quality. Ambica has been progressively innovative since the beginning and its products have stood test of the time. The organization has a legacy of delivering quality products at desired prices and that too within a defined time frame.

For guaranteeing quality at every step, we ensure that

- Perfectly documented work-procedures endorsed by the 3rd party accreditations, certifications and approvals
- In-house testing laboratories installed with ultra-modern equipment

At Ambica, we always study and evaluate our safety systems, and aim to become better than the industry's best.

Non-Destructive Testing Facilities

In order to meet the most demanding product specification, Ambica has installed an ultra-modern fully Automatic Ultrasonic Testing line as well as Magnetic Particle Inspection (MPI) machine. These machines have enhanced our capabilities to detect any internal and/or external (surface and sub-surface) defects to a very greater extent, allowing us to keep our quality promise to our customers.

Radioactivity Contamination

Ambica has always been well aware of its responsibility of delivering the radiation-free products to its customers, and to endorse this principle the management had bought 2 radiation dosimeters almost eight years ago (Environmental Radiation Dosimeter is the instrument that is used to check the presence of radioactive contamination like photons & Gamma Radiation in steel scraps). Today, the company is also using RAD detectors with external sensors. These instruments can measure faster, and can measure much lower contamination levels with a higher degree of accuracy. This is in addition to Ambica's laboratory for the measurement of radiation through identification of nuclides (gamma spectroscopy with multi-channel analyzer). The quantification is shown in Bq/g and Bq/Kg. At Ambica, each delivery of scrap is tested for radioactive contamination, which ensures that of all its raw materials are free from radioactive contamination. This procedure is being followed for last 8 years.

Besides, our state-of-the-art radiation check equipment installed at our entry gates ensure that all incoming / outgoing materials are free from contamination and provides a radiation free atmosphere for our employees are work in.

Our Quality & Testing Facilities



Metallurgical Testing


Hand Held XRF machine for Sorting

Spectro for Testing Chemical Composition

Radioactivity

LECO Gas Analyzer


Microscope for checking Granular Structure

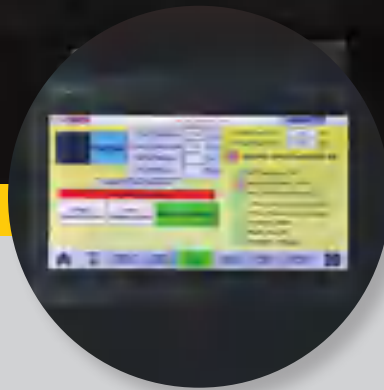

Non-Destructive Testing

Fully Automatic Ultrasonic Testing

MPI

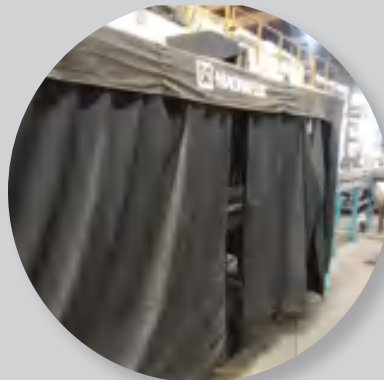

Mechanical Property Testing


Tensile Tests

Impact tests-Charpy

Hardness tests - Rockwell & Brinell

Surface Roughness


Awards & Accolades



India's Most Admired Brand
in Iron & Steel Category
Year - 2018-19



ACMA - Certificate of
Membership
Year - 2018-19




Certificate of Participation
in Wire & Tube, Mumbai,
India Year - 2018




Award for outstanding
contribution towards the
promotion of Indo-German
economic relation
Year - 2018




Certificate for outstanding
contribution towards the
promotion of Indo-German
economic relation
Year - 2018




EEPC India - Award for
Export Excellence
Year - 2016-17



EEPC India - Star Performer
in Rolled, Drawn and Folded
Products of Iron & Steel
Large Enterprise
Year - 2015-16



EEPC India - Shield for Star
Performer in Rolled, Drawn
and Folded Products of Iron &
Steel Large Enterprise
Year - 2015-16



Bureau of International
Recycling Gold
Membership Certificate
Year - 2015



Government of India -
Star Export House
Recognition Certificate
Year - 2015



CII - Certificate of
Participation at 28th Quality
Circle Competition
Year - 2015




EEPC India - 44th National
Award for Export Excellence
Year - 2011-12



EEPC India - Award for
Export Excellence
Year 2007-08



Material Recycling Association
of India - Membership
Certificate

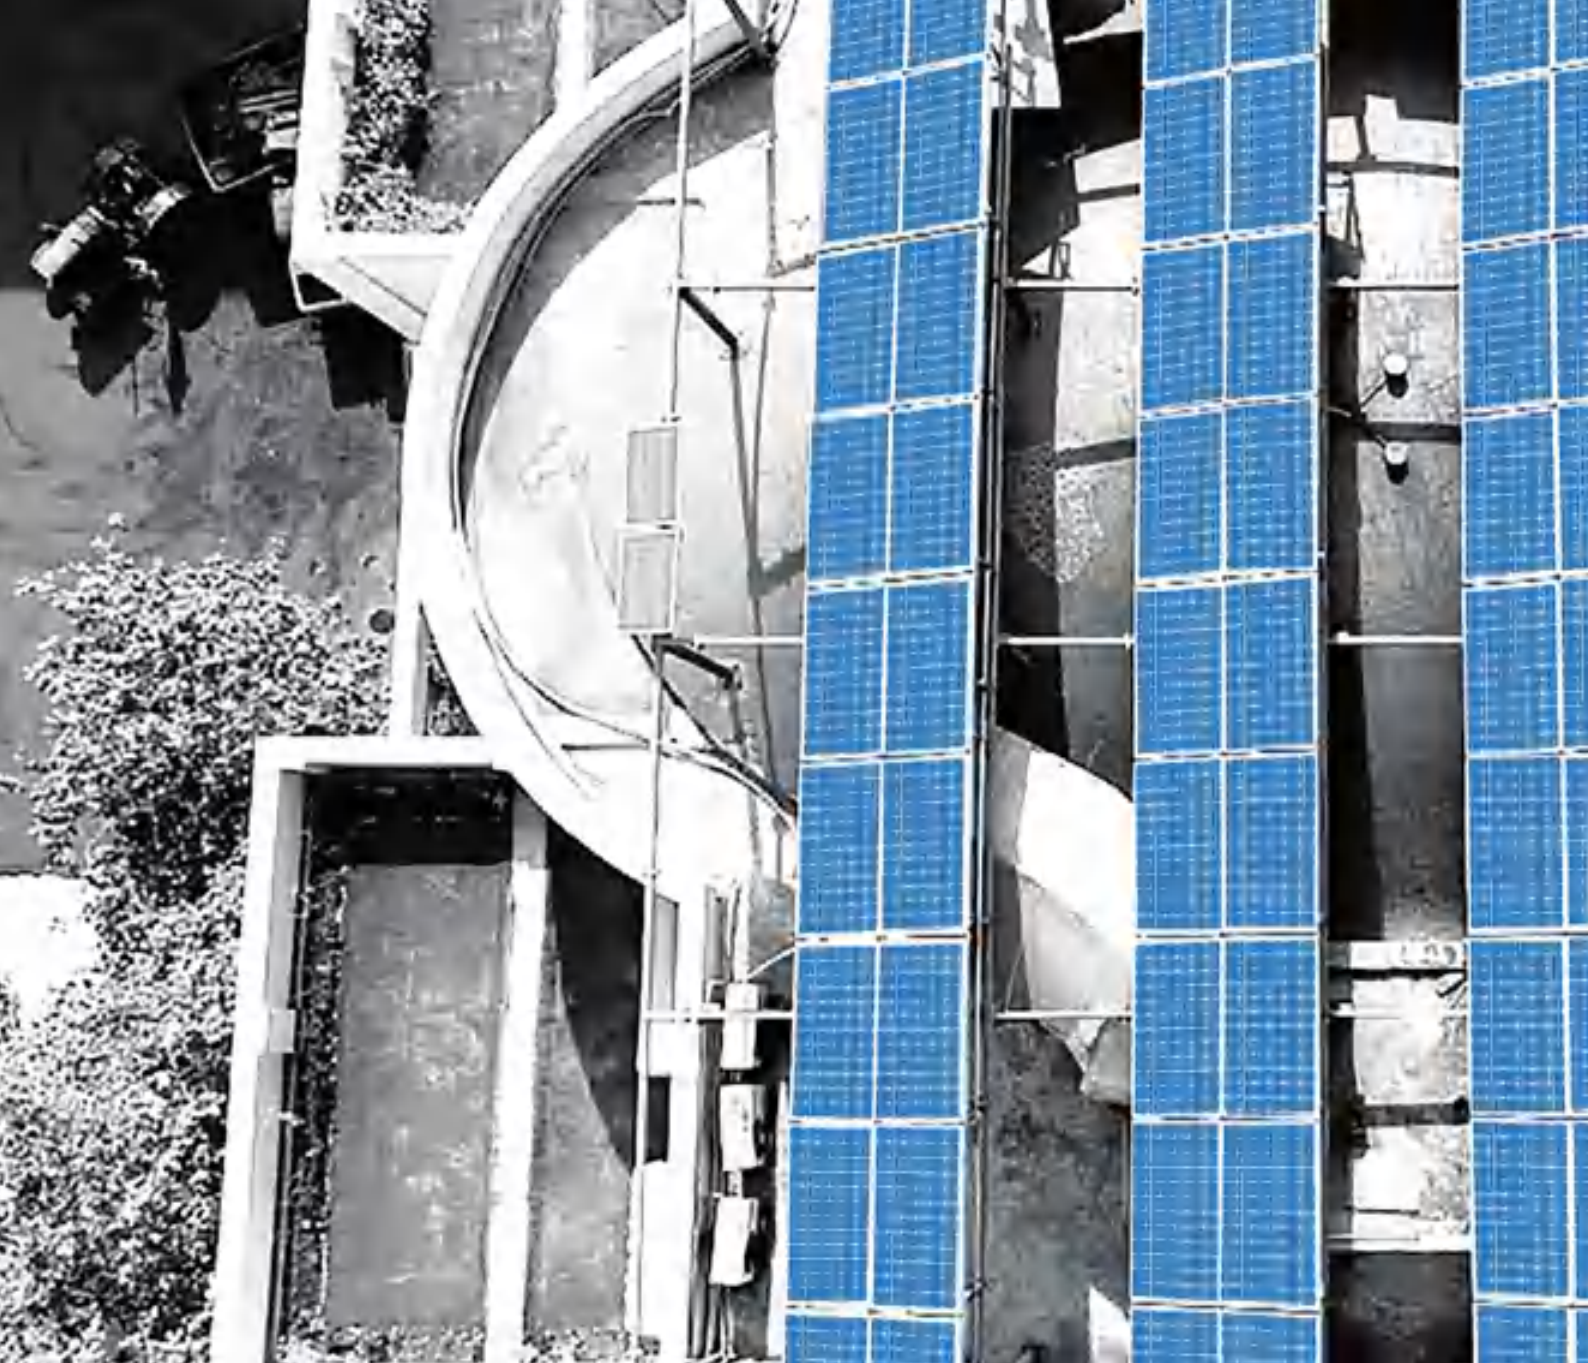

Committed to long-term Sustainable Growth

Ambica Steels is one of the first stainless steel long products mills in India to successfully implement the Environmental Management Systems (EMS) in line with the requirements of ISO 14001, in the year 2003.

Conforming to the best environmental standards, we conduct regular environmental impact assessments for Water, Air, Soil Quality and the local Ecosystem.



Water recycling practice followed in ASL

Stage 1:

Sewage treatment plant & ETP

- We have 30 KLD capacity STP at unit1 & 2, & having 10 KLD capacity STP at UNIT4.
- Thus we are saving around 25 KLD water daily in total for all of our units.
- Through STP we are saving 7,50,000 Ltr water monthly.
- We have ETP of 20 KLD capacity at Unit4 for recycling effluent water.

Stage 2:

Ultrafiltration System Plant & RO Plant:

- 10KL/hr. capacity
- With the help of this we are treating Municipal STP water & using the same in our furnace for the cooling purpose.
- Thus by utilization of the Municipal STP water we reduced more than the 50% ground water utilization in our application at Unit 1& 2.

Stage 3:

RO Plant:

- By increasing the capacity of the RO at unit 1- from 3KL/hr to 9KL/hr. We increase yield or vice versa, reduce waste by approx 15% at the final stage.
- By installing the second stage RO (3 KL/hr), with increased capacity of the first stage RO (8KL/Hr.) at unit 2, We increase yield or vice versa, reduce waste by approx 25%.


We operate responsibly to protect our environment



Every drop of water used in the manufacturing process is recycled and used for greening our offices.



By using an effective dust collection system, we keep the emission of gases and chemicals from the steelmaking processes to minimum.




A 100 KW roof top solar panel installation for Eco – friendly power generation.



Hot Finished Products



Hot Rolled
Bars



Forging
Quality Ingots
& Continuous
Cast Billets

22MT
Melt
Size

2
Rolling
Mills


6
Billet
Sizes

140
Sizes
Rolled

13
Ingots
Sizes

849
Employees

Manufacturing Process

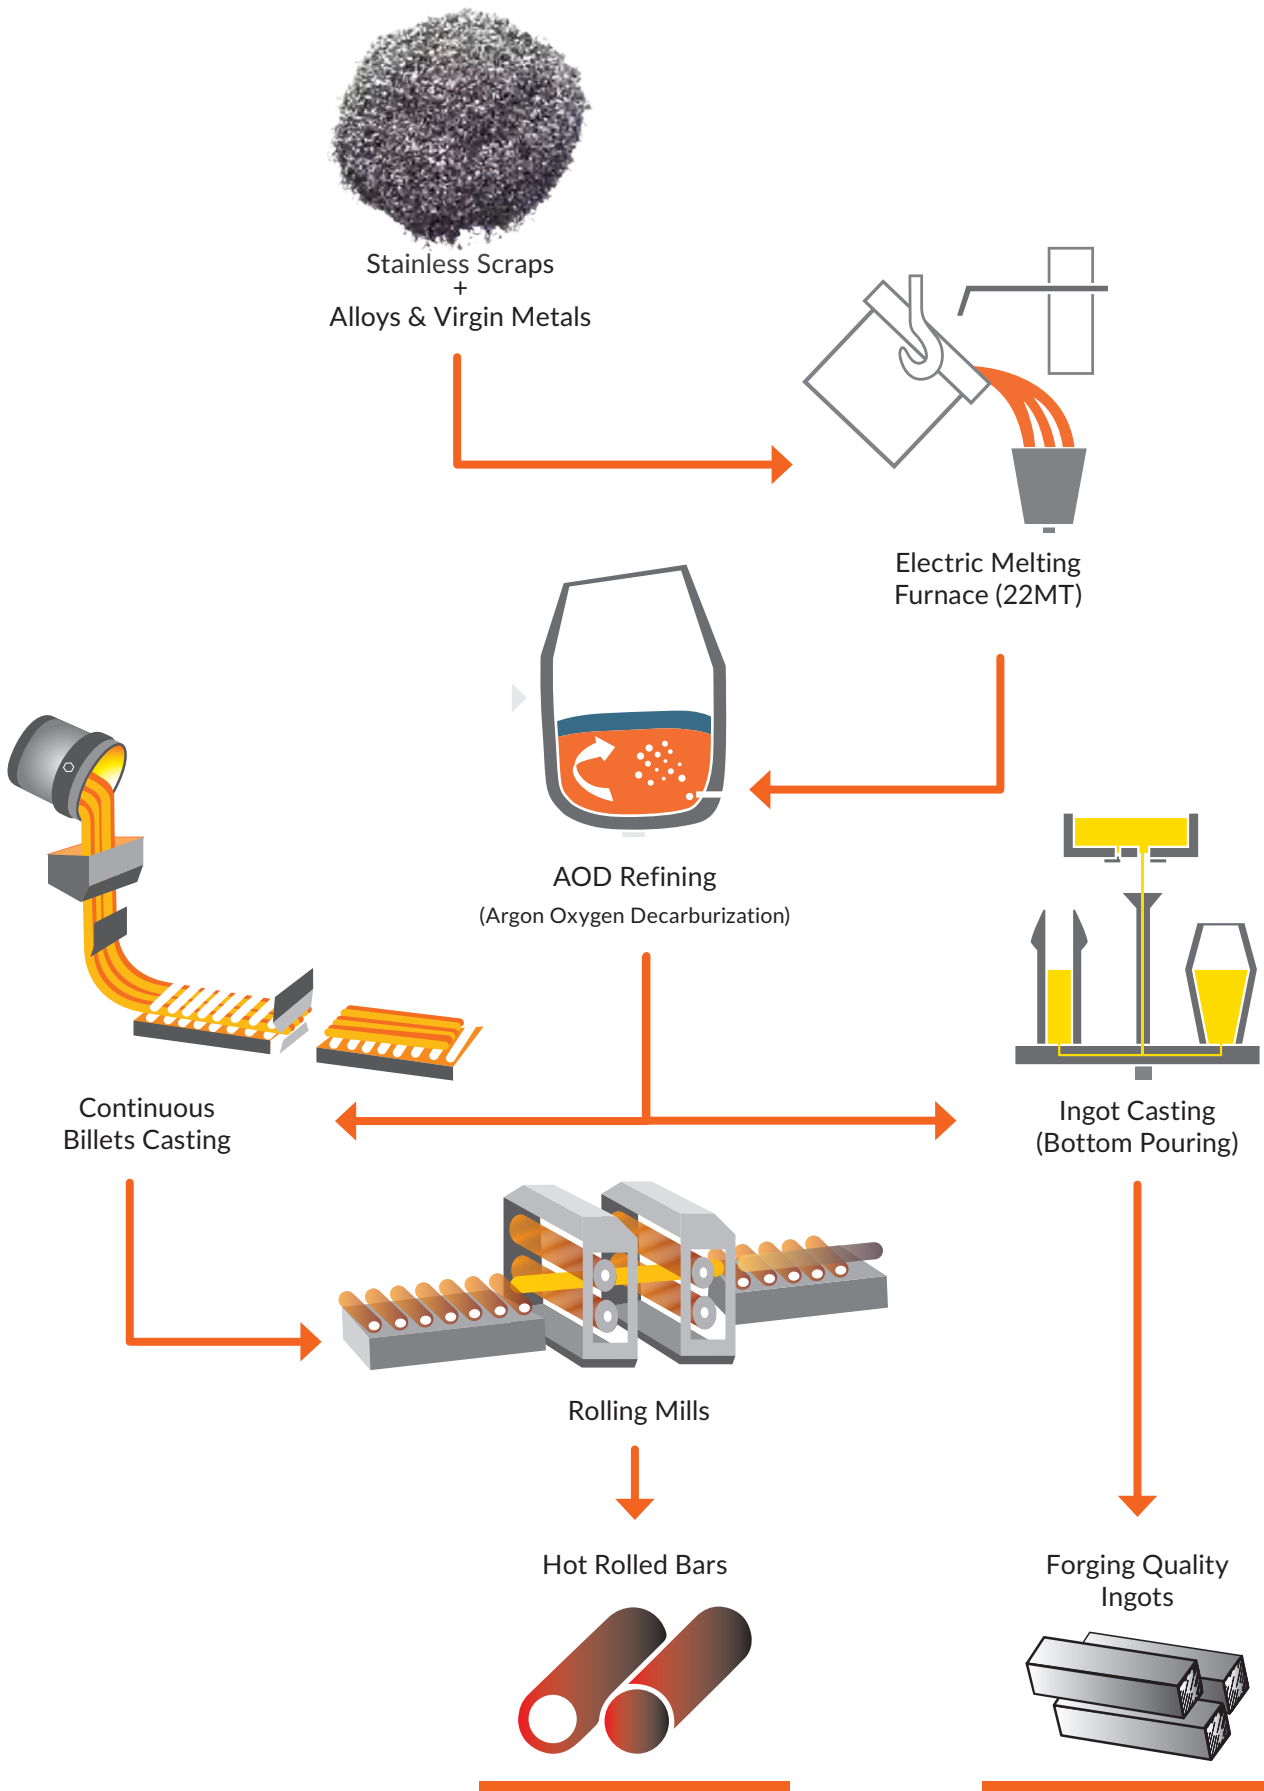

Hot Rolled Bars

Ambica offers Hot Rolled Bars are primarily consumed in forging industry And Due to their superior formability and machinability, Ambica's Hot rolled bars are used in various applications such as flanges, shafts, fittings and fasteners.

Hot Rolled bars sizes	16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 42, 45, 47, 50, 53, 54, 56, 58, 60, 63, 64, 65, 68, 70, 73, 75, 80, 83, 85, 90, 95, 100, 105, 110, 120, 125 mm.
RCS Sizes	50, 55, 60, 63, 70, 75, 80, 90, 100, 115.
Size tolerances	EN 10060 and ASTM A 484
Length	2 meters - 8 meters (8 to 26 feet)
Ultrasonic Test	100% tested through Digital Ultrasonic Flaw Detector, as per ASTM A-388, EN 10308 (class 1 to 4)
Crack Test	Magnetic particle Inspection (MPI)
Surface Finish	Hot Rolled (Black Surface) in spot ground condition. Free of surface defects/cracks
Heat Treatment	Annealed, Solution Annealed, Quenched & Tempered (QT), Double Ageing/Double Tempering





Forging Quality Ingots & Continuous Cast Billets

Ingot Size (in mm)	Ingot Size (in inch)	Ingot Weight (in KG)	Ingot Weight (in MT)	Ingot Weight (in lbs)	Ingot Shape
356x406x1854	14"x16"x73"	1950	1.95	1984	Square
406x508x1854	16'x20'x73'	2950	2.95	6504	Square
508x610x1854	20"x24"x73"	4000	4	8818	Square
813x965x1854	32"x38"x73"	10000	10	22046	Fluted
1067x1321x2490	42"x52"x98"	22000	22	48501	Fluted

Ambica's Billets / Blooms are a perfect solution for re-rolling, forging and ring rolling applications.

Sizes	100x100, 120x120, 140x140, 160x160, 200x200, 220x250 mm
	4x4", 4.75x4.75", 5.5x5.5", 6.25x6.25", 8x8", 8.5x10"
Length	2 metres - 8 metres (8 to 26 feet)
Straightness	8 mm/meter max
Surface Finish	As Cast Condition (Black Surface) in spot or fully ground condition



Duplex & Special Steels

Ambica is the largest producer of Duplex Stainless Steel Long Products in India. Ambica produces these materials for a wide variety of applications and industrial sectors. These user segments are the benchmark for quality. Every piece is continually and stringently checked for quality and certified.

Ambica's steels are melted, casted and formed with perfection and care. Due to its two-phase microstructure, Duplex steels are extremely tough to produce. It took Ambica many years of continuous trials and errors, before gaining a complete control over this grade. The dual phase structure demands a perfect balance in the chemistry of these steels. Duplex steels also show an irregular behavior when undergoing various hot working processes. But thanks to the strong determination of our Research and Development team, as Ambica now enjoys the reputation of being one of the most reliable supplier of Duplex materials in domestic as well as the international market.

APPLICATIONS

- > Bridges
- > Pressure vessels
- > Heat exchangers
- > Water heaters
- > Seawater systems
- > Flue-gas cleaning
- > Desalination plants
- > Pulp and paper industry
- > Cargo tanks and pipe systems in chemical tankers
- > Firewalls and blast walls on the offshore platforms
- > Components for structural design


Special grades
1.4122
1.4114
1.4418
430 FR

PREN -Pitting Resistance Equivalent Number	
SS Grade	PREN
316L / 1.4404	>24
2304 / 1.4362	>25
F-51 / 1.4462/S31803	>31
F-60/1.4462/S32205	>35
F-53/1.4410/S32750	>40

S.No	Products Offered
1	Bright Round Bars
2	Precision Round Bars
3	Hot Rolled Bars
4	Billets
5	Ingots



Heat no# S-5618
Grade# F51/1-4462
Insp. Seal
www.ambicasteels.com



[Faded text on label]





S.No	Heat Treatments Offered
1	Solution Annealing
2	H1025
3	H1075
4	H1150
5	H1150D
6	H1150M
7	H900
8	H925
9	P1070

S.No	Products Offered
1	Bright Round Bars
2	Precision Round Bars
3	Hot Rolled Bars
4	HRAP Flat Bars
5	HRAP Square Bars
6	Billets
7	Ingots

S.No	Specifications
1	AMS 5643R
2	DIN/EN 10088-3
3	ASTM A 564
4	AMS 5622
5	AMS 5640

Precipitation Hardening Steels

Ambica specializes into the production of 17-4 steels (also known as 1.4542 and AISI 630). This is a precipitation hardening martensitic stainless steel with Cu and Nb/Cb additions. The grade combines a very high strength, hardness and corrosion resistance.

Mechanical properties can be optimized with various heat treatments. Very high yield strength up to 1000-1100 MPa (145-160 ksi) can be achieved.

APPLICATIONS


- > Oil and Gas Industry
- > Pump and Valves in high pressure components
- > Chemical Process Equipments
- > Measuring and Control techniques
- > Food Industry
- > Aerospace (Aircraft and Rocket Engineering and Fittings)
- > Pulp and Paper Industry
- > Offshore (Foils, Helicopter Decks, Platform etc)
- > Mechanical Components
- > Power Generation
- > Nuclear Reactor Components

Ambica's 17-4 PH material offers following benefits:

- > High Tensile Strength and Toughness
- > High Hardness up to 41 HRC
- > Excellent Corrosion Resistance
- > Suitable for Forging and Welding
- > Good machinability
- > Good Oxidation Resistance.
- > Close hardness range of 29-33 HRC
- > Ambica's 17-4 material has good resistance to sulphide stress cracking at Rockwell C 33 hardness (max) as per NACE MR-01-75
- > AS 9100 C / EN 9100 C approved materials



Cold Finished Products




Bright Round Bars



Hexagon and Square Bars




Precision Round Bars

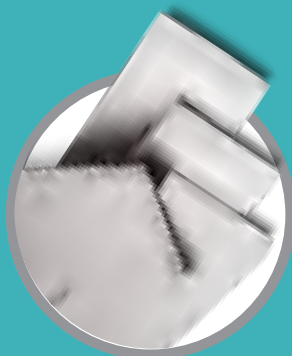

HRAP Flat Bars
Cold Drawn Flat Bars

5 Chamfering Machines	14 Grinding Machines
4 Cold Drawing Machines	5 Section Straightening Machines
6 Peeling Machines	263 Employee
7 Straightening Machines	4 Polishing machines
2 Shot blasting machines	

Manufacturing Process

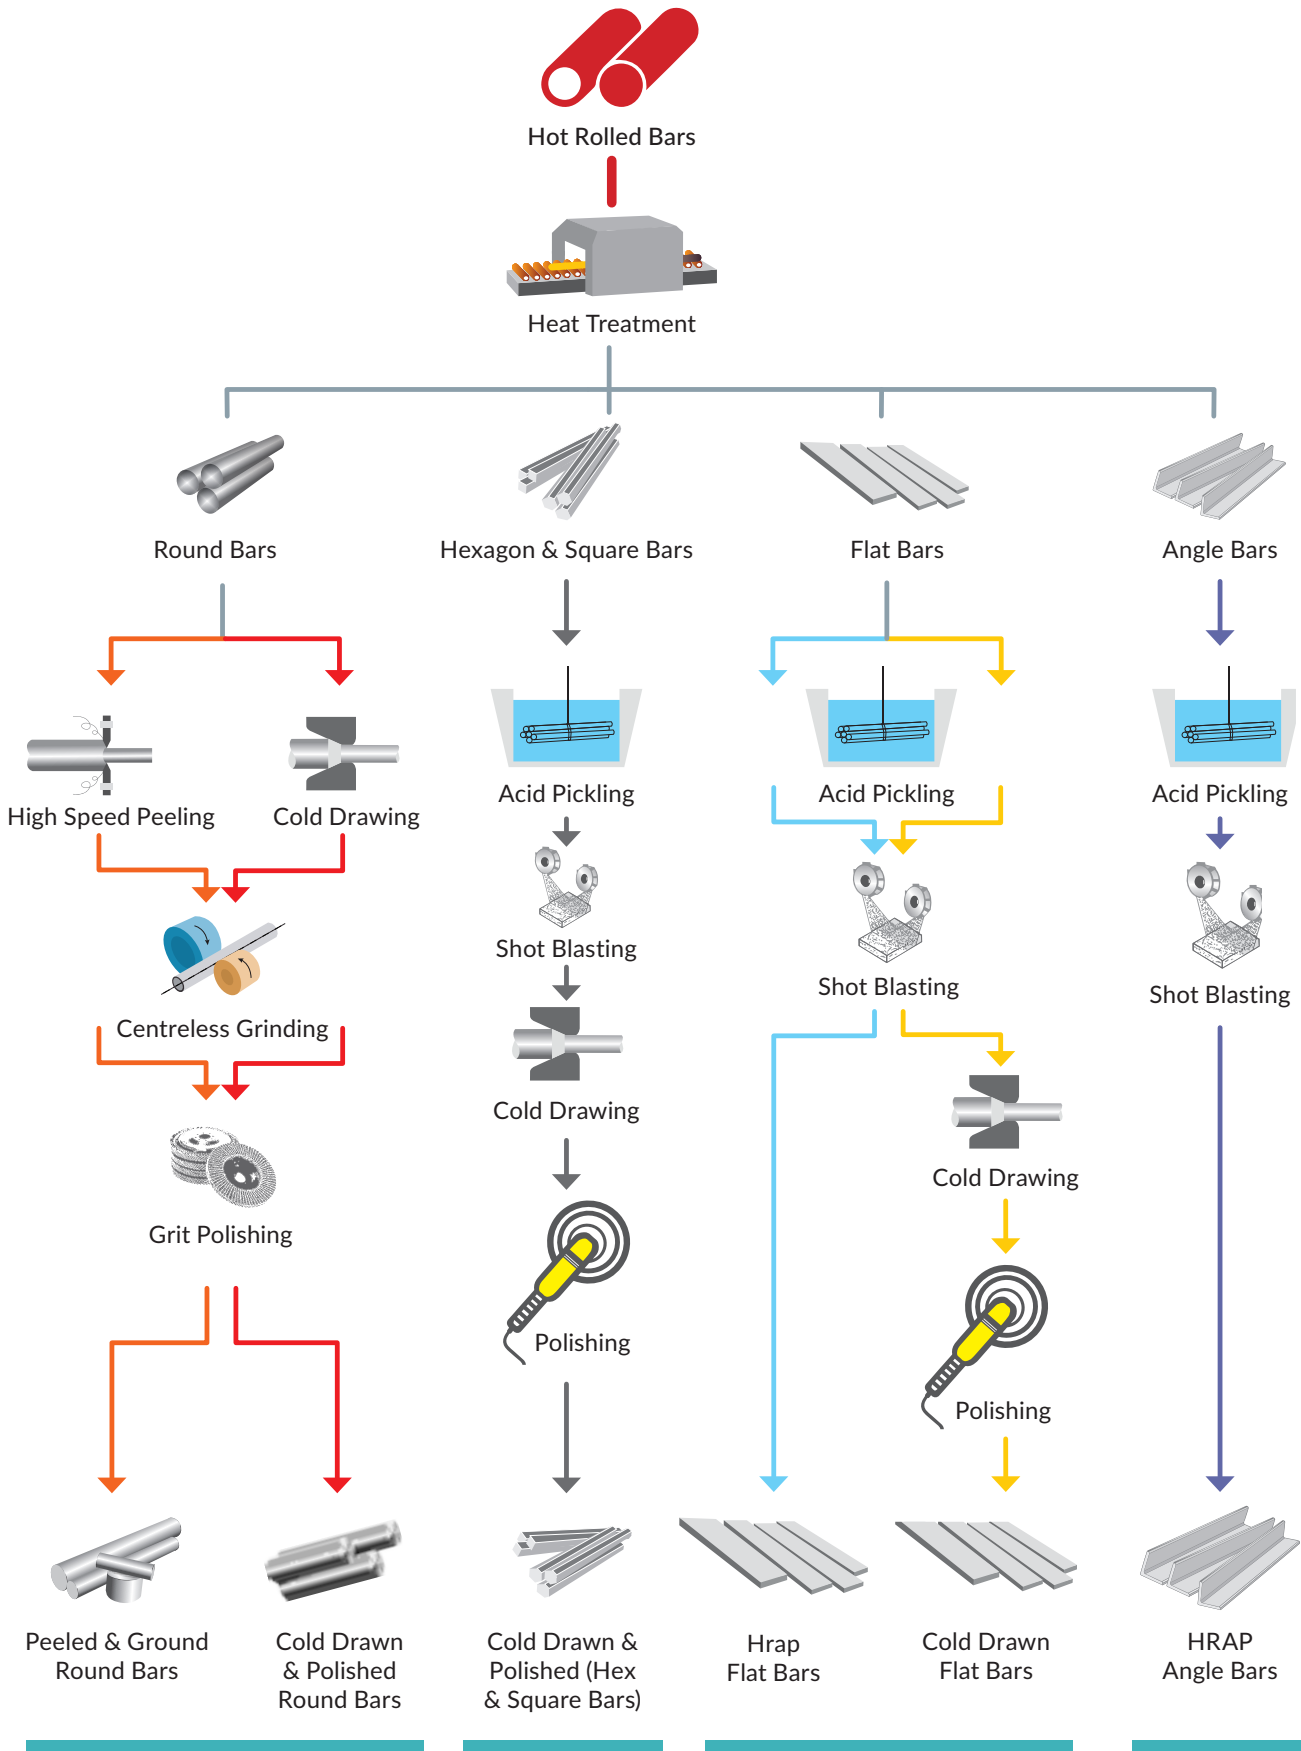

Bright Round Bars

With Bright Bar processing facility of more than 50,000 tons per year, Ambica is one of the largest producers of cold finished bars in India.

Ambica offers high-quality "Improved Machining (IM)" stainless steel bright round bars. The key to improved machinability lies in the special melting process adopted by Ambica, with a greater control upon non-metallic inclusion in the liquid metal.

Size range	8 mm - 105 mm (5/16 inch to 4-1/8 inch)
Size tolerances	h9, h10, h11, k12, k13, A-484, EN 10060, DIN-1013, etc.
Length	2 metres - 6 metres
Chamfering	Available in 30 deg. to 60 deg. through fully automatic both-end chamfering machine in sizes 12 mm to 80 mm
Crack Test	Magnetic particle Inspection (MPI), Eddy Current Testing
Ultrasonic Test	100% tested through Fully Automatic Ultrasonic Machine, as per ASTM A-388, EN 10308 (class 1 to 4), API 6A/ISO 10423:2003-PSL 3, SEP 1920:1984 (class A,B,C), MIL STD 2154
Length Tolerance	Available in special cut to length bars with tolerance of 50 mm (2 inches)
Straightness	Max upto 0.5 MM/M (0.006 inch/feet)
Surface Finish	Centreless Ground & Belt Polished upto Ra value 0.5 microns (24 RMS) and 240-320 Grit Polished
Heat Treatment	Annealed, Solution Annealed, Quenched & Tempered (QT), Double Ageing/Double Tempering



Hexagon And Square Bars

Ambica offers very high-quality “Improved Machining (IM)” stainless steel Hexagon and Square bars.

Each batch of Squares / Hexagons is heat treated under a very controlled thermometry followed with a rapid quenching process in order to arrive at the most reliable product with an increased consistency in the mechanical properties and a very high machinability.

Cold Drawn Hex/ Square Bars	
Hexagon Sizes	12 mm - 65 mm (1/2 inch to 2-1/2 inch)
Square Sizes	12 mm - 40 mm (1/2 inch to 1-1/2 inch)
Size tolerances	h11, ASTM A484
Length	2 metres - 6 metres
Chamfering	Available in 30 degrees to 60 degrees through fully automatic both-end chamfering machine (Only in Hexagon bars)
Crack Test	Magnetic particle Inspection (MPI)
Ultrasonic Test	100% tested through Fully Automatic Ultrasonic Testing Machine, as per ASTM A-388, EN 10308 (class 1 to 4), API 6A/ ISO 10423:2003-PSL 3, SEP 1920:1984 (class A,B,C), MIL STD 2154
Length Tolerance	Available in special cut to length bars with tolerance of 50 mm (2 inches)
Surface Finish	Cold Drawn Condition and Belt Polished condition
Heat Treatment	Solution Annealed, Annealed
Grades	AISI : 303, 304L, 316L, 316Ti, 321, 410, 430 F, 430, 416
	DIN : 1.4305, 1.4307, 1.4404, 1.4571, 1.4541, 1.4104, 1.4016, 1.4005


HRAP Square Bars	
HRAP Square Sizes	14, 15, 16, 17, 18, 20, 21, 22, 23.5, 25, 26.5, 28, 30, 32, 34, 36, 38, 40, 42 mm
	0.55", 0.59", 0.62", 0.66", 0.70", 0.78", 0.82", 0.86", 0.92", 1", 1.04", 1.10", 1.18", 1.25", 1.33", 1.41", 1.50", 1.57", 1.65"
Size tolerances	ASTM A 484 and EN 10059
Length	2 metres - 6 metres (8 to 20 feet)
Crack Test	Magnetic particle Inspection (MPI)
Ultrasonic Test	100% tested through Digital Ultrasonic Flaw Detector, as per ASTM A-388, EN 10308 (class 1 to 4)
Length Tolerance	Available in special cut to length bars with tolerance of 100 mm (4 inches)
Surface Finish	HRAP Condition
Heat Treatment	Solution Annealed, Annealed
Grades	AISI : 303, 304L, 316L, 316Ti, 321, 410, 430, 430 F, 630/17-4 PH
	DIN : 1.4305, 1.4307, 1.4404, 1.4571, 1.4541, 1.4006, 1.4104, 1.4016, 1.4542



HRAP Flat Bars

Size tolerances	ASTM A 484 and EN 10058
Length	2 metres - 6 metres (8 to 20 feet)
Length Tolerance	Available in special cut to length bars with tolerance of 100 mm (4 inches)
Surface Finish	HRAP Condition
Heat Treatment	Solution Annealed
Grades	AISI: 303, 304L, 316L, 316Ti, 321, 630/17-4 PH, F 51
	DIN: 1.4305, 1.4307, 1.4404, 1.4571, 1.4541, 1.4542, 1.4821, 1.4462

			Thickness										
			4 mm	5 mm	6 mm	8 mm	10 mm	12 mm	15 mm	20 mm	25 mm	30 mm	
			-	3/16"	1/4"	5/16"	3/8"	1/2"	5/8"	3/4"	1"	1.1/4"	
Width	38 mm	1.1/2"	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗
	40 mm	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	45 mm	1.3/4"	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	50 mm	2"	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	60 mm	-	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	65 mm	2.1/2"	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	70 mm	-	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	75 mm	3"	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	80 mm	-	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	90 mm	3.1/2"	✗	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗
	100 mm	4"	✗	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗
	110 mm	-	✗	✗	✗	✓	✓	✓	✓	✓	✓	✓	✗
	120 mm	4.3/4"	✗	✗	✗	✓	✓	✓	✓	✓	✓	✓	✗
	125 mm	5"	✗	✗	✗	✓	✓	✓	✓	✓	✓	✓	✗
	130 mm	5.1/8"	✗	✗	✗	✓	✓	✓	✓	✓	✓	✓	✗
150 mm	6"	✗	✗	✗	✓	✓	✓	✓	✓	✓	✓	✗	

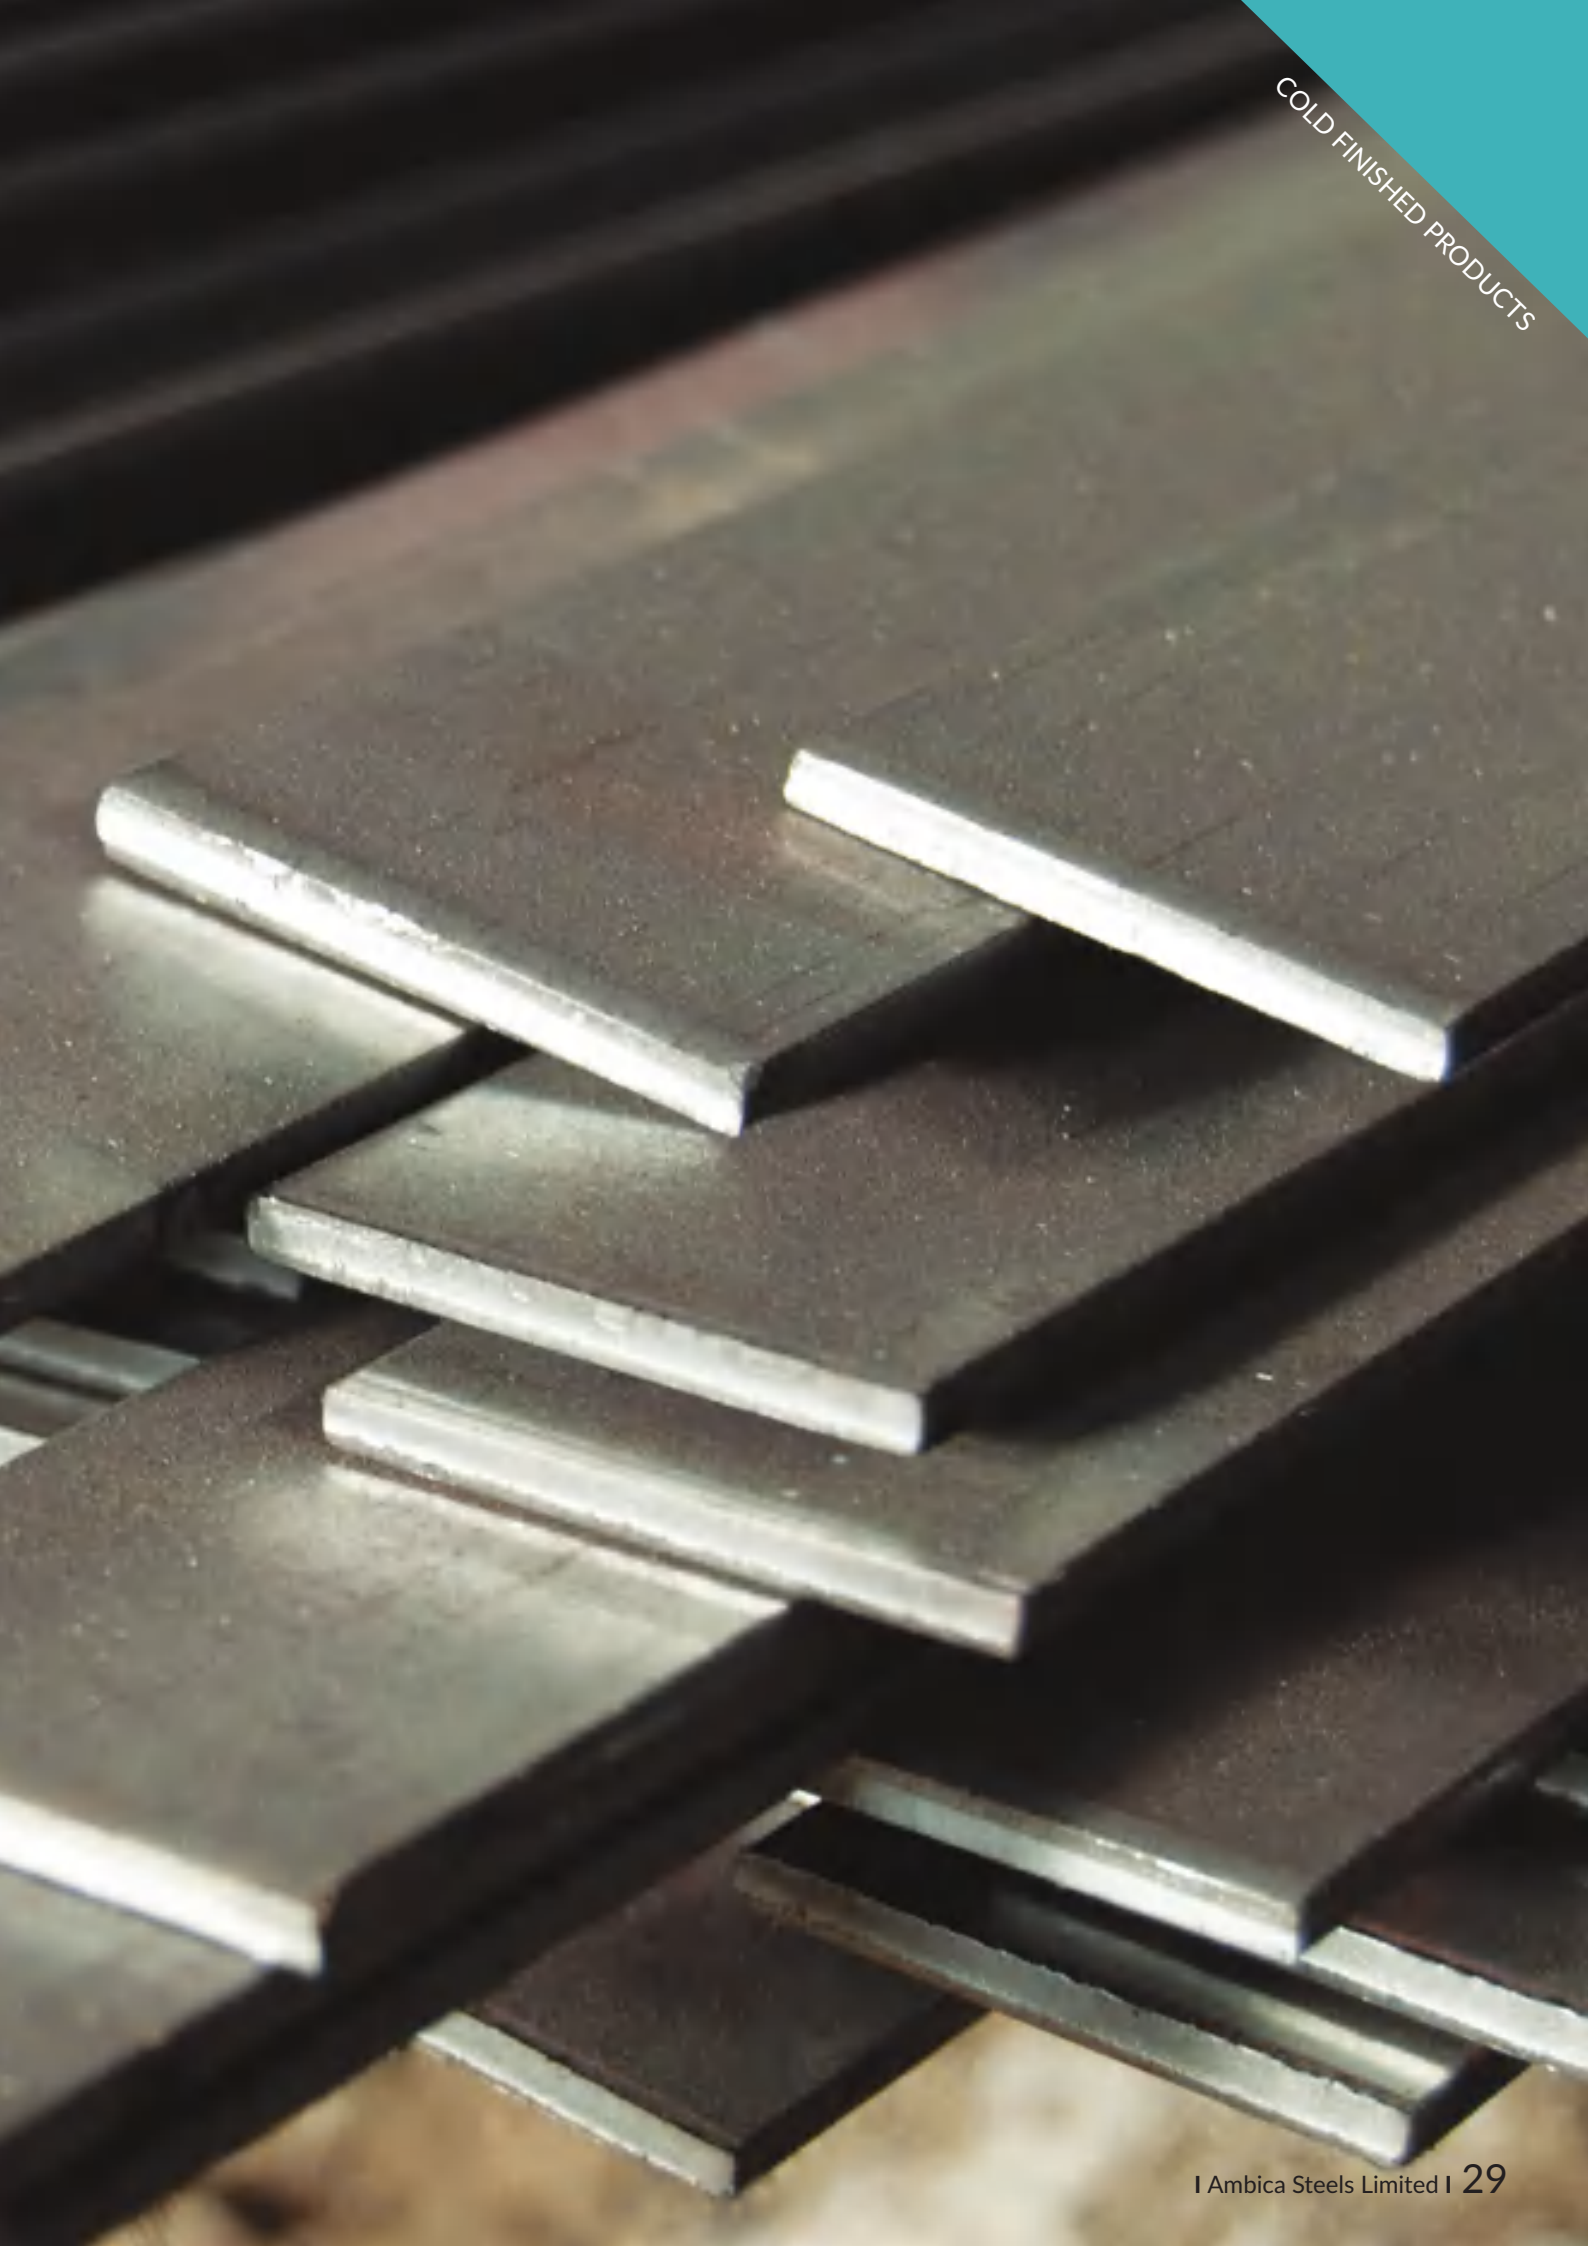

Cold Drawn Flat Bars

Ambica is one of the largest producer of cold finished bars in India. Drawing is a metal working process in which metal is drawn through a die to reduce its diameter and increase its length, it stretches thinner, into a desired shape and thickness. It uses tensile forces to stretch metal. Drawing is usually done at room temperature, thus classified as a cold working process. It also alters the mechanical properties of the metal. Cold drawn cross-sections are more precise and have a better surface finish than hot extruded parts.

Size tolerances	h11 and ASTM A 484
Length	2 metres - 6 metres (8 to 20 feet)
Length Tolerance	Available in special cut to length bars in tolerance -0/+50 mm (-0/+2 inch)
Surface Finish	Cold Drawn and Belt Polished Condition
Heat Treatment	Solution Annealed
Grades	AISI : 303, 304L, 316L, 316Ti, 321
	DIN : 1.4305, 1.4307, 1.4404, 1.4571, 1.4541

Size Chart												
WIDTH (mm)	4 mm	5 mm	6 mm	8 mm	10 mm	12 mm	15 mm	16 mm	20 mm	25 mm	30 mm	31.75 mm
40 mm	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-
45 mm	-	-	-	✓	-	-	✓	-	✓	-	-	-
50 mm	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-
60 mm	-	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	-
63.5 mm	-	-	-	-	-	-	-	-	-	-	-	✓
70 mm	-	-	-	✓	✓	✓	✓	-	✓	-	✓	-
80 mm	-	✓	✓	✓	✓	✓	✓	-	✓	-	✓	-
90 mm	-	-	-	✓	✓	✓	✓	-	-	-	-	-
100 mm	-	-	✓	✓	✓	✓	✓	-	✓	-	-	-

COLD FINISHED PRODUCTS



Precision Round Bars

Pump Shaft Quality (PSQ) Bars Boat Shaft Quality (BSQ) Bars

Cold worked Precision Bars is one of Ambica's premium product lines. These super finished precision bars are processed using the ultra-modern combined lines and state of the art equipment.

Ultrasonic Inspection and Eddy Current Testing ensures that the bars are free from any internal defects. The bars are then finished using specially designed finishing machines which ensures that the size tolerance (including the out of roundness) and surface roughness are achieved as desired.

Size range	12 mm to 100 mm (1/2 inch to 4 inch)
Size tolerances	f7, f8, h7,h8 and k6
Length	2 metres - 6 metres
Ovality	Half of diameter tolerance
Chamfering	Available in 30 degrees to 60 degrees through fully automatic both-end chamfering machine
Crack Test	Magnetic particle Inspection (MPI), Eddy Current Testing
Ultrasonic Test	100% tested through Fully Automatic Ultrasonic Testing Machine, as per ASTM A-388, EN 10308 (class 1 to 4), API 6A/ISO 10423:2003-PSL 3, SEP 1920:1984 (class A,B,C), MIL STD 2154
Length Tolerance	Available in special cut to length bars in tolerance -0/+25 mm (-0/+1 inch)
Straightness	Up to 0.25 mm/metre TIR (0.0015 inch/feet)
Surface Finish	Centreless Ground & Belt Polished upto Ra value 0.4 microns (16 RMS) and 240-320 Grit Polished
Heat Treatment	Annealed, Solution Annealed, Quenched & Tempered (QT), Double Ageing/Double Tempering
Packaging	Packaging is done using a variety of protective materials and distance rings, and then places in the strong plywood boxes to ensure safety of material during transportation



HRAP Angle Bars

Size tolerances	ASTM A 484 and EN 10056
Length	2 metres - 6 metres (8 to 20 feet)
Length Tolerance	Available in special cut to length bars in tolerance -0/+100 mm (-0/+4 inch)
Surface Finish	HRAP Condition
Heat Treatment	Solution Annealed
Grades	AISI : 304L and 316L
	DIN : 1.4307 and 1.4404

			Thickness								
			3 mm	4 mm	5 mm	6 mm	7 mm	8 mm	9 mm	10 mm	12 mm
			1/8"	-	3/16"	1/4"	-	5/16"	-	3/8"	1/2"
SIZE	25 x 25 mm	1" x 1"	✓	✓	✓	✓	✗	✗	✗	✗	✗
	30 x 30 mm	-	✓	✓	✓	✓	✗	✗	✗	✗	✗
	32 x 32 mm	1.1/4" x 1.1/4"	✓	✓	✓	✓	✗	✗	✗	✗	✗
	35 x 35 mm	-	✓	✓	✓	✓	✗	✗	✗	✗	✗
	40 x 40 mm	1.1/2" x 1.1/2"	✗	✓	✓	✓	✗	✗	✗	✗	✗
	45 x 45 mm	-	✗	✓	✓	✓	✗	✗	✗	✗	✗
	50 x 50 mm	2" x 2"	✓	✓	✓	✓	✗	✗	✗	✗	✗
	55 x 55 mm	-	✗	✗	✓	✓	✗	✗	✗	✗	✗
	60 x 60 mm	-	✗	✗	✓	✓	✗	✗	✗	✗	✗
	65 x 65 mm	2.1/2" x 2.1/2"	✗	✗	✓	✓	✗	✓	✗	✓	✗
	70 x 70 mm	-	✗	✗	✗	✓	✓	✓	✗	✗	✗
	75 x 75 mm	3" x 3"	✗	✗	✓	✓	✓	✓	✓	✓	✗
	80 x 80 mm	-	✗	✗	✗	✓	✓	✓	✓	✗	✗
	90 x 90 mm	3.1/2" x 3.1/2"	✗	✗	✗	✓	✗	✓	✓	✓	✗
100 x 100 mm	4" x 4"	✗	✗	✗	✓	✗	✓	✓	✓	✓	



Stainless Steel Grades

Grades		Reference Chemistry (%)												
Type	EN	ASTM	C	Si	Mn	P	S	Cr	Mo	Ni	N2	Other		
	1.4305	303	max 0.10	max 1	max 2	max 0.045	0.15 - 0.35	17.0-19.0		8.0-10.0	max 0.11	Cu-1.0 max	R Hx Sq F B	
	1.4301	304	max 0.07	max 1	max 2	max 0.045	max 0.030	18.0-20.0		8.0-10.5	max 0.11		R Hx Sq F B (In)	
	1.4307	304 L	max 0.03	max 1	max 2	max 0.045	max 0.030	18.0-20.0		8.0-10.5	max 0.11		R Hx Sq F B (In)	
	1.4306	304 L	max 0.03	max 1	max 2	max 0.045	max 0.030	18.0-20.0		10.0-12.0	max 0.11		R Hx Sq F B (In)	
	1.4948	304 H	0.04-0.08	max 1	max 2	max 0.035	max 0.015	18.0-20.0		8.0-10.5	max 0.11		R Hx Sq F B (In)	
	1.4311	304 LN	max 0.03	max 1	max 2	max 0.045	max 0.030	17.5-19.5		8.5-11.5	0.12-0.22		R B (In)	
	---	304 N	max 0.08	max 1	max 2	max 0.045	max 0.030	18.0-20.0		8.0-11.0	0.10-0.16		R B (In)	
	---	309	max 0.20	max 0.75	max 2	max 0.045	max 0.030	22.0-24.0		12.0-15.0			R B (In)	
	1.4828	X15CrNiSi20-12	max 0.20	1.5 - 2.5	max 2	max 0.045	max 0.015	19.0-21.0		11.0-13.0	max 0.11		R B (In)	
	1.484	310	max 0.25	max 1	max 2	max 0.045	max 0.030	24.0-26.0		19.0-22.0			R B (In)	
	1.4845	310 S	max 0.08	max 1.5	max 2	max 0.045	max 0.030	24.0-26.0		19.0-22.0			R B (In)	
	1.4401	316	max 0.07	max 1	max 2	max 0.045	max 0.030	16.5-18.5	2.0 - 2.5	10.0-13.0	max 0.11		R Hx Sq F B (In)	
	1.4404	316 L	max 0.03	max 1	max 2	max 0.045	max 0.030	16.5-18.5	2.0 - 2.5	10.0-13.0	max 0.11		R Hx Sq F B (In)	
	1.4571	316 Ti	max 0.08	max 1	max 2	max 0.045	max 0.030	16.5-18.5	2.0 - 2.5	10.5-13.5		Ti = 5(C+N) - 0.70	R Hx Sq F B (In)	
	1.4919	316 H	0.04-0.08	max 1	max 2	max 0.035	max 0.015	16.5-18.5	2.0 - 2.5	10.0-13.0	max 0.11	B = 0.0015 -0.0050	R Sq B (In)	
	1.4406	316 LN	max 0.03	max 1	max 2	max 0.045	max 0.015	16.5-18.5	2.0 - 2.5	10.0-12.0	0.12-0.22		R B (In)	

A U S T E N I T I C

Grades		Reference Chemistry (%)										
Type	EN	ASTM	C	Si	Mn	P	S	Cr	Mo	Ni	N2	Other
	1.4432	316 L	max 0.03	max 1	max 2	max 0.045	max 0.030	16.5- 18.5	2.5 - 3.0	10.5-13.5	max 0.11	R Hx Sq F B In
	1.4435	316 L	max 0.03	max 1	max 2	max 0.045	max 0.030	17.0- 19.0	2.5 - 3.0	12.5-15.0	max 0.11	R Hx Sq F B In
	1.4436	316 L	max 0.05	max 1	max 2	max 0.045	max 0.030	16.5- 18.5	2.5 - 3.0	10.5-13.5	max 0.11	R Hx Sq F B In
	1.3952	X2CrNiMoN 18-14-3	max 0.03	max 1	max 2	max 0.045	max 0.015	16.5- 18.5	2.5 - 3.0	13.0- 15.0	0.15-0.25	R B
	1.4438	317 L	max 0.03	max 1	max 2	max 0.045	max 0.030	17.5- 19.5	3.0 - 4.0	13.0-16.0	max 0.11	R B In
	1.4541	321	max 0.08	max 1	max 2	max 0.045	max 0.030	17.0- 19.0		9.0 - 12.0		R Hx Sq F B
	1.4878	321 H	0.04-0.10	max 1.0	max 2	max 0.045	max 0.030	17.0- 19.0		9.0 - 12.0		R Sq B In
	1.4550	347	max 0.08	max 1	max 2	max 0.045	max 0.030	17.0- 19.0		9.0 - 12.0		R B In
	---	347 H	0.04-0.10	max 1	max 2	max 0.045	max 0.030	17.0- 20.0		9.0 - 13.0		R B In
	Nitronic 50	XM-19	max 0.06	max 1	4.0 - 6.0	max 0.045	max 0.030	20.5-23.5	1.5 - 3.0	11.5 - 13.5	0.20-0.40	R B In
	1.4462	F 51	max 0.03	max 1	max 2	max 0.030	max 0.020	21.0-23.0	2.5 - 3.5	4.5 - 6.5	0.08-0.20	R F B In
	1.4410	F 53	max 0.03	max 0.8	max 1.2	max 0.035	max 0.020	24.0-26.0	3.0 - 5.0	6.0 - 8.0	0.24-0.32	R B In
	1.4501	F 55	max 0.03	max 1	max 1	max 0.030	max 0.100	24.0-26.0	3.0 - 4.0	6.0 - 8.0	0.20-0.30	In
	1.4460	329	max 0.05	max 1	max 2	max 0.035	max 0.030	25.0-28.0	1.3 - 2.0	4.5 - 4.6	0.05-0.30	R B In
	1.4462	F 60	max 0.03	max 1	max 2	max 0.030	max 0.015	22.0-23.0	3.0 - 3.5	4.5 - 6.5	0.14-0.20	R B In
	1.4362	2304	max 0.03	max 1	max 2	max 0.035	max 0.015	22.0-24.0	0.1 - 0.6	3.5 - 5.5	0.05-0.20	R B In
	1.4821	---	0.10-0.20	0.8 - 1.5	max 2	max 0.040	max 0.015	24.5-26.5		3.5 - 5.5	max 0.11	R F B In

D
U
P
L
E
X



Grades		Reference Chemistry (%)												
Type	EN	ASTM	C	Si	Mn	P	S	Cr	Mo	Ni	N2	Other		
	1.4003	403	max 0.03	max 1	max 1.5	max 0.040	max 0.030	10.5 - 12.5		0.30 - 1.0		R B In		
	1.4006	410	0.08 - 0.15	max 1	max 1.5	max 0.040	max 0.030	11.5 - 13.5		max 0.75		R Hx Sq B In		
	---	410 S	max 0.08	max 1	max 1	max 0.04	max 0.030	11.5 - 13.5		max 0.6		B In		
	1.4005	416	0.06 - 0.15	max 1	max 1.5	max 0.040	0.15 - 0.35	12.0 - 14.0	max 0.60			R B In		
	1.4021	420	0.16 - 0.25	max 1	max 1.5	max 0.040	max 0.030	12.0 - 14.0				R B In		
	1.4028	420 B	0.26 - 0.35	max 1	max 1.5	max 0.040	max 0.030	12.0 - 14.0				R B In		
	1.4034	420 C	0.43 - 0.50	max 1	max 1	max 0.040	max 0.030	12.5 - 14.5				R B In		
	20X13(GOST)		0.16-0.25	max 0.8	max 0.8	max 0.030	max 0.025	12.0-14.0	max 0.30	max 0.60		R B In		
	30X13(GOST)		0.26-0.35	max 0.8	max 0.8	max 0.030	max 0.025	12.0-14.0	max 0.30	max 0.60		R B In		
	40X13(GOST)		0.36-0.45	max 0.8	max 0.8	max 0.030	max 0.025	12.0-14.0	max 0.30	max 0.60		R B In		
	1.4104		0.10 - 0.17	max 1	max 1.5	max 0.040	0.15 - 0.35	15.50 - 17.5	0.2 - 0.6			R Hx B In		
	1.4057	431	0.12 - 0.22	max 1	max 1.5	max 0.040	max 0.030	15.0 - 17.0		1.5 - 2.5		R B In		
	---	431 S29	0.12 - 0.20	max 1	max 1	max 0.040	max 0.030	15.0 - 18.0		2.0 - 3.0		B In		
	1.4313	F6-NM	max 0.05	max 0.7	max 1.5	max 0.040	max 0.015	12.0 - 14.0	0.3 - 0.7	3.5 - 4.5	min 0.02	R B In		
	1.4913	X19CrMoVNbN 11-1	0.17 - 0.23	max 0.5	0.4 - 0.9	max 0.025	max 0.015	10.0 - 11.5	0.5 - 0.8	0.2 - 0.6	0.05 - 0.10	R B In	Al = max 0.02 B = max 0.0015 Nb = 0.25 - 0.55V = 0.10 - 0.3	
	1.4923	X22CrMoV12-1	0.18 - 0.24	max 0.5	0.40 - 0.90	max 0.025	max 0.015	11.0 - 12.5	0.8 - 1.2	0.3 - 0.8		R Hx B In	V = 0.25 - 0.35	
	1.4122	X39CrMo17-1	0.33 - 0.45	max 1	max 1.5	max 0.040	max 0.030	15.5 - 17.5	0.8 - 1.3	max 1.00		R B In		

M A R T E N S I T I C

Grades		Reference Chemistry (%)										
Type	EN	ASTM	C	Si	Mn	P	S	Cr	Mo	Ni	N2	Other
	1.4418	---	max 0.06	max 0.7	max 1.5	max 0.040	max 0.015	15.0 - 17.0	0.8 - 1.5	4.0 - 6.0	max 0.02	R B
	1.4031	---	0.36 - 0.42	max 1	max 1	max 0.040	max 0.030	12.5 - 14.5				R B
	1.4002	405	max 0.08	max 1	max 1	max 0.040	max 0.030	11.5 - 14.5		max 0.50		R B
	1.4512	409 Ti	max 0.03	max 1	max 1	max 0.040	max 0.020	10.5 - 11.70		max 0.50		R B
	---	409 Nb	max 0.030	max 1	max 1	max 0.040	max 0.030	10.5 - 11.70		0.75 - 1.0	max 0.04	R Hx Sq B
	1.4105	430 FR	max 0.08	max 1.5	max 1.5	max 0.040	max 0.020	10.5 - 11.70		max 0.50		R B
	1.4016	430	max 0.12	max 1	max 1	max 0.040	max 0.030	16.0 - 18.0				R Hx B In
	---	430 F	max 0.12	max 1	max 1.25	max 0.060	min 0.150	16.0 - 18.0				
	1.4511	430 LNb	max 0.05	max 1	max 1	max 0.040	max 0.030	16.0 - 18.0				R B In
	1.4510	439 Ti	max 0.05	max 1	max 1	max 0.045	max 0.030	16.0 - 18.0				R Sq B In
	1.4114		0.015-0.025	max 1	max 0.6	max 0.030	0.020-0.030	17.50-19.50	1.50-2.50	max 0.30		R B
	1.4509	441	max 0.03	max 1	max 1	max 0.040	max 0.015	17.5 - 18.5				R B In
	1.4542	17-4 PH / 630	max 0.07	max 1	max 1	max 0.040	max 0.030	15.0 - 17.5	max 0.60	3.0 - 5.0		R Hx Sq F B In
	1.4594	---	max 0.07	max 0.7	max 1	max 0.040	max 0.015	13.0 - 15.0	1.20-2.0	5.0 - 6.0		In
	1.4713	---	0.12	0.05 - 1.0	max 1	max 0.40	max 0.015	6.0 - 8.0				AL = 0.50 - 1.0



Round bar



Hexagon bar



Flat bar



Square bar



Billets



Ingnots



Location:
UPSIDC Industrial Area,
Sahibabad



AMBICA

STRONG SINCE 1970





AMBICA

STRONG SINCE 1970

CONTACT US

HEAD OFFICE

Ambica Steels Limited
C-54/1, Wazirpur Industrial Area
New Delhi 110 052, India
T: +91 (11) 47034400 (30 lines)

EUROPEAN OFFICE

Ambica Edelstahl GmbH
Raum 204, Arnoid-Sommerfeld-Ring 2,
52499Baesweiler, Germany
T: +49 (0) 2401 805 231

OUR WORKS

Melting, Refining and Casting Division

Plot no. 51/2, Site - 4
UPSIDC Industrial Area
Sahibabad 201 010, District Ghaziabad
Uttar Pradesh, India
T: +91 (120) 4189300 (30 lines)
F: +91 (120) 4189399

Hot Rolling, Heat Treatment & Cold Finishing Division - I

Plot No. 32, Site - 2
Loni Road Industrial Area, Mohan Nagar
Ghaziabad 201 007, Uttar Pradesh, India
T: +91 (120) 4189200 (30 lines)
F: +91 (120) 4189222

Cold Finishing Division - II

B - 11, UPSIDC Industrial Area,
Sahibabad 201 010, District Ghaziabad
Uttar Pradesh, India

Cold Finishing Division - III

C-11, Block A, Loha Mandi,
Bulandshahr Road Industrial Area,
Ghaziabad 201002
Uttar Pradesh, India

 info@ambicasteels.com

 www.ambicasteels.com

 <https://www.xing.com/companies/ambicaedelstahlgmbh>

 <https://www.youtube.com/c/AmbicaSteelsLtd>

 www.linkedin.com/company/ambica-steels-ltd



AMBICA STEELS LIMITED