



XCA500_Y_1 全地面起重机 / All Terrain Crane

技术规格书


Technical specifications



500 t



85 m

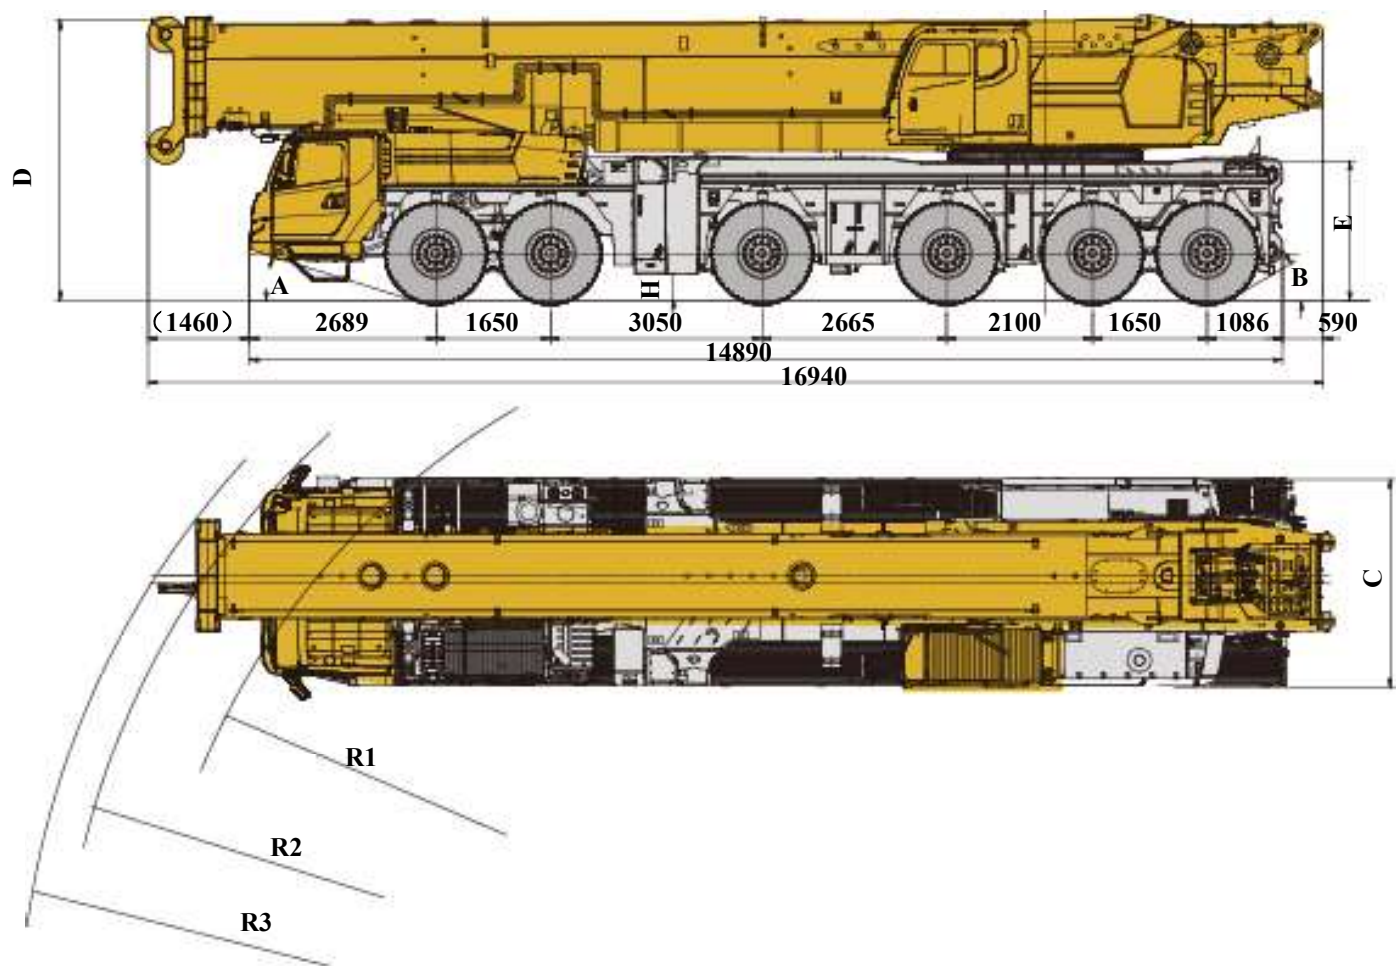


125 m



尺寸参数
Dimensions

55t行驶状态
55 t travel configuration



	A	B	C	D	E	H	R1	R2	R3
445/95 R 25 (16.00 R 25)	17°	30.4°	3000mm	4000mm	2015mm	330mm	6780	11650	13350

*D=4000mm
该状态为悬挂最低位状态
Suspensions at lowest position

作业速度 Working speed



445/95 R 25 (16.00 R 25)



2 ~ 80




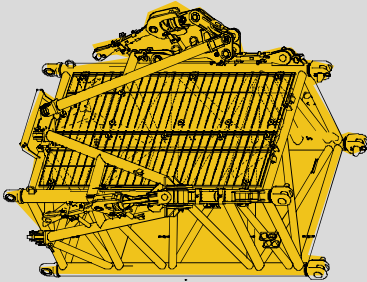

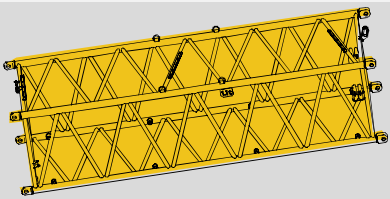
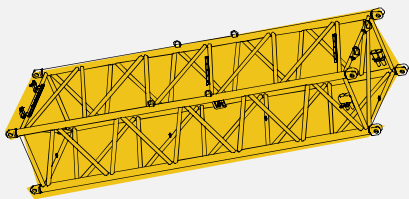
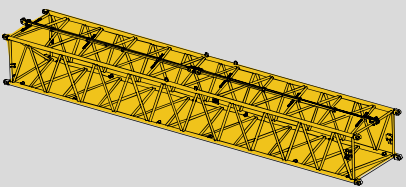
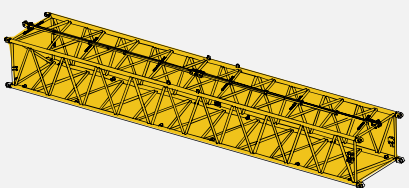
52%



作业机构 Operation mechanism	作业速度 Working speed	最大单绳拉力 Max. single line pull	钢丝绳直径/长度 Rope diameter/ length
	0-120 m/min, 单绳, 第5层, 空载 m/min, single line, 5th layer, no load	13.5 t	24 mm/520 mm
	0-1.2 r/min		
	从-0.5°抬起至82°约90s Approx. 90s for boom luffing from -0.5° to 82°		
	从16.1m伸出至85m约1300s Approx. 1300s for boom extension from 16.1 m to 85 m		




运输部件尺寸

Dimension and weight of parts transported

名称 Part Name	图示 Figure	单重 Weight (kg)	数量 Quantity	尺寸 Dimensions (mm)
连接架 (末节臂) Connecting bracket (last boom section)		958	1	2000×1800×1800
翼式连接架 Wing-type connecting bracket		2422	1	3800×2400×1800
安装组件 Installation assembly		7781	1	12300×3000×1600
加长节I Jib insert I		948	2	6300×1800×1500
加长节II Jib insert II		888	2	6300×1600×1200
加长节III Jib insert III		1688	2	12300×1800×1500
加长节IV Jib insert IV		1616	2	12300×1600×1200




运输部件尺寸

Dimension and weight of parts transported

名称 Part Name	图示 Figure	单重 Weight (kg)	数量 Quantity	尺寸 Dimensions (mm)
过渡节 Transition section		359	1	1800×1800×1500
臂头总成 Boom head assembly		636	1	2000×1600×1600
旋转架 Rotating bracket		1976	1	4400×2000×2300



运输部件尺寸

Dimension and weight of parts transported

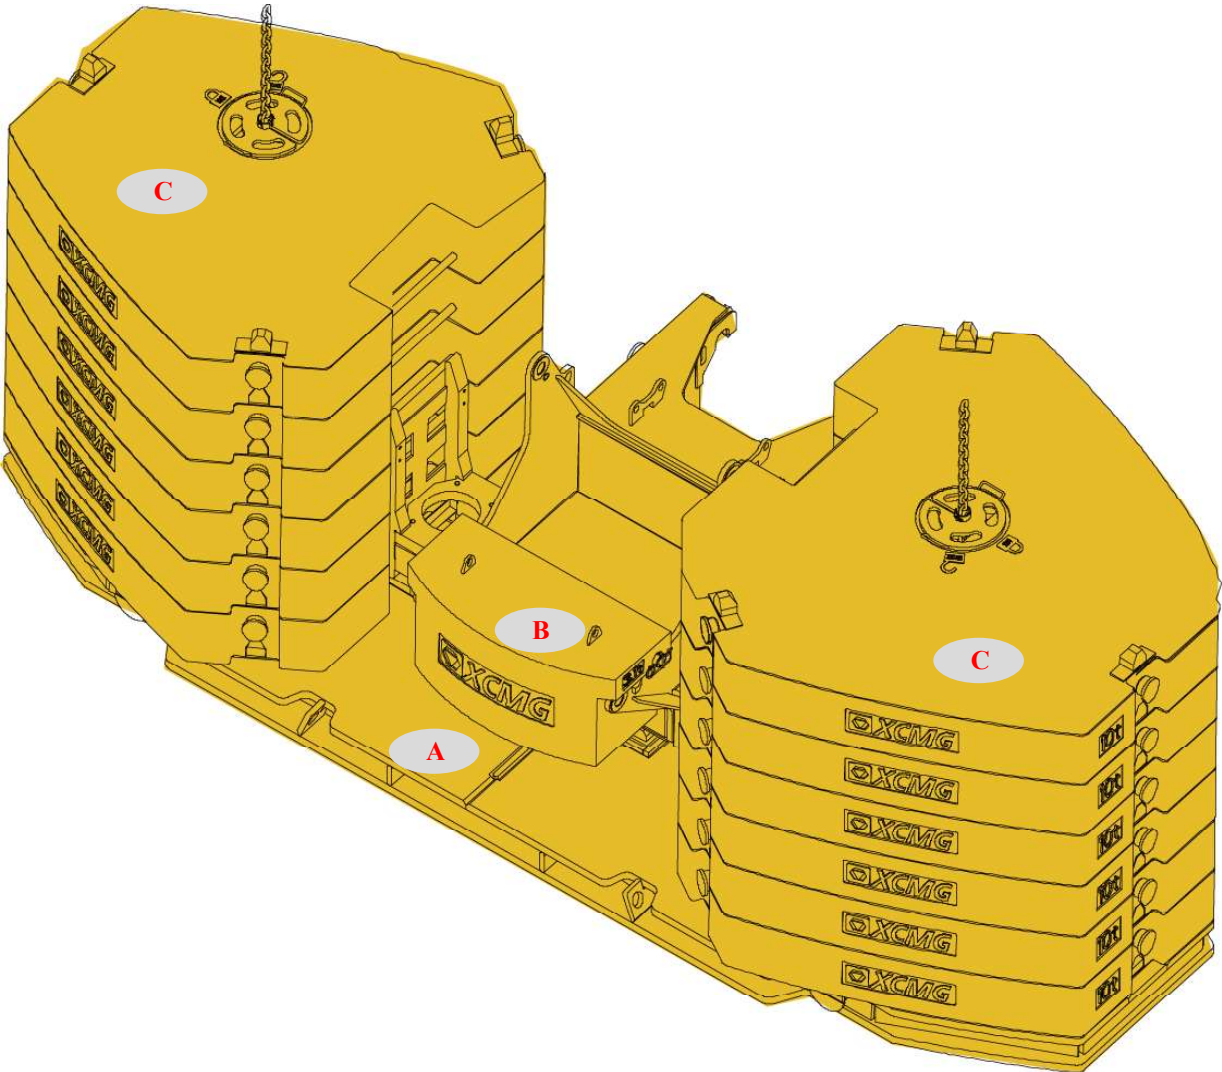
名称 Part Name	图示 Figure	单重 Weight (kg)	数量 Quantity	尺寸 Dimensions (mm)
超起装置 Super lifting device		18000	1	11000×3000×1550
超起托架 Super lifting device bracket		37	2	630×300×300 + 675×300×300
前支脚盘 Front outrigger float		62	2	176×600×681

运输部件尺寸

Dimension and weight of parts transported

名称 Part Name	图示 Figure	单重 Weight (kg)	数量 Quantity	尺寸 Dimensions (mm)
后固定支腿（含两组后 活动支腿总成、备胎及 备胎支架） Rear outrigger box (including 2 sets of rear outrigger beam assembly, spare tire and its bracket)		8920	1	2030×2980×2144
前活动支腿总成 Front outrigger beam assembly		2142	2	423×995×2923
配重支架 Counterweight bracket		25	1	400×200×300
		25	1	150×700×300

平衡重
Counterweight







平衡重 Counterweight	A	B	C
尺寸 (长×宽×高) mm Size (L×W×H) mm	6988×2790×2025	1400×835×623	2552×2350×515
重量 t Weight (t)	20	3	10




工况模式 Working mode	143 t	140 t	120 t	100 t	80 t	60 t	40 t
组合形式 Combinations	A+B+C×12	A+C×12	A+C×10	A+C×8	A+C×6	A+C×4	A+C×2

臂架组合方案

Boom / Jib combinations

固定副臂 – 6m Fixed jib – 6m	
固定副臂 – 12m Fixed jib – 12m	
固定副臂 – 18m Fixed jib – 18m	
固定副臂 – 24m Fixed jib – 24m	
固定副臂 – 30m Fixed jib – 30m	
固定副臂 – 36m Fixed jib – 36m	
固定副臂 – 42m Fixed jib – 42m	

臂架组合方案 Boom / Jib combinations

部件 Component	结构形式 Structure	尺寸 (长×宽×高) m Size (L×W×H) m	重量 kg Weight kg
连接架 I Connecting bracket I		2.0×1.8×1.8	958
翼型连接架 Wing-type connecting bracket		3.8×2.4×1.8	2422
旋转架 Rotating bracket		4.4×2.0×2.3	1976
连接架II Connecting bracket II		2.1×1.9×1.9	1080
安装组件 Installation assembly		12.3×3×1.6	7781
副臂加长节 I Jib insert I		6.3×1.8×1.5	948
副臂加长节 II Jib insert II		6.3×1.6×1.2	888
副臂加长节 III Jib insert III		12.3×1.8×1.5	1688
副臂加长节 IV Jib insert IV		12.3×1.6×1.2	1616
过渡节 Transition section		1.8×1.8×1.5	359
臂头 Head section		2.0×1.6×1.6	636

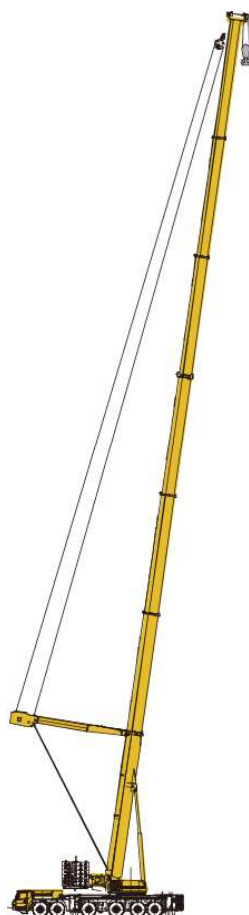
臂架组合方案

Boom / Jib combinations



主臂
Boom

T: 16.1~85 m



超起主臂
Super lifting device + boom

T: 37.2~85 m

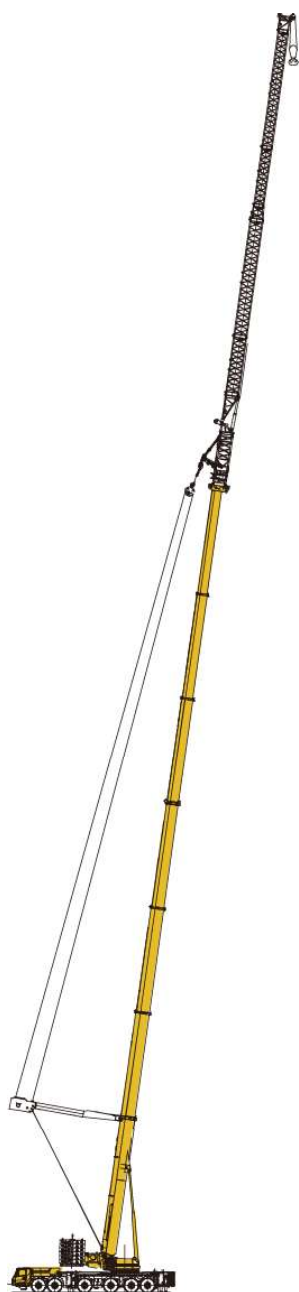


固定副臂
Fixed jib+ boom

T: 16.1~79.5 m+3 m
F: 6~42 m

臂架组合方案

Boom / Jib combinations



超起固定副臂

Super lifting device + fixed Jib

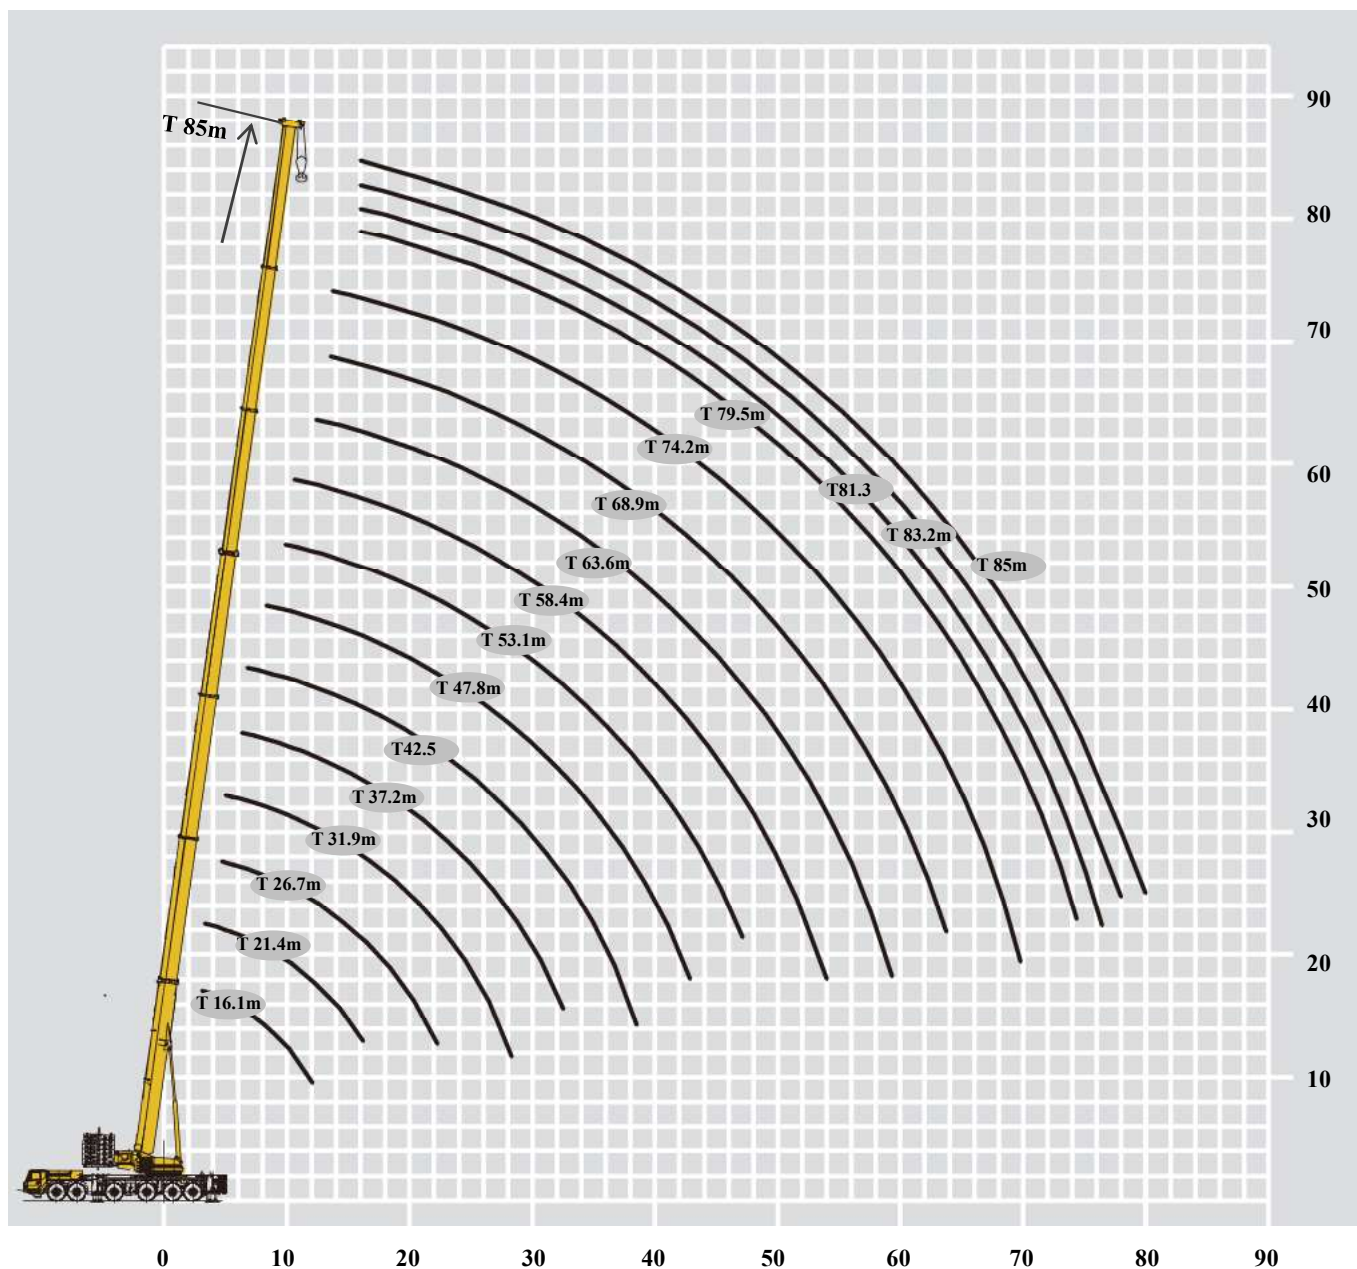
T: 53.1~79.5 m+ 6.5 m

F: 6~42 m

XCMG—XCA500_Y_1

起升高度曲线图 Lifting height chart


主臂
Boom



起重性能表

Rated lifting load table

T 16.1~85m



	16.1	21.4	21.4	21.4	26.7	26.7	26.7	31.9	31.9	31.9	37.2	37.2	37.2	42.5	42.5	
2.5	500*															
3	225.0															3
3.5	225.0	225.0	225.0	225.0												3.5
4	225.0	225.0	225.0	225.0	191.0	191.0	191.0									4
4.5	220.0	225.0	225.0	225.0	190.0	190.0	190.5	183.5	183.5	183.9						4.5
5	220.0	220.0	220.0	220.0	190.0	190.0	189.0	180.5	180.8	181.0						5
6	201.0	198.0	198.0	197.0	188.0	187.0	184.0	174.0	174.0	169.5	162.2	162.2	144.3			6
7	182.0	178.0	177.0	176.0	175.0	174.0	172.0	166.0	166.0	159.8	154.5	154.5	136.3	108.5	122.6	7
8	165.0	161.0	160.0	159.0	150.0	157.0	156.0	153.0	152.0	139.5	146.9	146.9	124.4	101.5	115.9	8
9	150.0	147.0	146.0	145.0	142.0	144.0	142.0	140.0	139.0	121.5	138.9	137.5	110.0	94.5	109.3	9
10	132.6	132.3	131.3	130.3	130.0	132.0	130.0	128.0	128.0	111.5	124.3	126.5	100.9	90.6	103.9	10
12	115.0	111.7	110.7	108.8	112.9	111.9	109.9	108.0	109.0	97.8	99.5	108.0	84.3	82.5	94.0	12
14		94.1	93.1	92.1	95.1	94.1	92.1	91.0	92.5	79.5	89.6	94.3	73.9	73.7	85.4	14
16		81.8	80.8	78.8	82.3	80.4	79.4	79.2	80.0	70.0	79.6	81.6	64.7	66.6	78.6	16
18					72.3	71.0	69.3	68.2	69.3	61.5	72.1	70.6	57.1	60.2	71.6	18
20					64.4	62.4	60.5	60.8	60.8	54.8	63.7	62.7	51.4	55.4	63.7	20
22					57.4	55.4	54.0	53.9	53.9	49.8	56.4	55.7	45.7	50.8	56.7	22
24								49.0	47.9	47.0	52.3	49.8	40.6	46.8	51.7	24
26								43.8	43.1	42.1	47.5	44.8	37.2	43.3	46.7	26
28								38.8	38.9	37.5	43.1	40.8	33.0	40.3	41.8	28
30											39.4	33.5	30.4	37.7	38.5	30
32											36.1	33.5	29.5	35.2	35.2	32
34														32.3	32.3	34
36														29.8	29.8	36
38														27.5	27.0	38
组合 Code	000000	001000	010000	100000	001100	011000	110000	111000	120000	210000	011110	111100	211000	011111	111110	组合 Code
倍率 n	20	20	20	20	17	17	17	16	16	16	14	14	12	9	10	倍率 n


*表示加特殊装置性能。

Note: the lifting load with a * followed is available only when additional equipment is used.

起重性能表

Rated lifting load table

T 16.1~85m




	42.5	47.8	47.8	47.8	53.1	53.1	53.1	58.4	58.4	63.6	63.6	
7	110.3											7
8	104.4	80.6	103.0	103.0								8
9	98.3	74.8	97.8	97.8	61.8	68.3	68.4					9
10	93.6	69.5	92.7	92.7	59.1	64.8	64.8	44.1	57.0			10
12	83.5	59.9	83.4	79.6	53.1	59.1	59.1	40.0	52.4	39.8	40.8	12
14	68.0	52.9	74.5	69.7	48.2	55.0	55.1	36.7	48.6	37.8	38.8	14
16	59.7	46.9	67.1	57.5	44.1	51.0	51.1	33.7	45.2	35.7	37.6	16
18	53.1	42.4	61.1	51.3	41.1	45.7	47.8	30.5	42.0	32.4	34.9	18
20	47.9	38.1	55.2	45.9	37.9	41.8	44.8	28.6	39.2	29.5	32.3	20
22	43.1	34.6	50.6	41.5	35.2	39.8	42.1	27.0	36.8	27.1	29.6	22
24	39.4	32.1	46.8	37.9	33.1	37.8	39.7	25.2	34.5	25.3	27.6	24
26	35.5	29.6	42.9	35.4	31.2	34.9	37.7	23.6	32.2	23.4	25.3	26
28	31.8	26.9	39.1	31.1	29.3	29.6	34.8	22.4	30.3	21.9	23.8	28
30	29.3	25.3	36.4	28.5	27.7	28.7	31.7	21.3	28.3	20.5	21.9	30
32	27.1	23.6	33.8	25.9	26.1	26.8	29.5	20.3	26.2	19.3	20.5	32
34	25.4	21.9	31.1	24.3	25.2	25.0	27.5	19.4	24.4	18.4	19.5	34
36	23.6	20.6	28.7	22.7	23.7	23.7	25.9	18.5	22.8	17.4	18.3	36
38	21.5	19.3	26.3	21.3	22.7	22.3	24.4	17.6	21.2	16.4	17.3	38
40		18.1	24.9	19.8	22.2	21.4	23.0	16.9	20.0	15.5	16.3	40
42		17.2	23.9	19.4	21.1	20.4	21.3	15.9	18.9	14.7	15.5	42
44					20.2	18.9	19.9	15.3	17.8	14.2	14.8	44
46					19.6	17.5	18.8	14.6	16.7	13.4	14.0	46
48								14.0	15.6	12.8	13.5	48
50								13.5	15.0	12.3	12.8	50
52								12.8	14.0	11.9	12.2	52
54										11.3	11.8	54
56										10.8	11.2	56
58										10.5	10.7	58
组合 Code	211100	021111	111111	211110	111112	111211	211111	111122	221111	111222	211122	组合 Code
倍率 n	9	7	9	9	5	6	6	4	5	3	4	倍率 n

起重性能表

Rated lifting load table

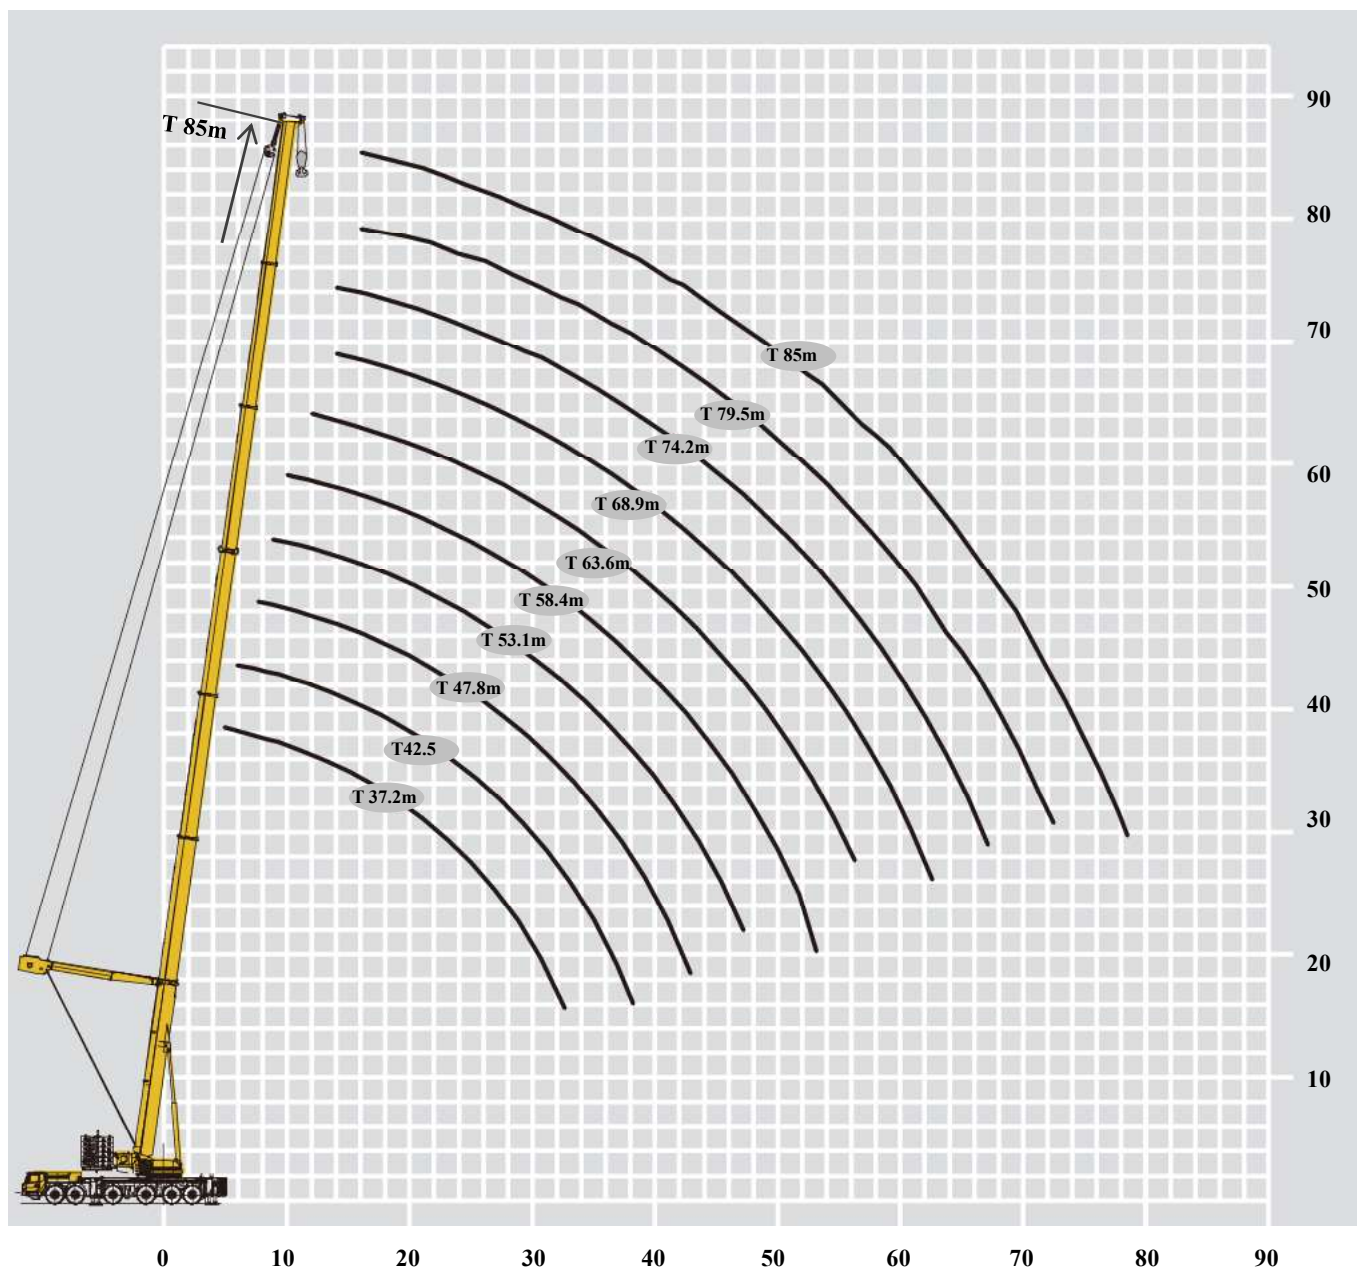
T 16.1~85m



	63.6	68.9	68.9	74.2	74.2	79.5	81.3	81.3	83.2	83.2	85	
12	45.0											12
14	41.5	30.8	36.2	31.2	31.3							14
16	38.4	28.6	33.8	29.7	29.7	25.2	22.4	22.3	21.0	21.0	20.1	16
18	36.1	26.8	31.4	28.0	28.0	24.2	21.6	21.6	20.2	20.2	19.3	18
20	33.6	25.1	29.4	26.5	26.5	23.3	20.8	20.8	19.4	19.4	18.5	20
22	31.6	23.7	27.9	24.9	24.9	22.2	20.0	20.0	18.5	18.5	17.6	22
24	29.8	22.3	26.2	23.4	23.4	21.0	19.2	19.2	17.8	17.8	16.9	24
26	28.1	21.0	25.0	21.9	21.9	19.8	18.4	18.4	17.1	17.1	16.1	26
28	26.2	19.4	23.7	20.7	20.7	18.7	17.6	17.6	16.3	16.3	15.2	28
30	24.7	18.2	22.3	18.9	19.7	17.6	16.8	16.8	15.6	15.7	14.4	30
32	22.6	17.1	20.5	17.7	18.7	16.6	16.0	16.0	14.9	14.9	13.6	32
34	21.1	16.2	19.3	15.1	17.7	15.6	15.1	15.1	14.2	14.2	12.9	34
36	20.0	15.3	17.9	14.2	16.9	14.7	14.3	14.3	13.5	13.6	12.2	36
38	18.5	14.5	16.7	13.3	15.8	13.8	13.4	13.5	12.8	12.8	11.6	38
40	17.4	13.7	15.6	12.7	14.8	13.1	12.7	12.7	12.2	12.2	10.9	40
42	16.4	13.0	14.8	11.9	14.0	12.2	12.1	12.0	11.5	11.5	10.3	42
44	15.3	12.3	13.8	11.2	13.1	11.6	11.4	11.4	10.9	10.9	9.7	44
46	14.4	11.9	13.2	10.7	12.5	10.8	10.6	10.6	10.3	10.3	9.2	46
48	13.7	10.9	12.0	10.1	11.8	10.1	10.1	10.0	9.6	9.6	8.7	48
50	12.9	10.6	10.9	9.7	11.1	9.3	9.4	9.3	9.0	9.0	8.2	50
52	12.1	10.0	9.5	9.1	10.4	8.7	8.7	8.8	8.5	8.5	7.7	52
54	11.5	9.7	8.9	8.8	9.9	8.2	8.2	8.1	7.9	7.8	7.1	54
56	10.9	9.4	8.5	8.4	9.3	7.6	7.6	7.6	7.4	7.4	6.8	56
58	10.2	8.8	8.0	7.9	8.8	7.0	7.1	7.2	6.9	6.8	6.2	58
60		8.5	7.4	7.8	8.5	6.5	6.6	6.5	6.4	6.4	5.8	60
62		7.8	7.1	7.3	7.9	6.0	6.1	6.1	5.9	5.8	5.5	62
64		7.0	5.8	6.8	7.7	5.6	5.6	5.6	5.4	5.4	5.1	64
66				6.5	7.4	5.2	5.3	5.2	5.0	4.9	4.7	66
68				6.2	7.0	4.8	4.9	4.9	4.7	4.6	4.4	68
70				5.8	6.0	4.4	4.6	4.6	4.3	4.3	4.1	70
72						4.1	4.2	4.2	4.0	4.0	3.8	72
74						3.8	3.9	3.9	3.7	3.7	3.5	74
76							3.6	3.6	3.0	3.0	3.0	76
78									1.9	1.9	2.8	78
80											2.0	80
组合 Code	222111	112222	222211	122222	222221	222222	222233	332222	223333	333322	333333	组合 Code
倍率 n	4	3	3	3	3	2	2	2	2	2	2	倍率 n

起升高度曲线图 Lifting height chart



主臂+超起
Boom+ Super lifting device



起重性能表

Rated lifting load table



T 37.2~85m

      									
	37.2	42.5	42.5	47.8	53.1	53.1	58.4	58.4	m
6	159.0								6
7	157.7	136.5	136.5						7
8	144.0	136.5	136.5	125.0	101.0	101.0			8
9	136.0	129.2	127.3	125.0	101.0	101.0			9
10	119.7	118.8	116.9	115.9	101.0	101.0	89.5	89.5	10
12	102.6	101.8	99.8	102.8	98.8	97.9	89.5	89.5	12
14	88.6	90.4	86.5	90.9	86.5	84.6	84.5	83.6	14
16	77.9	78.6	76.0	78.3	76.0	75.1	76.0	73.2	16
18	68.4	69.4	67.5	68.8	68.4	66.5	67.5	65.6	18
20	59.9	61.8	58.9	60.8	60.8	59.9	60.8	58.9	20
22	53.0	54.8	52.3	54.2	55.1	53.2	55.1	53.2	22
24	47.5	49.3	46.6	48.5	49.4	47.5	53.0	50.0	24
26	42.8	44.5	41.8	42.8	44.7	42.8	48.0	45.0	26
28	38.8	40.4	37.1	39.0	39.9	39.0	43.0	40.0	28
30	35.0	36.9	33.3	35.2	37.1	35.2	39.0	36.0	30
32	32.0	33.7	30.4	32.3	33.3	31.4	36.0	33.0	32
34		31.0	27.6	29.5	30.4	28.5	33.0	30.0	34
36		28.0	24.7	27.0	27.6	25.7	30.0	27.0	36
38		23.3	19.4	24.8	25.7	23.8	28.0	25.0	38
40				22.7	23.8	21.9	26.0	23.0	40
42				20.8	21.9	19.8	24.0	21.0	42
44					19.9	17.8	22.0	18.9	44
46					18.1	15.9	20.0	17.0	46
48							18.5	15.3	48
50							16.9	13.6	50
52							15.3	12.1	52
组合 Code	011110	011111	111110	111111	111112	211111	111122	221111	组合 Code
倍率 n	13	11	11	10	8	8	7	7	倍率 n

起重性能表

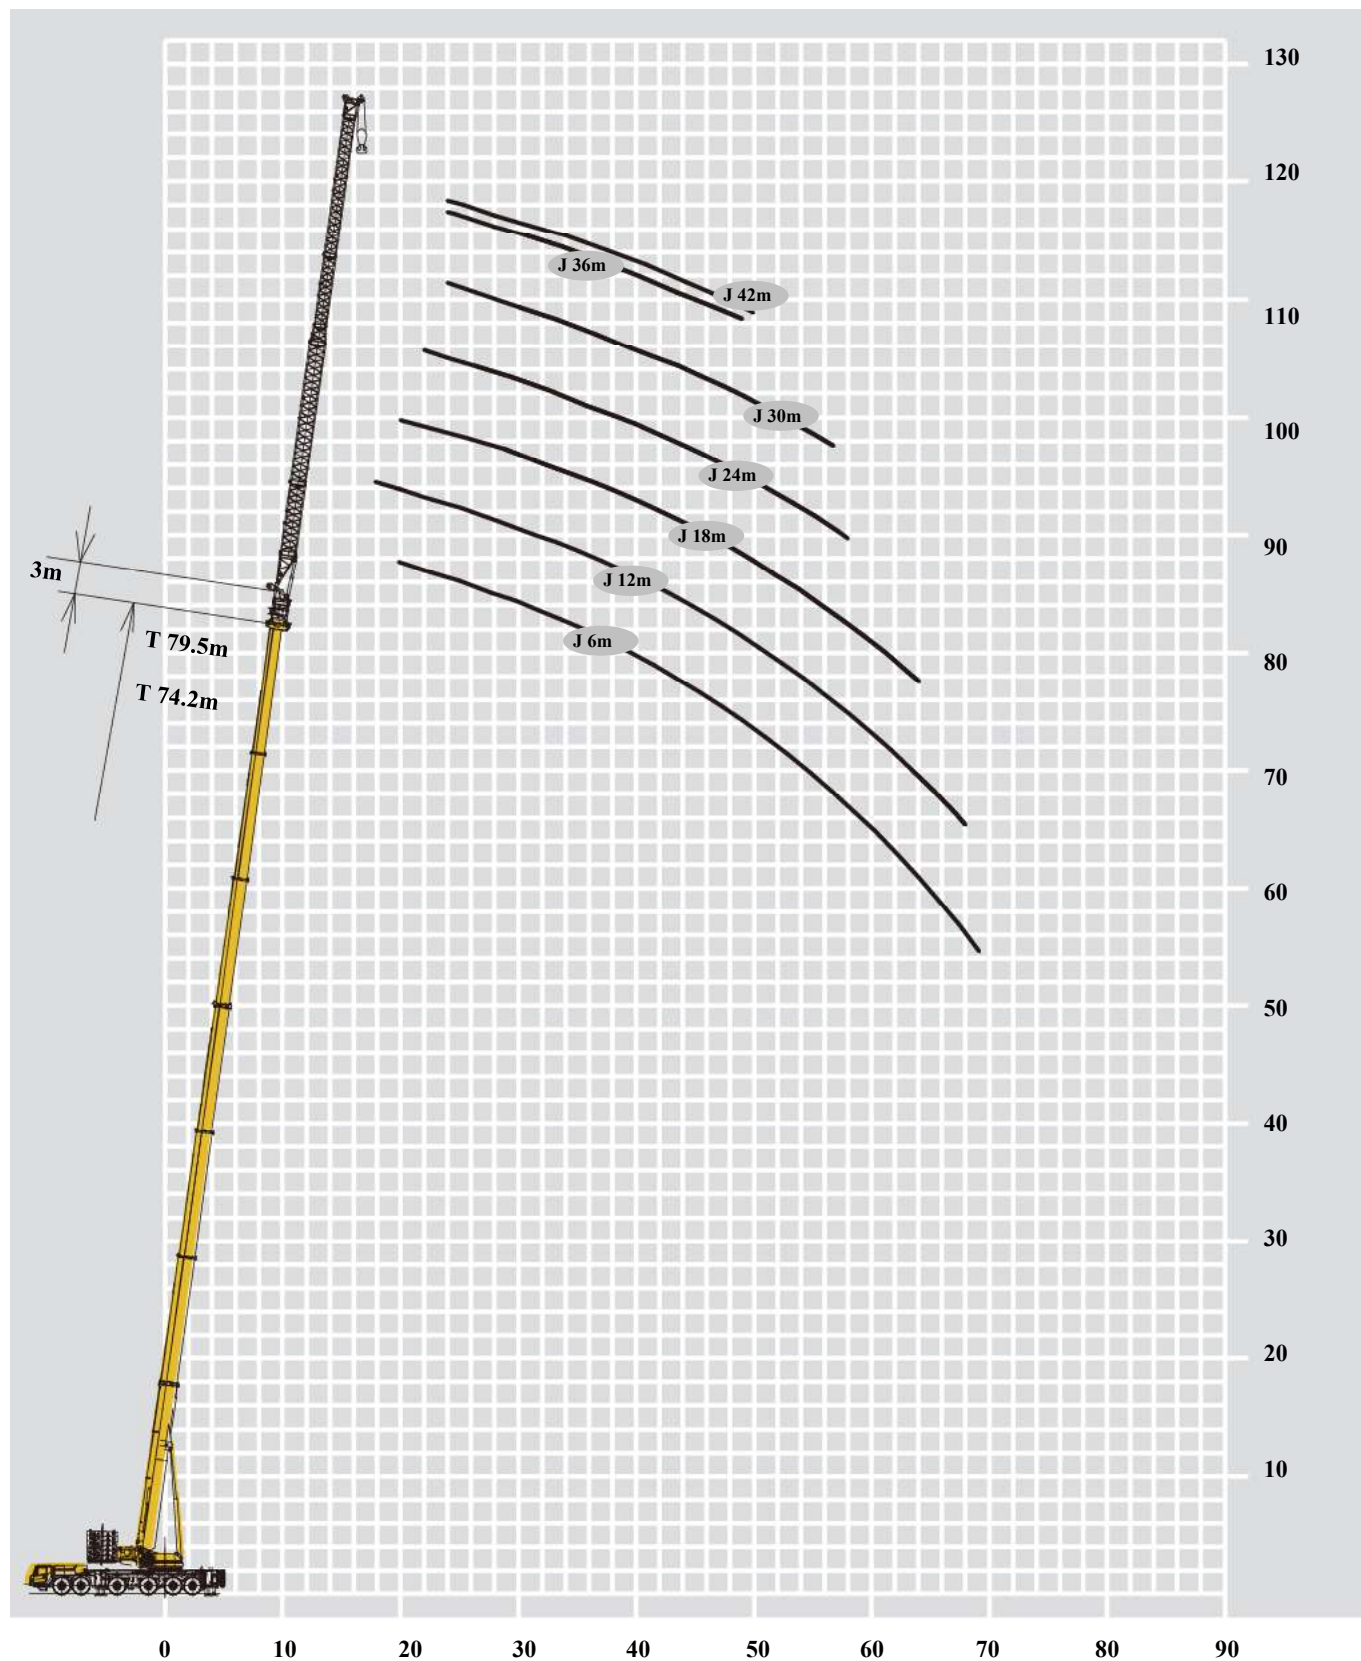
Rated lifting load table

T 37.2~85m

										
		63.6	63.6	68.9	68.9	74.2	74.2	79.5	85	m
12	85.6	89.0								12
14	78.2	81.9	72.9	75.7	64.9	64.9				14
16	70.8	73.2	67.0	69.0	62.7	63.8	59.3	52.0		16
18	65.2	64.6	61.3	63.1	57.8	58.7	54.8	50.1		18
20	60.5	58.0	56.4	58.0	53.9	54.5	51.1	47.2		20
22	55.1	52.3	52.5	52.3	50.1	50.7	47.4	44.1		22
24	49.4	47.5	49.1	47.5	46.5	46.9	44.2	41.2		24
26	45.6	42.8	44.7	42.8	43.4	42.8	41.4	37.1		26
28	41.8	38.0	43.0	38.0	39.9	38.0	38.0	34.2		28
30	39.0	36.0	38.0	36.0	35.2	34.2	36.0	32.1		30
32	36.0	33.0	35.0	33.0	32.3	31.4	33.0	30.6		32
34	33.0	30.0	32.0	30.0	30.4	28.5	31.0	28.5		34
36	30.0	27.0	30.0	28.0	27.6	26.6	28.0	26.6		36
38	28.0	25.0	28.0	25.0	25.7	24.7	26.0	24.7		38
40	26.0	23.0	26.0	23.0	23.8	22.8	24.0	24.0		40
42	24.0	21.0	24.0	22.0	21.9	20.9	22.0	22.0		42
44	22.0	19.0	22.0	20.0	20.9	19.0	21.0	21.0		44
46	20.9	17.6	21.0	18.0	19.0	18.1	19.0	19.0		46
48	19.0	15.8	19.0	16.6	18.1	16.2	18.0	18.0		48
50	17.5	14.2	17.7	15.0	16.2	15.2	16.9	17.0		50
52	16.1	12.8	16.3	13.5	15.2	13.8	15.0	15.0		52
54	14.7	11.4	14.9	12.2	14.0	12.5	14.0	14.0		54
56	13.4	10.1	13.7	10.9	12.8	11.3	12.9	13.0		56
58			12.5	9.8	11.7	10.2	11.8	12.0		58
60			11.4	8.7	10.7	9.2	10.7	10.9		60
62			10.4	7.7	9.7	8.2	9.7	9.9		62
64					8.8	7.3	8.7	9.0		64
66					8.0	6.5	7.9	8.1		66
68							7.0	7.3		68
70							6.3	6.5		70
72							5.5	5.8		72
74								5.1		74
76								4.5		76
78								3.8		78
组合 Code	111222	222111	112222	222211	122222	222221	222222	333333	组合 Code	
倍率 n	7	7	6	6	5	5	5	4	倍率 n	

起升高度曲线图 Lifting height chart





主臂+副臂
Boom + Jib



起重性能表

Rated lifting load table





T 16.1~74.2m

16.1-74.2 m 3 m 42 m 9.4×9.6m 360° 143 t							
	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	
	0°						
	42 m						
10	16.2						10
12	13.8						12
14	12.0						14
16	11.0						16
18	9.9	10.4					18
20	8.8	10.4	9.2				20
22	7.9	9.9	9.2	8.3	7.0		22
24	7.3	9.5	9.2	8.3	7.0	4.9	24
26	6.6	9.1	8.9	8.3	7.0	4.9	26
28	6.1	8.8	8.5	8.1	7.0	4.9	28
30	5.6	8.4	8.2	7.8	7.0	4.9	30
32	5.2	8.1	7.9	7.5	6.9	4.9	32
34	4.8	7.6	7.5	7.3	6.7	4.9	34
36	4.4	7.3	7.3	7.0	6.2	4.9	36
38	4.2	6.9	7.0	6.7	5.6	4.4	38
40	3.9	6.5	6.7	6.3	5.1	4.0	40
42	3.7	6.1	6.4	5.9	4.6	3.6	42
44	3.4	5.8	6.1	5.2	4.2	3.2	44
46	3.1	5.6	5.9	4.8	3.8	2.9	46
48	3.0	5.4	5.6	4.4	3.3	2.6	48
50	2.8	5.1	5.3	4.0	3.0	2.2	50
52	2.6	4.9	4.9	3.6	2.7		52
54	2.5	4.7	4.6	3.4	2.4		54
56	2.4	4.5	4.2	3.0	2.1		56
58		4.2	4.0	2.8			58
60		4.1	3.6	2.5			60
62		3.9	3.3	2.3			62
64		3.7	3.1	2.0			64
66		3.6	2.9				66
68		3.4	2.6				68
70		3.3	2.3				70
72		3.1	2.1				72
74		3.0					74
76		2.9					76
78		2.6					78
80		2.5					80
82		2.4					82
84		2.1					84
组合 Code	000000	211111	221111	222111	222211	222221	组合 Code
倍率 n	2	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table


T 16.1~79.5m

       								
	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m	
	0°							
	36 m							
9	19.7							9
10	18.6							10
12	15.9							12
14	13.9							14
16	12.2	12.6						16
18	11.0	12.6	11.7					18
20	10.3	12.1	11.7	10.2	8.4			20
22	9.4	11.7	11.2	10.2	8.4	6.1		22
24	8.5	11.1	10.8	10.2	8.4	6.1	4.2	24
26	7.8	10.8	10.5	9.9	8.4	6.1	4.2	26
28	7.2	10.4	10.1	9.6	8.4	6.1	4.2	28
30	6.6	9.8	9.7	9.2	8.3	6.0	4.2	30
32	6.2	9.3	9.4	9.0	7.8	6.0	4.2	32
34	5.7	8.9	9.0	8.6	7.2	5.9	4.2	34
36	5.3	8.5	8.5	7.9	6.6	5.4	4.1	36
38	5.0	8.0	8.2	7.3	5.9	4.9	4.0	38
40	4.7	7.6	7.8	6.6	5.3	4.5	3.7	40
42	4.4	7.2	7.4	6.1	4.9	4.1	3.2	42
44	4.2	6.8	7.0	5.7	4.5	3.7	2.9	44
46	3.9	6.5	6.7	5.1	4.1	3.3	2.6	46
48	3.7	6.2	6.3	4.7	3.7	2.9	2.3	48
50	3.5	6.0	5.7	4.4	3.3	2.6		50
52		5.7	5.3	4.0	3.1	2.4		52
54		5.4	5.1	3.6	2.7	2.1		54
56		5.2	4.6	3.4	2.5			56
58		5.0	4.3	3.1	2.2			58
60		4.8	3.9	2.8	2.0			60
62		4.6	3.7	2.4				62
64		4.4	3.4	2.2				64
66		4.1	3.2	2.0				66
68		4.0	2.9					68
70		3.9	2.7					70
72		3.7	2.4					72
74		3.4	2.2					74
76		3.2	2.0					76
78		3.1						78
80		2.9						80
82		2.6						82
84		2.4						84
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	2	1	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table

T 16.1~79.5m




	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m	
	0°							
	30 m							
8	23.2							8
9	21.4							9
10	20.1							10
12	17.3							12
14	15.1							14
16	13.4	15.3						16
18	12.0	15.3	14.0	12.7				18
20	10.9	14.6	14.0	12.7	10.1			20
22	10.2	14.0	13.5	12.7	10.1	7.5		22
24	9.4	13.4	13.0	12.2	10.1	7.5	5.4	24
26	8.6	12.7	12.5	11.9	10.1	7.5	5.4	26
28	7.9	11.9	12.0	11.6	9.8	7.5	5.4	28
30	7.4	11.2	11.5	10.9	9.1	7.4	5.4	30
32	6.9	10.6	10.9	10.1	8.3	7.2	5.4	32
34	6.5	10.0	10.3	9.3	7.7	6.4	5.3	34
36	6.0	9.5	9.7	8.5	7.1	5.9	5.1	36
38	5.6	9.1	9.3	7.9	6.4	5.3	4.6	38
40	5.3	8.6	8.9	7.3	5.8	4.9	4.2	40
42	5.0	8.2	8.3	6.7	5.4	4.5	3.8	42
44	4.8	7.8	7.8	6.2	5.0	4.1	3.4	44
46		7.5	7.3	5.6	4.6	3.7	3.1	46
48		7.1	6.7	5.2	4.1	3.4	2.9	48
50		6.9	6.2	4.8	3.7	3.0	2.5	50
52		6.6	5.8	4.5	3.5	2.8	2.3	52
54		6.4	5.4	4.2	3.1	2.5	2.1	54
56		6.1	5.1	3.8	2.9	2.3		56
58		5.8	4.7	3.6	2.7	2.1		58
60		5.6	4.3	3.2	2.2			60
62		5.4	4.1	2.9	2.0			62
64		5.2	3.8	2.7				64
66		5.0	3.5	2.5				66
68		4.7	3.2	2.3				68
70		4.3	3.0	2.1				70
72		4.1	2.6					72
74		3.9	2.3					74
76		3.6	2.0					76
78		3.4						78
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	2	2	2	1	1	1	1	倍率 n

起重性能表

Rated lifting load table

T 16.1~79.5m




	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m	
	0°							
	24m							
7	30.9							7
8	28.1							8
9	25.9							9
10	23.9							10
12	20.9							12
14	18.5							14
16	16.4	19.5						16
18	14.7	18.5	17.7	16.0	12.4			18
20	13.2	17.4	16.9	16.0	12.4	8.9		20
22	12.1	16.4	16.0	15.3	12.4	8.9	6.6	22
24	11.2	15.5	15.3	14.7	12.3	8.9	6.6	24
26	10.6	14.5	14.6	13.7	11.9	8.9	6.6	26
28	10.0	13.7	13.9	12.5	10.7	8.9	6.6	28
30	9.3	13.0	13.1	11.6	9.7	8.2	6.5	30
32	8.7	12.3	12.4	10.6	9.0	7.6	6.5	32
34	8.2	11.6	11.9	9.8	8.2	6.8	5.9	34
36	7.7	11.1	10.8	8.9	7.5	6.3	5.5	36
38	7.2	10.6	10.1	8.3	6.9	5.8	5.1	38
40		10.1	9.4	7.7	6.4	5.4	4.6	40
42		9.6	8.8	7.0	5.9	4.9	4.2	42
44		9.0	8.2	6.6	5.5	4.5	3.8	44
46		8.8	7.7	6.2	5.0	4.0	3.5	46
48		8.4	7.2	5.6	4.6	3.8	3.2	48
50		8.0	6.7	5.2	4.2	3.4	3.0	50
52		7.7	6.2	4.8	3.9	3.2	2.6	52
54		7.4	5.7	4.5	3.6	2.8	2.4	54
56		7.1	5.5	4.2	3.3	2.6	2.2	56
58		6.8	5.1	3.9	3.0	2.4	2.0	58
60		6.5	4.9	3.5	2.8	2.2		60
62		6.0	4.4	3.3	2.6	2.0		62
64		5.7	4.2	3.1	2.3			64
66		5.5	4.0	2.9	2.1			66
68		5.0	3.7	2.7				68
70		4.8	3.1	2.4				70
72		4.6	2.8	2.1				72
74			2.4					74
76			2.1					76
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	3	2	2	2	1	1	1	倍率 n

起重性能表

Rated lifting load table

T 16.1~79.5m




								
	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m	
	0°							
	18 m							
6	39.4							6
7	35.5							7
8	32.3							8
9	29.9							9
10	27.5							10
12	24.0							12
14	21.4	25.0						14
16	19.4	23.6	22.5					16
18	17.4	22.2	21.3	18.7	14.8	11.3		18
20	15.8	20.7	20.1	18.7	14.8	11.3	8.1	20
22	14.6	19.4	19.1	17.5	14.8	11.3	8.1	22
24	13.3	18.2	18.1	15.9	13.7	11.3	8.1	24
26	12.4	17.0	17.3	14.4	12.5	10.8	8.1	26
28	11.6	16.3	16.0	13.2	11.2	9.8	8.1	28
30	10.9	15.3	14.7	12.1	10.5	8.9	7.6	30
32	10.5	14.5	13.4	11.3	9.4	8.2	7.1	32
34	10.1	13.9	12.6	10.3	8.8	7.6	6.5	34
36		13.1	11.7	9.5	8.0	7.0	6.1	36
38		12.6	10.9	8.8	7.4	6.4	5.5	38
40		12.0	10.1	8.2	6.8	5.9	5.1	40
42		11.4	9.4	7.7	6.4	5.5	4.7	42
44		11.0	9.0	7.1	6.0	5.1	4.3	44
46		10.4	8.2	6.6	5.4	4.7	4.0	46
48		9.8	7.8	6.2	5.0	4.3	3.7	48
50		9.3	7.3	5.8	4.8	4.0	3.4	50
52		8.8	6.9	5.4	4.3	3.6	3.1	52
54		8.4	6.5	4.9	4.0	3.5	2.9	54
56		7.9	6.1	4.7	3.7	3.2	2.7	56
58		7.5	5.6	4.3	3.5	2.9	2.5	58
60		7.0	5.3	4.1	3.1	2.7	2.3	60
62		6.6	4.9	3.6	2.9	2.5	2.1	62
64		6.3	4.6	3.4	2.7	2.3		64
66		5.9	4.4	3.2	2.5	2.1		66
68			3.8	3.0	2.2			68
70			3.3	2.8	2.0			70
72			2.8	2.2				72
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	3	2	2	2	2	1	1	倍率 n

起重性能表

Rated lifting load table

T 16.1~79.5m



	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m	
	0°							
	12 m							
5	58.9							5
6	53.5							6
7	49.6							7
8	45.6							8
9	41.7							9
10	38.6							10
12	33.8							12
14	30.0	32.1						14
16	26.7	28.7	27.7	22.8	17.1			16
18	24.0	26.8	26.2	22.8	17.1	13.4	9.7	18
20	21.9	25.1	24.3	20.6	17.1	13.4	9.7	20
22	20.2	23.6	22.0	18.7	16.0	13.4	9.7	22
24	18.9	22.2	20.1	17.1	14.5	12.7	9.7	24
26	17.5	21.0	18.4	15.5	13.2	11.5	9.7	26
28	16.3	19.8	16.9	14.3	12.1	10.5	9.3	28
30		18.7	15.7	13.0	11.1	9.7	8.5	30
32		17.5	14.5	12.2	10.2	8.9	7.8	32
34		16.3	13.4	11.2	9.4	8.1	7.2	34
36		15.3	12.6	10.4	8.7	7.5	6.7	36
38		14.1	11.8	9.5	7.9	6.9	6.2	38
40		13.2	10.9	8.9	7.4	6.5	5.7	40
42		12.4	10.2	8.3	6.8	5.9	5.3	42
44		12.0	9.6	7.7	6.3	5.5	4.9	44
46		11.1	8.9	7.3	5.9	5.1	4.6	46
48		10.7	8.4	6.7	5.5	4.9	4.2	48
50		9.9	8.0	6.2	5.1	4.5	4.0	50
52		9.4	7.4	5.8	4.7	4.1	3.6	52
54		9.0	6.9	5.5	4.4	3.9	3.4	54
56		8.5	6.5	5.2	4.2	3.6	3.2	56
58		8.1	5.8	4.8	3.8	3.2	3.0	58
60		7.6	5.4	4.3	3.6	3.0	2.8	60
62		7.1	4.8	3.8	3.2	2.8	2.6	62
64			4.4	3.4	2.9	2.5	2.4	64
66			4.0	3.1	2.5	2.3	2.2	66
68				2.7	2.2	2.0	2.0	68
70				2.4				70
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	5	3	3	2	2	1	1	倍率 n

起重性能表

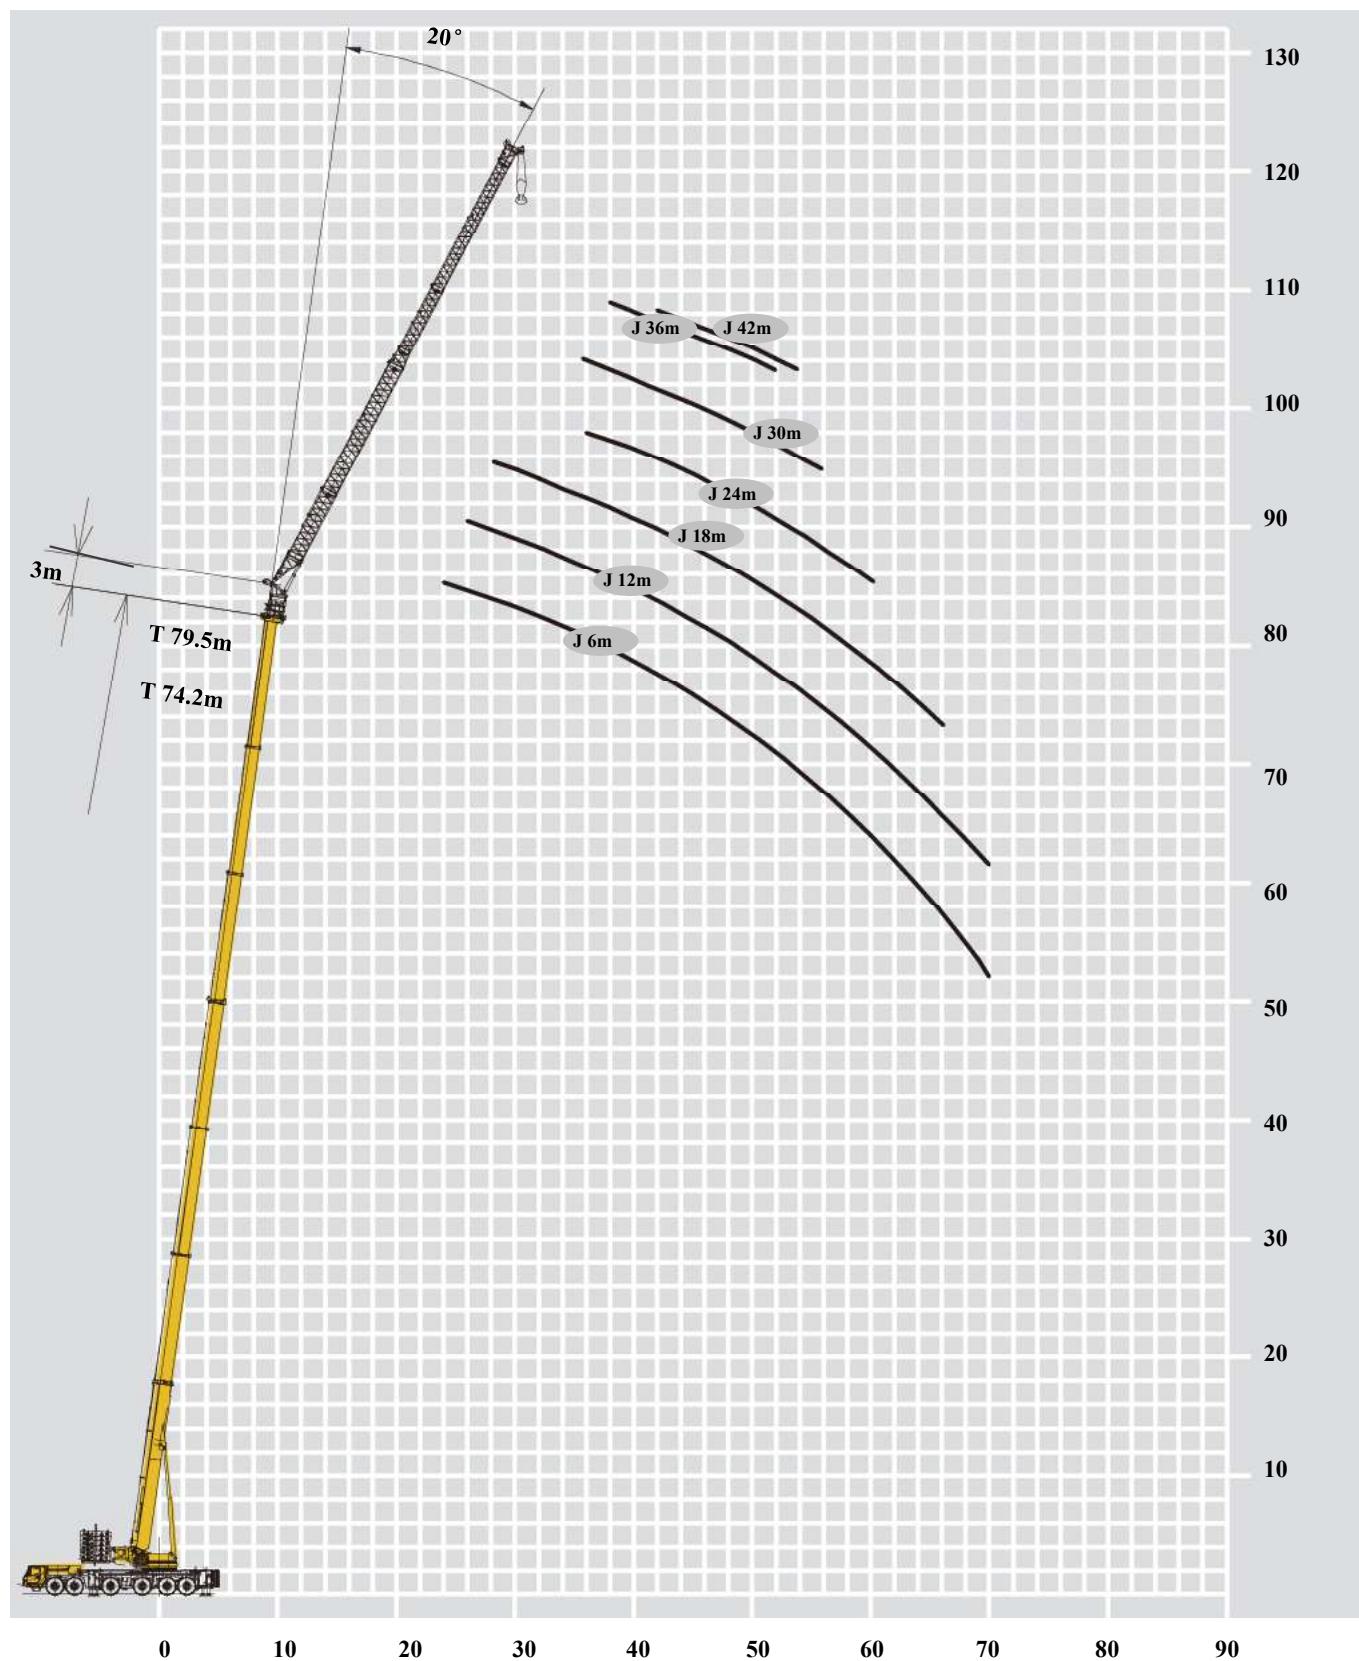
Rated lifting load table

T 16.1~79.5m

16.1-79.5 m T 3 m V 6m F 9.4×9.6m 360° 143 t																
m	16.1+3 m		53.1+3 m		58.4+3 m		63.6+3 m		68.9+3 m		74.2+3 m		79.5+3 m		m	
	0°															
	6 m															
3	74.0													3		
3.5	72.5													3.5		
4	70.9													4		
4.5	69.6													4.5		
5	68.6													5		
6	64.5													6		
7	59.2													7		
8	53.5													8		
9	48.9													9		
10	44.8													10		
12	38.7		44.4											12		
14	34.1		40.9		36.7									14		
16	30.5		38.0		32.4		26.9							16		
18	27.2		34.4		29.0		24.7		21.5					18		
20	24.6		31.1		26.0		22.4		19.2		16.2		12.7	20		
22	22.9		28.3		23.5		20.1		17.1		15.2		12.7	22		
24			25.9		21.7		18.2		15.5		13.8		12.2	24		
26			23.8		19.8		16.8		14.4		12.7		11.2	26		
28			21.8		18.0		15.4		13.2		11.7		10.0	28		
30			20.2		16.7		14.1		11.9		10.7		9.2	30		
32			19.0		15.5		13.1		11.1		9.7		8.7	32		
34			17.8		14.6		12.1		10.3		9.0		7.9	34		
36			16.5		13.4		11.3		9.5		8.4		7.5	36		
38			15.4		12.5		10.4		8.7		7.8		6.9	38		
40			14.5		11.7		9.6		8.3		7.3		6.5	40		
42			13.7		10.9		9.0		7.5		6.8		6.1	42		
44			12.8		10.4		8.5		7.1		6.3		5.7	44		
46			12.2		9.6		8.0		6.7		5.8		5.3	46		
48			11.5		9.2		7.4		6.3		5.4		4.9	48		
50			10.9		8.7		6.9		5.8		5.1		4.7	50		
52			10.5		8.1		6.5		5.4		4.8		4.2	52		
54			9.6		7.7		6.1		5.0		4.5		4.0	54		
56			9.2		6.8		5.6		4.8		4.2		3.8	56		
58					6.0		5.1		4.4		3.9		3.6	58		
60					5.4		4.4		3.9		3.7		3.4	60		
62							3.9		3.5		3.2		3.2	62		
64							3.4		2.9		2.8		2.8	64		
66							3.0		2.6		2.5		2.5	66		
68									2.3		2.1		2.0	68		
组合 Code	000000		211111		221111		222111		222211		222221		222222	组合 Code		
倍率 n	6		4		3		3		2		2		1	倍率 n		

起升高度曲线图 Lifting height chart




主臂+副臂
Boom + Jib



起重性能表

Rated lifting load table




T 16.1~74.2m

 16.1-79.5 m 3 m 42 m 9.4×9.6m 360° 143 t 									
		16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m		
		20°							
		42 m							
24	5.4							24	
26	5.0							26	
28	4.7							28	
30	4.3							30	
32	4.1	4.7						32	
34	3.8	4.7	4.6					34	
36	3.6	4.5	4.6					36	
38	3.3	4.3	4.4	4.5				38	
40	3.1	4.2	4.3	4.4	4.3			40	
42	2.9	4.0	4.1	4.2	4.3	3.1		42	
44	2.8	3.9	4.0	4.1	4.1	3.1		44	
46	2.6	3.7	3.8	3.9	3.9	3.1		46	
48	2.5	3.6	3.7	3.8	3.8	2.9		48	
50	2.4	3.5	3.6	3.7	3.4	2.6		50	
52	2.3	3.4	3.5	3.6	3.1	2.3		52	
54	2.2	3.3	3.4	3.5	2.8	2.1		54	
56	2.1	3.2	3.3	3.4	2.6			56	
58		3.1	3.2	3.2	2.4			58	
60		3.0	3.1	3.0	2.2			60	
62		2.9	3.0	2.7				62	
64		2.8	2.9	2.4				64	
66		2.7	2.8	2.2				66	
68		2.7	2.8	2.0				68	
70		2.6	2.6					70	
72		2.6	2.4					72	
74		2.5	2.3					74	
76		2.4	2.0					76	
78		2.4						78	
80		2.3						80	
82		2.3						82	
84		2.2						84	
86		2.0						86	
组合 Code	000000	211111	221111	222111	222211	222221		组合 Code	
倍率 n	1	1	1	1	1	1		倍率 n	

起重性能表

Rated lifting load table





T 16.1~79.5m

     								
	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m	
	20°							
	36 m							
20	7.6							20
22	7.0							22
24	6.4							24
26	6.0							26
28	5.6	6.5						28
30	5.2	6.5	6.3					30
32	5.0	6.2	6.3					32
34	4.7	6.0	6.1	6.0	5.8			34
36	4.4	5.8	5.9	6.0	5.8	4.2		36
38	4.2	5.5	5.7	5.8	5.8	4.2	2.8	38
40	4.0	5.3	5.5	5.6	5.5	4.2	2.8	40
42	3.7	5.1	5.3	5.5	5.1	4.2	2.8	42
44	3.5	5.0	5.2	5.3	4.7	3.8	2.8	44
46	3.4	4.8	5.0	5.1	4.4	3.6	2.8	46
48	3.3	4.7	4.9	5.0	4.0	3.1	2.5	48
50	3.1	4.5	4.7	4.6	3.7	3.0	2.3	50
52		4.4	4.6	4.4	3.4	2.8	2.0	52
54		4.3	4.5	4.0	3.1	2.4		54
56		4.2	4.4	3.8	2.9	2.2		56
58		4.1	4.3	3.5	2.6	2.0		58
60		4.0	4.2	3.3	2.4			60
62		3.9	4.0	3.0	2.2			62
64		3.8	3.8	2.7				64
66		3.7	3.6	2.5				66
68		3.6	3.3	2.3				68
70		3.5	3.1	2.1				70
72		3.4	2.9					72
74		3.3	2.6					74
76		3.2	2.4					76
78		3.1	2.2					78
80		3.0						80
82		2.7						82
84		2.4						84
86		2.0						86
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	1	1	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table






T 16.1~79.5m

  16.1-79.5 m T  3 m V  30 m F  9.4×9.6m  360°  143 t 								
	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m	
	20°							
	30 m							
18	9.1							18
20	8.3							20
22	7.7							22
24	7.2							24
26	6.8	7.9						26
28	6.3	7.9	7.8					28
30	5.9	7.6	7.8	7.7				30
32	5.6	7.4	7.6	7.7	6.9			32
34	5.4	7.2	7.3	7.5	6.9	5.4		34
36	5.0	6.9	7.1	7.4	6.9	5.4	4.2	36
38	4.8	6.7	6.9	7.1	6.5	5.4	4.2	38
40	4.6	6.5	6.7	6.9	5.9	5.0	4.2	40
42	4.4	6.3	6.5	6.7	5.5	4.6	3.9	42
44	4.2	6.1	6.3	6.4	5.1	4.2	3.6	44
46		5.9	6.1	6.0	4.7	3.9	3.3	46
48		5.8	6.0	5.5	4.4	3.6	3.0	48
50		5.6	5.9	5.1	4.1	3.4	2.8	50
52		5.5	5.7	4.8	3.8	3.1	2.6	52
54		5.4	5.5	4.4	3.5	2.8	2.4	54
56		5.2	5.3	4.2	3.2	2.6	2.2	56
58		5.2	5.0	3.9	3.0	2.4	2.0	58
60		5.0	4.7	3.7	2.7	2.2		60
62		4.9	4.5	3.4	2.5	2.0		62
64		4.7	4.1	3.1	2.3			64
66		4.5	3.8	2.9	2.1			66
68		4.4	3.6	2.7				68
70		4.0	3.4	2.5				70
72		3.6	3.0	2.3				72
74		3.3	2.6	2.0				74
76		2.9	2.3					76
78		2.5	2.1					78
80		2.1						80
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	1	1	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table




T 16.1~79.5m

       								
	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m	
	20°							
	24 m							
14	12.6							14
16	11.6							16
18	10.9							18
20	10.4							20
22	9.7							22
24	9.1	11.1						24
26	8.6	10.9	10.9	10.6				26
28	8.1	10.7	10.8	10.6	9.4			28
30	7.6	10.4	10.4	10.2	9.4	6.7		30
32	7.2	10.0	9.9	9.9	8.7	6.7	5.4	32
34	7.0	9.6	9.5	9.5	8.1	6.7	5.4	34
36	6.7	9.2	9.2	9.0	7.5	6.3	5.4	36
38	6.4	8.8	8.8	8.3	7.0	5.8	5.0	38
40		8.4	8.6	7.7	6.4	5.4	4.6	40
42		8.2	8.2	7.3	6.0	5.0	4.2	42
44		7.8	8.0	6.7	5.5	4.6	3.9	44
46		7.6	7.7	6.3	5.1	4.3	3.7	46
48		7.4	7.3	5.8	4.9	4.0	3.5	48
50		7.2	6.8	5.5	4.5	3.7	3.2	50
52		6.9	6.4	5.2	4.3	3.5	2.9	52
54		6.7	6.2	4.9	3.9	3.2	2.7	54
56		6.5	5.7	4.6	3.6	3.0	2.5	56
58		6.3	5.3	4.3	3.4	2.8	2.3	58
60		6.1	5.1	4.0	3.1	2.6	2.1	60
62		5.9	4.8	3.7	2.9	2.4		62
64		5.8	4.5	3.4	2.7	2.1		64
66		5.5	4.2	3.2	2.5			66
68		5.2	3.8	3.0	2.2			68
70		4.8	3.4	2.6	2.0			70
72		4.5	3.1	2.2				72
74		4.1	2.7	2.0				74
76			2.3					76
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	1	1	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table






T 16.1~79.5m

       								
	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m	
	20°							
	18 m							
12	16.2							12
14	15.0							14
16	13.8							16
18	12.8							18
20	12.0	15.5						20
22	11.2	14.8	15.1					22
24	10.9	14.4	14.4	13.8	11.9			24
26	10.6	13.8	13.7	13.5	11.9	8.8		26
28	10.2	13.3	13.2	12.8	11.1	8.8	6.8	28
30	9.7	12.7	12.7	11.9	10.1	8.8	6.8	30
32	9.3	12.1	12.2	11.1	9.3	8.1	6.8	32
34		11.7	11.7	10.3	8.7	7.5	6.4	34
36		11.3	11.4	9.6	8.1	7.0	5.9	36
38		10.7	10.9	9.0	7.5	6.5	5.5	38
40		10.3	10.1	8.3	7.0	6.1	5.1	40
42		10.0	9.7	7.9	6.5	5.7	4.8	42
44		9.7	9.0	7.3	6.0	5.3	4.6	44
46		9.4	8.4	6.8	5.6	4.9	4.2	46
48		9.0	8.0	6.4	5.3	4.6	4.0	48
50		8.8	7.6	6.0	5.0	4.3	3.7	50
52		8.5	7.2	5.6	4.7	4.0	3.5	52
54		8.3	6.7	5.3	4.4	3.7	3.3	54
56		8.0	6.3	4.9	4.1	3.5	2.9	56
58		7.7	6.0	4.7	3.8	3.3	2.7	58
60		7.3	5.6	4.5	3.5	3.1	2.5	60
62		6.7	5.4	4.1	3.2	2.9	2.3	62
64		6.1	4.7	3.9	3.0	2.6	2.2	64
66		5.6	4.2	3.4	2.8	2.4	2.0	66
68		5.2	3.8	3.0	2.5	2.2		68
70			3.4	2.7	2.1	2.1		70
72			3.0	2.3				72
74								74
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	2	2	2	2	1	1	1	倍率 n

起重性能表

Rated lifting load table






T 16.1~79.5m

       								
	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m	
	20°							
	12 m							
8	29.4							8
9	27.8							9
10	26.4							10
12	23.9							12
14	22.1							14
16	21.1	22.8						16
18	19.7	21.6	21.1					18
20	18.7	20.5	20.2					20
22	17.6	19.3	19.3	18.0	14.0			22
24	17.0	18.4	18.5	16.4	14.0	11.1		24
26	16.2	17.7	17.8	15.2	12.8	11.1	9.0	26
28		16.9	16.3	13.9	11.8	10.2	9.0	28
30		16.1	15.3	12.9	10.9	9.4	8.3	30
32		15.4	14.3	12.1	10.1	8.8	7.8	32
34		14.9	13.2	11.3	9.3	8.2	7.1	34
36		14.4	12.4	10.5	8.6	7.6	6.7	36
38		13.8	11.5	9.7	8.2	7.0	6.3	38
40		13.3	11.0	9.1	7.6	6.6	5.9	40
42		12.6	10.3	8.7	7.2	6.2	5.5	42
44		12.0	9.7	8.1	6.6	5.8	5.1	44
46		11.5	9.1	7.6	6.1	5.4	4.8	46
48		10.7	8.7	7.0	5.7	5.1	4.5	48
50		10.3	8.3	6.6	5.5	4.8	4.2	50
52		9.9	7.6	6.2	5.1	4.4	4.0	52
54		9.4	7.2	5.8	4.8	4.2	3.8	54
56		9.0	6.8	5.5	4.4	3.8	3.6	56
58		8.2	6.5	5.2	4.2	3.6	3.4	58
60		7.4	5.8	4.8	4.0	3.4	3.2	60
62		6.7	5.1	4.6	3.8	3.2	2.9	62
64			4.5	4.0	3.6	3.0	2.7	64
66			4.0	3.4	3.1	2.7	2.5	66
68				2.9	2.6	2.4	2.4	68
70				2.4	2.1	2.0	2.0	70
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	3	2	2	2	2	1	1	倍率 n

起重性能表

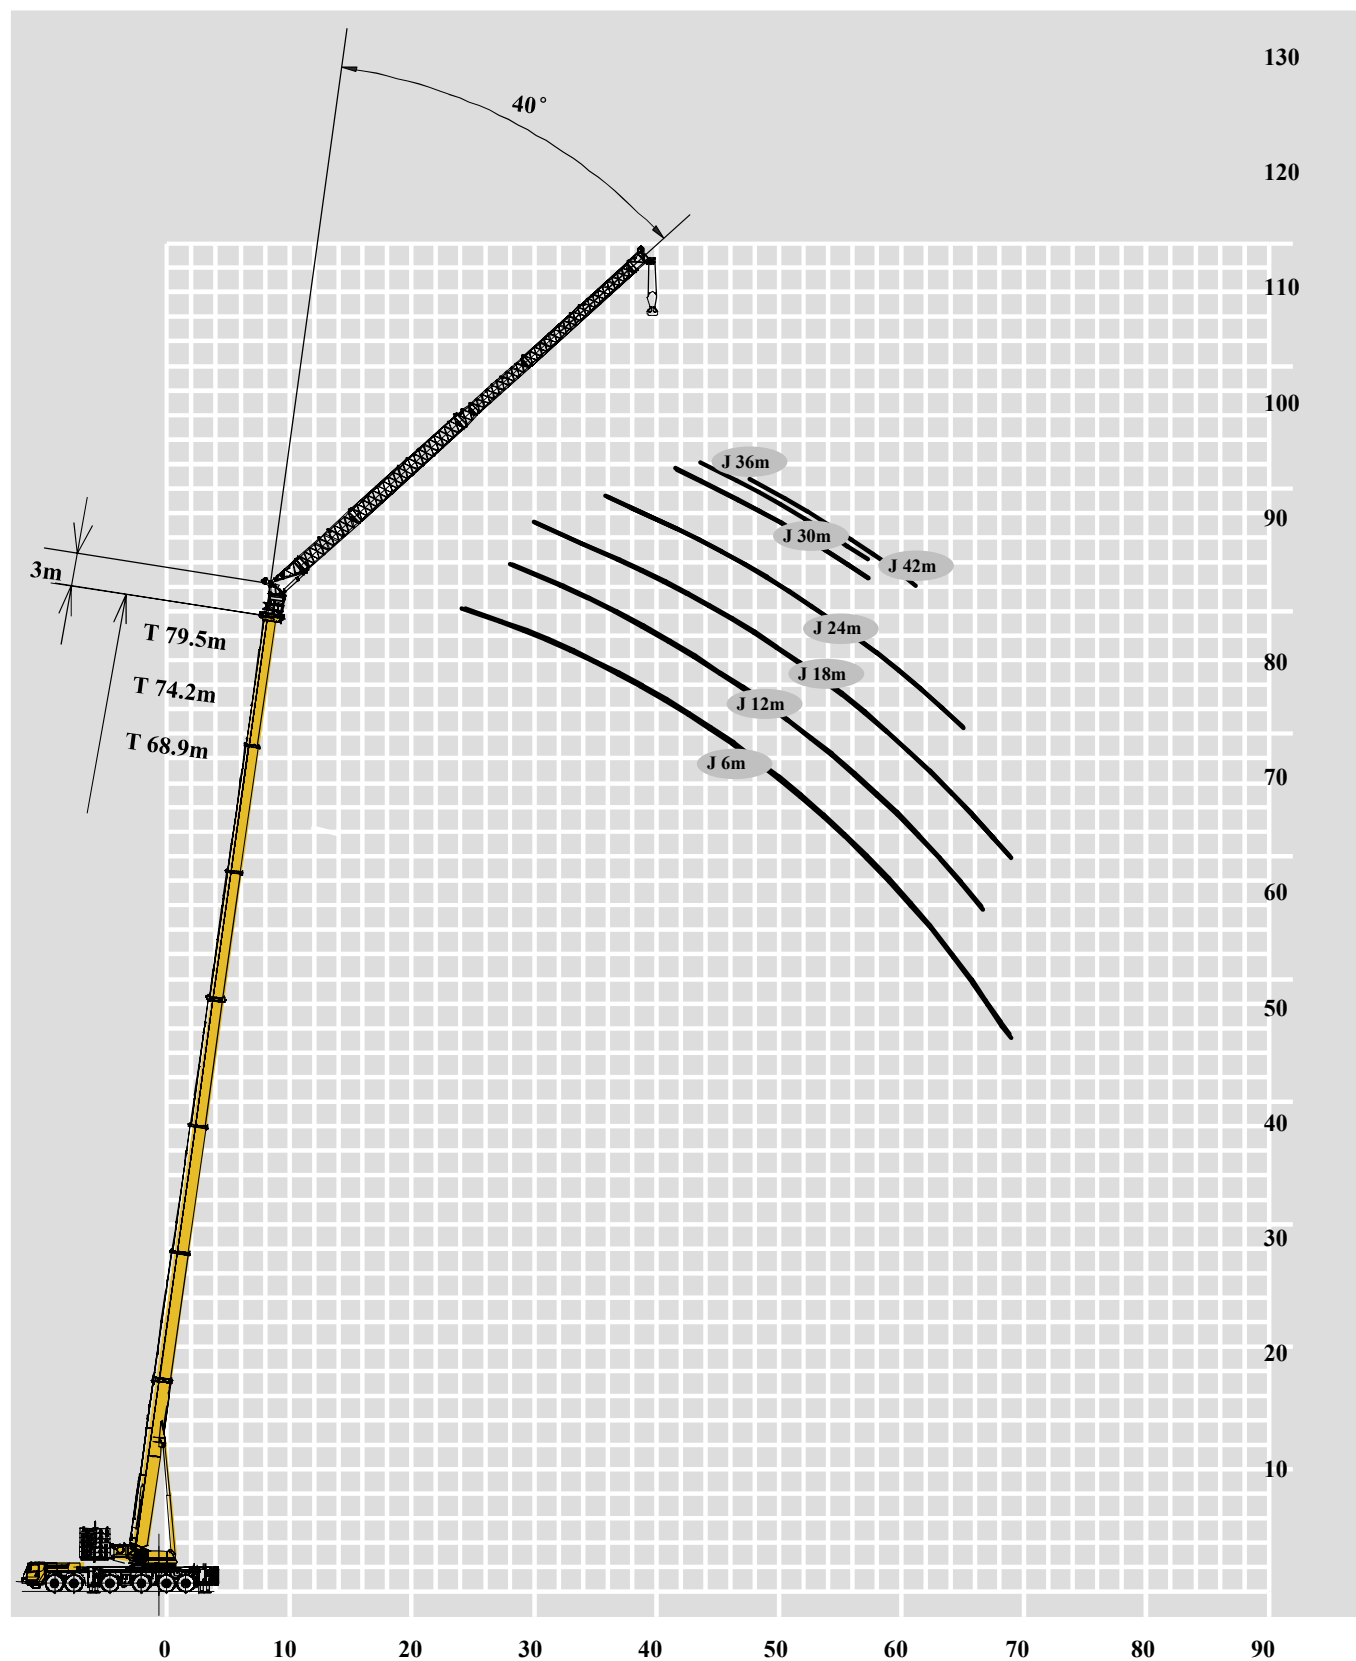
Rated lifting load table

T 16.1~79.5m

  16.1-79.5 m T  3 m V  6m F  9.4×9.6m  360°  143 t 								
	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m	
	20°							
	6 m							
5	41.4							5
6	39.0							6
7	36.6							7
8	34.8							8
9	33.2							9
10	31.6							10
12	28.7							12
14	26.6	32.2						14
16	24.9	30.8	30.4					16
18	23.3	29.3	28.3					18
20	22.4	28.6	25.7	21.7	18.7			20
22		27.2	23.2	19.7	17.2	14.9		22
24		25.5	21.4	17.8	15.6	13.7	11.9	24
26		23.8	19.8	16.4	14.4	12.6	10.9	26
28		21.9	18.2	15.2	13.2	11.6	10.0	28
30		20.5	16.9	14.1	12.2	10.6	9.2	30
32		19.0	15.6	13.2	11.4	9.9	8.7	32
34		17.9	14.8	12.3	10.4	9.2	8.1	34
36		16.9	13.6	11.4	9.6	8.6	7.5	36
38		15.8	12.7	10.5	9.2	8.1	7.1	38
40		14.9	11.9	9.9	8.4	7.5	6.7	40
42		14.1	11.5	9.3	8.0	7.0	6.3	42
44		13.2	10.7	8.7	7.5	6.6	5.9	44
46		12.5	10.2	8.3	6.9	6.2	5.5	46
48		11.6	9.2	7.9	6.5	5.7	5.3	48
50		10.9	8.5	7.5	6.1	5.5	4.9	50
52		10.4	7.9	6.8	5.7	5.1	4.7	52
54		9.7	7.3	6.2	5.4	4.9	4.5	54
56		8.7	6.7	5.5	5.1	4.6	4.1	56
58			5.9	5.0	4.8	4.2	3.9	58
60			5.1	4.6	4.5	4.0	3.7	60
62				4.0	3.9	3.8	3.5	62
64				3.5	3.3	3.3	3.3	64
66				3.0	2.8	2.8	2.8	66
68					2.4	2.4	2.4	68
70					2.0	2.0	2.0	70
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	4	3	3	2	2	2	1	倍率 n

起升高度曲线图 Lifting height chart




主臂+副臂
Boom + Jib



起重性能表

Rated lifting load table





T 16.1~68.9 m

  T  V  F  9.4×9.6 m  360°  143 t 								
		16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m		
		40°						
		42 m						
34	3.0						34	
36	2.9						36	
38	2.8						38	
40	2.7						40	
42	2.5						42	
44	2.4	2.8					44	
46	2.3	2.8	2.8				46	
48	2.1	2.7	2.7	2.8			48	
50	2.1	2.6	2.6	2.7	2.7		50	
52	2.0	2.6	2.6	2.6	2.7		52	
54	2.0	2.5	2.5	2.6	2.7		54	
56		2.4	2.5	2.5	2.6		56	
58		2.3	2.4	2.5	2.6		58	
60		2.3	2.4	2.5	2.4		60	
62		2.3	2.3	2.4	2.2		62	
64		2.2	2.3	2.4	2.0		64	
66		2.2	2.3	2.4			66	
68		2.2	2.3	2.4			68	
70		2.2	2.2	2.2			70	
72		2.1	2.2	2.1			72	
74		2.1	2.2				74	
76		2.1	2.2				76	
78		2.1	2.0				78	
80		2.0					80	
82		2.0					82	
84							84	
86							86	
组合 Code	000000	211111	221111	222111	222211	组合 Code		
倍率 n	1	1	1	1	1	倍率 n		

起重性能表

Rated lifting load table

T 16.1~74.2 m

 16.1-74.2 m T 3 m V 36 m F 9.4×9.6 m 360° 143 t 									
		16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m		
		40°							
		36 m							
30	4.3							30	
32	4.1							32	
34	3.9							34	
36	3.7							36	
38	3.6		4.1					38	
40	3.4		4.0	4.1				40	
42	3.3		3.9	4.0	4.0			42	
44	3.1		3.8	3.9	4.0			44	
46	3.1		3.7	3.8	3.9	4.0	3.3	46	
48			3.6	3.7	3.8	3.9	3.3	48	
50			3.6	3.7	3.8	3.8	3.1	50	
52			3.5	3.6	3.7	3.6	2.9	52	
54			3.5	3.6	3.7	3.4	2.7	54	
56			3.4	3.5	3.6	3.2	2.5	56	
58			3.4	3.5	3.6	3.0	2.3	58	
60			3.3	3.4	3.6	2.8	2.2	60	
62			3.3	3.4	3.4	2.6		62	
64			3.3	3.4	3.1	2.4		64	
66			3.2	3.4	2.9	2.1		66	
68			3.2	3.3	2.7	2.0		68	
70			3.2	3.3	2.5			70	
72			3.2	3.2	2.3			72	
74			3.1	2.9	2.2			74	
76			3.1	2.6				76	
78				2.2				78	
80				2.0				80	
组合 Code	000000	211111	221111	222111	222211	222221	222221	组合 Code	
倍率 n	1	1	1	1	1	1	1	倍率 n	

起重性能表

Rated lifting load table




T 16.1~79.5 m

16.1-79.5 m T 3 m V 30 m F 9.4×9.6 m 360° 143 t m 40° 30 m m								
26	5.5							26
28	5.2							28
30	5.0							30
32	4.8							32
34	4.6	5.3						34
36	4.4	5.2	5.2					36
38	4.3	5.2	5.2	5.3				38
40	4.2	5.0	5.1	5.2	5.2			40
42	4.2	5.0	5.0	5.1	5.2	4.3		42
44		4.8	4.9	5.1	5.2	4.3	3.4	44
46		4.8	4.9	5.0	4.9	4.1	3.4	46
48		4.7	4.8	4.9	4.7	3.9	3.2	48
50		4.7	4.7	4.9	4.4	3.6	3.0	50
52		4.6	4.7	4.9	4.2	3.3	2.8	52
54		4.5	4.7	4.8	3.9	3.1	2.6	54
56		4.5	4.6	4.5	3.6	2.9	2.4	56
58		4.5	4.6	4.3	3.4	2.8	2.3	58
60		4.4	4.6	4.1	3.2	2.6	2.1	60
62		4.4	4.6	3.9	3.0	2.4		62
64		4.4	4.6	3.7	2.8	2.2		64
66		4.4	4.4	3.5	2.6	2.1		66
68		4.4	4.1	3.2	2.4	2.0		68
70		4.3	3.7	2.9	2.3			70
72			3.4	2.5	2.1			72
74			3.0	2.3				74
76				2.0				76
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	1	1	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table






T 16.1~79.5 m

     								
	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m	
	40°							
	24 m							
20	8.4							20
22	8.0							22
24	7.5							24
26	7.2							26
28	6.9							28
30	6.6	7.8						30
32	6.4	7.6	7.7	7.8				32
34	6.2	7.4	7.6	7.6	7.4			34
36	6.2	7.4	7.5	7.6	7.4	5.8		36
38		7.2	7.4	7.6	7.0	5.8	4.6	38
40		7.1	7.3	7.5	6.6	5.4	4.6	40
42		7.0	7.2	7.4	6.1	5.1	4.4	42
44		7.0	7.1	7.2	5.7	4.8	4.2	44
46		6.8	7.0	6.7	5.4	4.5	3.9	46
48		6.8	6.8	6.3	5.1	4.3	3.7	48
50		6.5	6.7	6.0	4.8	4.1	3.5	50
52		6.5	6.5	5.7	4.6	3.9	3.3	52
54		6.3	6.4	5.4	4.3	3.6	3.1	54
56		6.1	6.3	5.0	4.1	3.4	2.9	56
58		6.1	5.9	4.8	3.9	3.2	2.8	58
60		5.9	5.6	4.6	3.7	3.0	2.6	60
62		5.9	5.4	4.4	3.5	2.9	2.4	62
64		5.8	4.9	4.0	3.3	2.7	2.3	64
66			4.5	3.6	3.0	2.7	2.2	66
68			4.0	3.3	2.6	2.5	2.0	68
70				3.0	2.4	2.1		70
72				2.7	2.0			72
74								74
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	1	1	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table




T 16.1~79.5 m

16.1-79.5 m T 3 m V 18 m F 9.4×9.6 m 360° 143 t								
	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m	
	40°							
	18 m							
16	10.8							16
18	10.8							18
20	10.4							20
22	10.0							22
24	9.6	10.8						24
26	9.2	10.8	10.7					26
28	9.0	10.7	10.7	10.8	10.0			28
30	9.0	10.6	10.7	10.8	10.0	7.4		30
32		10.5	10.7	10.7	9.4	7.4	6.0	32
34		10.3	10.5	10.4	8.8	7.4	6.0	34
36		10.2	10.1	9.8	8.3	6.9	6.0	36
38		9.8	9.9	9.2	7.8	6.5	5.7	38
40		9.6	9.7	8.8	7.3	6.1	5.4	40
42		9.4	9.4	8.1	6.9	5.8	5.1	42
44		9.0	9.2	7.7	6.5	5.4	4.8	44
46		8.8	9.0	7.3	6.2	5.2	4.6	46
48		8.6	8.6	6.9	5.9	5.1	4.3	48
50		8.6	8.2	6.7	5.6	4.6	4.1	50
52		8.4	7.7	6.3	5.2	4.4	3.9	52
54		8.1	7.3	6.0	5.0	4.2	3.7	54
56		8.0	7.1	5.7	4.7	4.0	3.5	56
58		7.9	6.4	5.5	4.5	3.8	3.4	58
60			5.8	4.9	4.3	3.6	3.2	60
62			5.3	4.4	3.9	3.5	3.0	62
64				4.0	3.5	3.3	2.9	64
66				3.6	3.2	3.0	2.8	66
68					2.8	2.7	2.5	68
70					2.5	2.4	2.3	70
72						2.2	2.0	72
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	1	1	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table





T 16.1~79.5 m

 16.1-79.5 m T  3 m V  12m F  9.4×9.6 m  360°  143 t  								
	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m	
	40°							
	12 m							
10	18.8							10
12	18.8							12
14	18.0							14
16	17.2							16
18	16.4	18.7						18
20	15.9	17.9						20
22	15.5	17.1	16.7					22
24	15.3	16.4	16.4	15.9				24
26		16.0	15.9	14.8	12.8			26
28		15.2	15.2	14.0	11.9	10.3		28
30		14.8	14.8	13.0	11.1	9.6	7.4	30
32		14.4	14.4	12.2	10.3	9.0	7.2	32
34		14.0	13.7	11.4	9.7	8.4	7.0	34
36		13.6	12.9	10.7	9.1	8.1	6.8	36
38		13.2	12.0	10.0	8.7	7.6	6.5	38
40		12.8	11.5	9.6	8.1	7.1	6.1	40
42		12.4	10.9	9.0	7.7	6.7	5.9	42
44		12.2	10.5	8.6	7.2	6.5	5.5	44
46		11.9	9.9	8.2	6.8	6.1	5.3	46
48		11.6	9.4	7.8	6.6	5.9	5.1	48
50		11.0	9.0	7.4	6.2	5.5	4.9	50
52		10.3	8.6	6.9	6.0	5.3	4.7	52
54			7.8	6.6	5.6	5.1	4.5	54
56			7.1	6.0	5.4	4.8	4.3	56
58				5.4	4.9	4.6	4.0	58
60				5.0	4.4	4.3	3.8	60
62					4.0	3.9	3.5	62
64					3.6	3.5	3.1	64
66						3.2	2.9	66
68						2.8	2.6	68
70							2.2	70
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	2	2	2	2	1	1	1	倍率 n

起重性能表

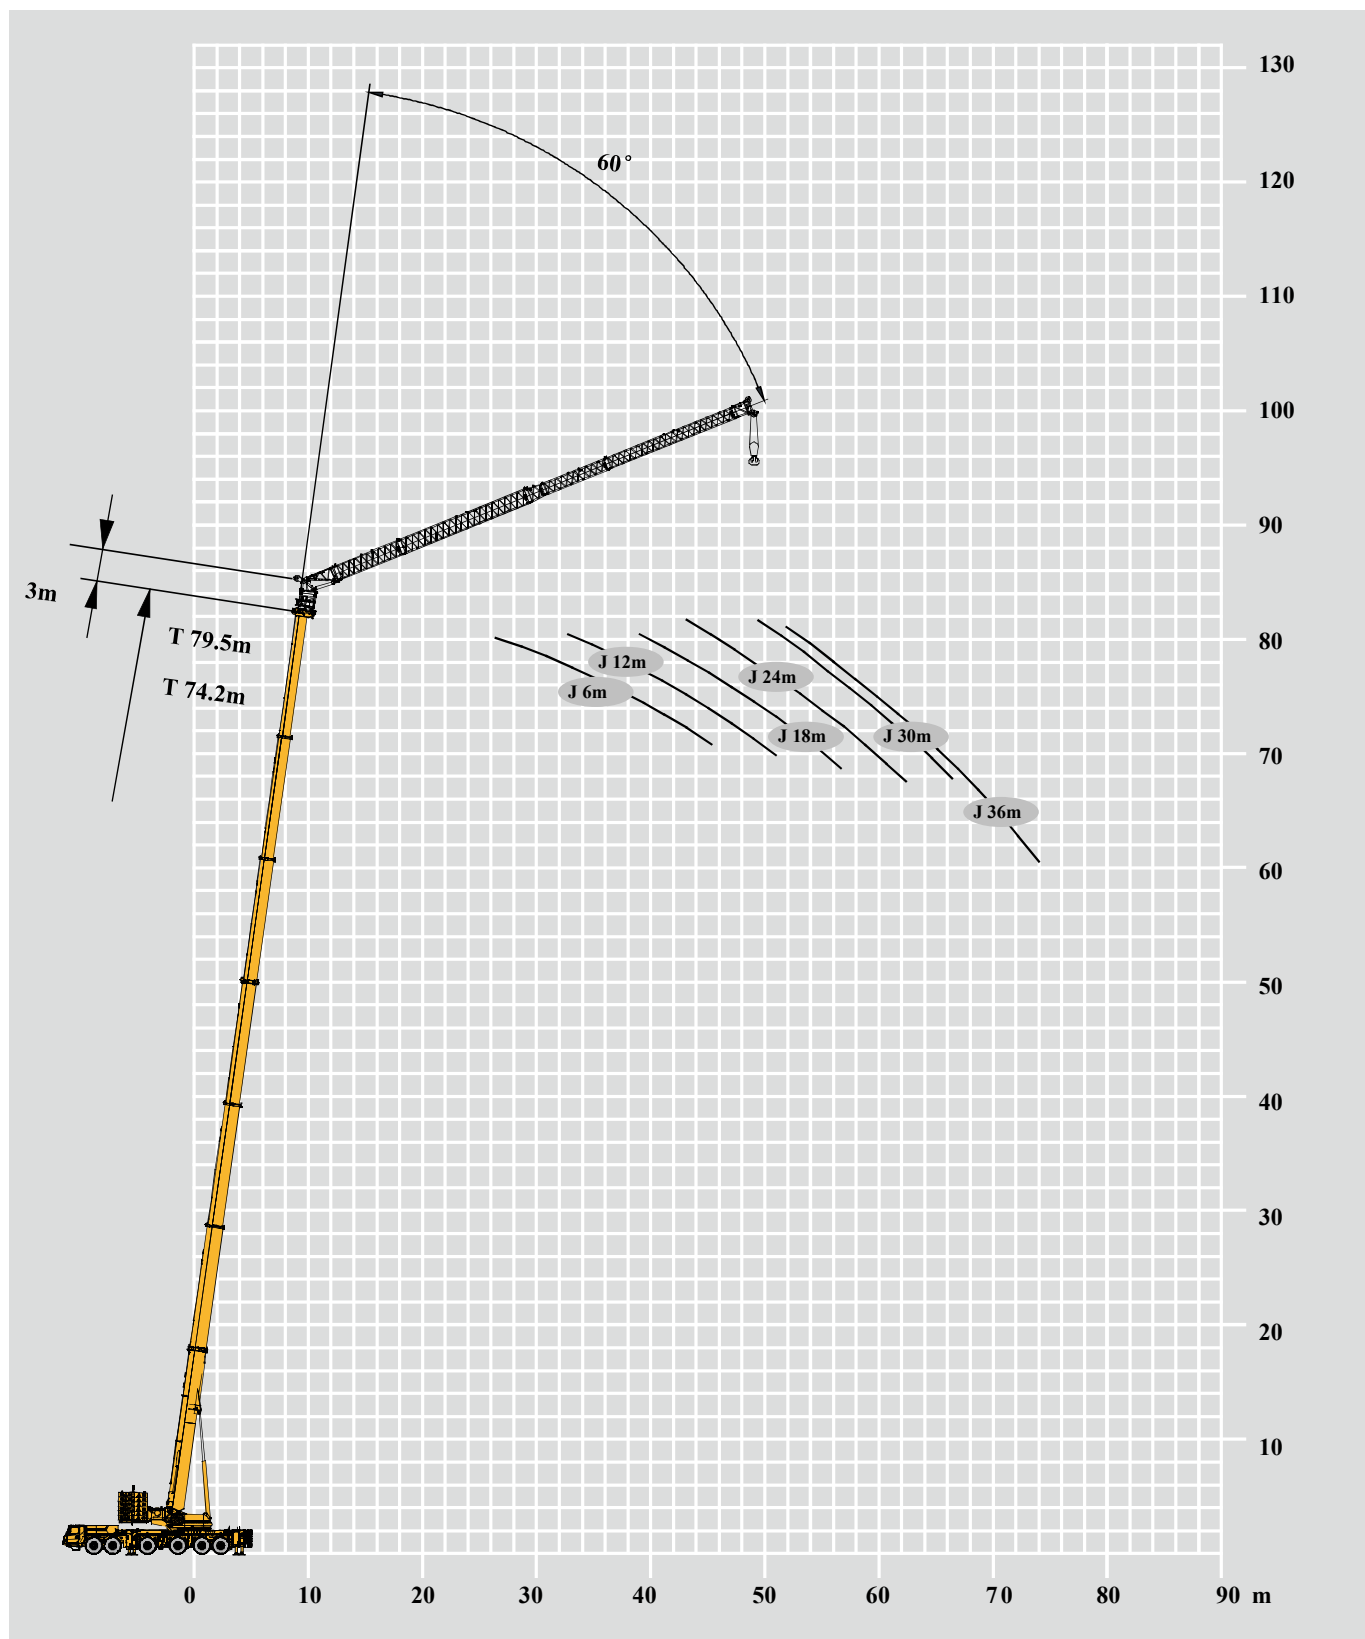
Rated lifting load table

T 16.1~79.5 m

       								
	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m	
	40°							
	6 m							
6	27.4							6
7	27.4							7
8	26.6							8
9	25.8							9
10	25.0							10
12	23.7							12
14	22.9	24.0						14
16	22.1	23.7	23.5					16
18	22.1	23.1	23.1					18
20		22.5	22.5	21.2	18.3			20
22		22.2	22.0	19.5	16.8	14.8		22
24		21.8	21.8	18.2	15.7	13.6		24
26		21.6	20.3	17.0	14.5	12.7	10.9	26
28		21.3	18.6	15.8	13.6	12.0	10.1	28
30		21.1	17.4	14.5	12.8	11.2	9.5	30
32		19.8	16.5	13.6	11.8	10.4	8.9	32
34		18.6	15.3	12.8	11.0	9.6	8.4	34
36		17.5	14.5	12.1	10.4	9.1	8.0	36
38		16.7	13.5	11.3	9.8	8.7	7.6	38
40		15.8	12.6	10.8	9.2	8.2	7.2	40
42		15.0	12.0	10.2	8.8	7.7	6.8	42
44		14.1	11.1	9.6	8.4	7.3	6.4	44
46		13.0	10.6	9.1	8.0	6.9	6.3	46
48			9.8	8.5	7.6	6.6	6.1	48
50			8.9	8.0	7.2	6.2	5.6	50
52				7.2	6.5	6.0	5.4	52
54				6.6	5.9	5.5	5.2	54
56					5.4	5.0	5.0	56
58					4.9	4.6	4.6	58
60						4.2	4.2	60
62						3.8	3.8	62
64							3.2	64
66							2.7	66
68								68
70								70
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	3	2	2	2	2	2	1	倍率 n

起升高度曲线图 Lifting height chart




主臂+副臂
Boom + Jib



起重性能表

Rated lifting load table

T 16.1~74.2 m

      															
		16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m								
		60°													
		36 m													
36	3.5							36							
38	3.4							38							
40	3.3							40							
42	3.3							42							
44	3.3	3.5						44							
46	3.3	3.4	3.4					46							
48		3.4	3.4	3.5				48							
50		3.4	3.4	3.5	3.5			50							
52		3.4	3.4	3.5	3.5	2.8		52							
54		3.4	3.4	3.5	3.5	2.7		54							
56		3.4	3.4	3.5	3.5	2.7		56							
58		3.3	3.4	3.4	3.5	2.6		58							
60		3.3	3.3	3.4	3.4	2.6		60							
62			3.3	3.4	3.3	2.6		62							
64			3.3	3.4	3.3	2.5		64							
66				3.3	3.1	2.5		66							
68					3.0	2.5		68							
70						2.5		70							
72								72							
74								74							
组合 Code	000000	211111	221111	222111	222211	222221		组合 Code							
倍率 n	1	1	1	1	1	1	1	倍率 n							

起重性能表

Rated lifting load table




T 16.1~79.5 m

 m 16.1-79.5 m T 3 m V 30 m F 9.4×9.6 m 360° 143 t  m									
		53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m		
		60°							
		30 m							
30								30	
32								32	
34								34	
36								36	
38	4.6							38	
40	4.6	4.6						40	
42	4.6	4.6	4.7					42	
44	4.6	4.6	4.7	4.8				44	
46	4.6	4.6	4.7	4.8				46	
48	4.6	4.6	4.7	4.8	4.0			48	
50	4.6	4.6	4.7	4.8	3.8	3.1		50	
52	4.6	4.6	4.7	4.8	3.8	3.1		52	
54	4.6	4.5	4.6	4.7	3.7	3.0		54	
56		4.5	4.6	4.5	3.7	3.0		56	
58		4.5	4.6	4.4	3.6	3.0		58	
60			4.5	4.3	3.6	2.9		60	
62				4.0	3.5	2.8		62	
64					3.5	2.7		64	
66					3.5	2.6		66	
68								68	
70								70	
72								72	
组合 Code	211111	221111	222111	222211	222221	222222		组合 Code	
倍率 n	1	1	1	1	1	1		倍率 n	

起重性能表

Rated lifting load table

T 16.1~79.5 m

      															
		53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m								
		60°													
		24 m													
26								26							
28								28							
30								30							
32	7.0							32							
34	7.0	7.0						34							
36	7.0	7.0	7.2					36							
38	7.0	7.0	7.2	6.9				38							
40	7.0	7.0	7.2	6.7				40							
42	7.0	7.0	7.1	6.5	5.4			42							
44	7.0	7.0	6.9	6.4	5.2	4.4		44							
46	6.8	6.8	6.9	6.2	5.1	4.3		46							
48	6.7	6.7	6.7	6.2	5.1	4.2		48							
50		6.7	6.7	5.9	4.9	4.1		50							
52		6.5	6.5	5.8	4.9	4.1		52							
54			6.5	5.7	4.7	4.0		54							
56				5.4	4.7	3.9		56							
58					4.7	3.7		58							
60					4.5	3.6		60							
62						3.5		62							
64								64							
66								66							
组合 Code	211111	221111	222111	222211	222221	222222		组合 Code							
倍率 n	1	1	1	1	1	1	1	倍率 n							

起重性能表

Rated lifting load table






T 16.1~79.5 m

 16.1-79.5 m T 3 m V 18 m F 9.4×9.6 m 360° 143 t 									
		53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m		
		60°							
		18 m							
20								20	
22								22	
24								24	
26								26	
28	10.2	10.4						28	
30	10.2	10.4	10.3					30	
32	10.2	10.2	10.1					32	
34	10.1	10.0	9.9	9.0				34	
36	9.8	9.8	9.7	8.7	7.4			36	
38	9.7	9.6	9.6	8.4	7.2	5.7		38	
40	9.5	9.4	9.4	8.3	7.0	5.7		40	
42	9.3	9.2	9.0	8.1	6.8	5.6		42	
44		9.2	8.9	7.9	6.6	5.5		44	
46		9.0	8.6	7.7	6.4	5.4		46	
48			8.3	7.4	6.3	5.4		48	
50				7.1	6.2	5.2		50	
52					6.1	5.2		52	
54					6.0	5.2		54	
56						4.9		56	
58								58	
60								60	
组合 Code	211111	221111	222111	222211	222221	222222		组合 Code	
倍率 n	1	1	1	1	1	1	1	倍率 n	

起重性能表

Rated lifting load table




T 16.1~79.5 m

       									
		53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m		
		60°							
		12 m							
12								12	
14								14	
16								16	
18								18	
20	15.6							20	
22	15.5	15.1						22	
24	15.4	15.1						24	
26	15.2	15.1	14.9					26	
28	14.8	14.8	14.5	12.4				28	
30	14.4	14.4	13.9	11.8	9.1			30	
32	14.1	14.0	13.4	11.5	9.0	5.9		32	
34	13.8	13.8	13.0	11.1	8.8	5.8		34	
36	13.5	13.6	12.6	10.7	8.6	5.7		36	
38		13.2	12.0	10.3	8.4	5.6		38	
40		13.1	11.4	10.0	8.3	5.4		40	
42			10.9	9.6	8.1	5.3		42	
44				9.3	7.8	5.2		44	
46					7.6	5.1		46	
48					7.4	5.1		48	
50						5.0		50	
52								52	
54								54	
组合 Code	211111	221111	222111	222211	222221	222222		组合 Code	
倍率 n	2	2	2	1	1	1		倍率 n	

起重性能表

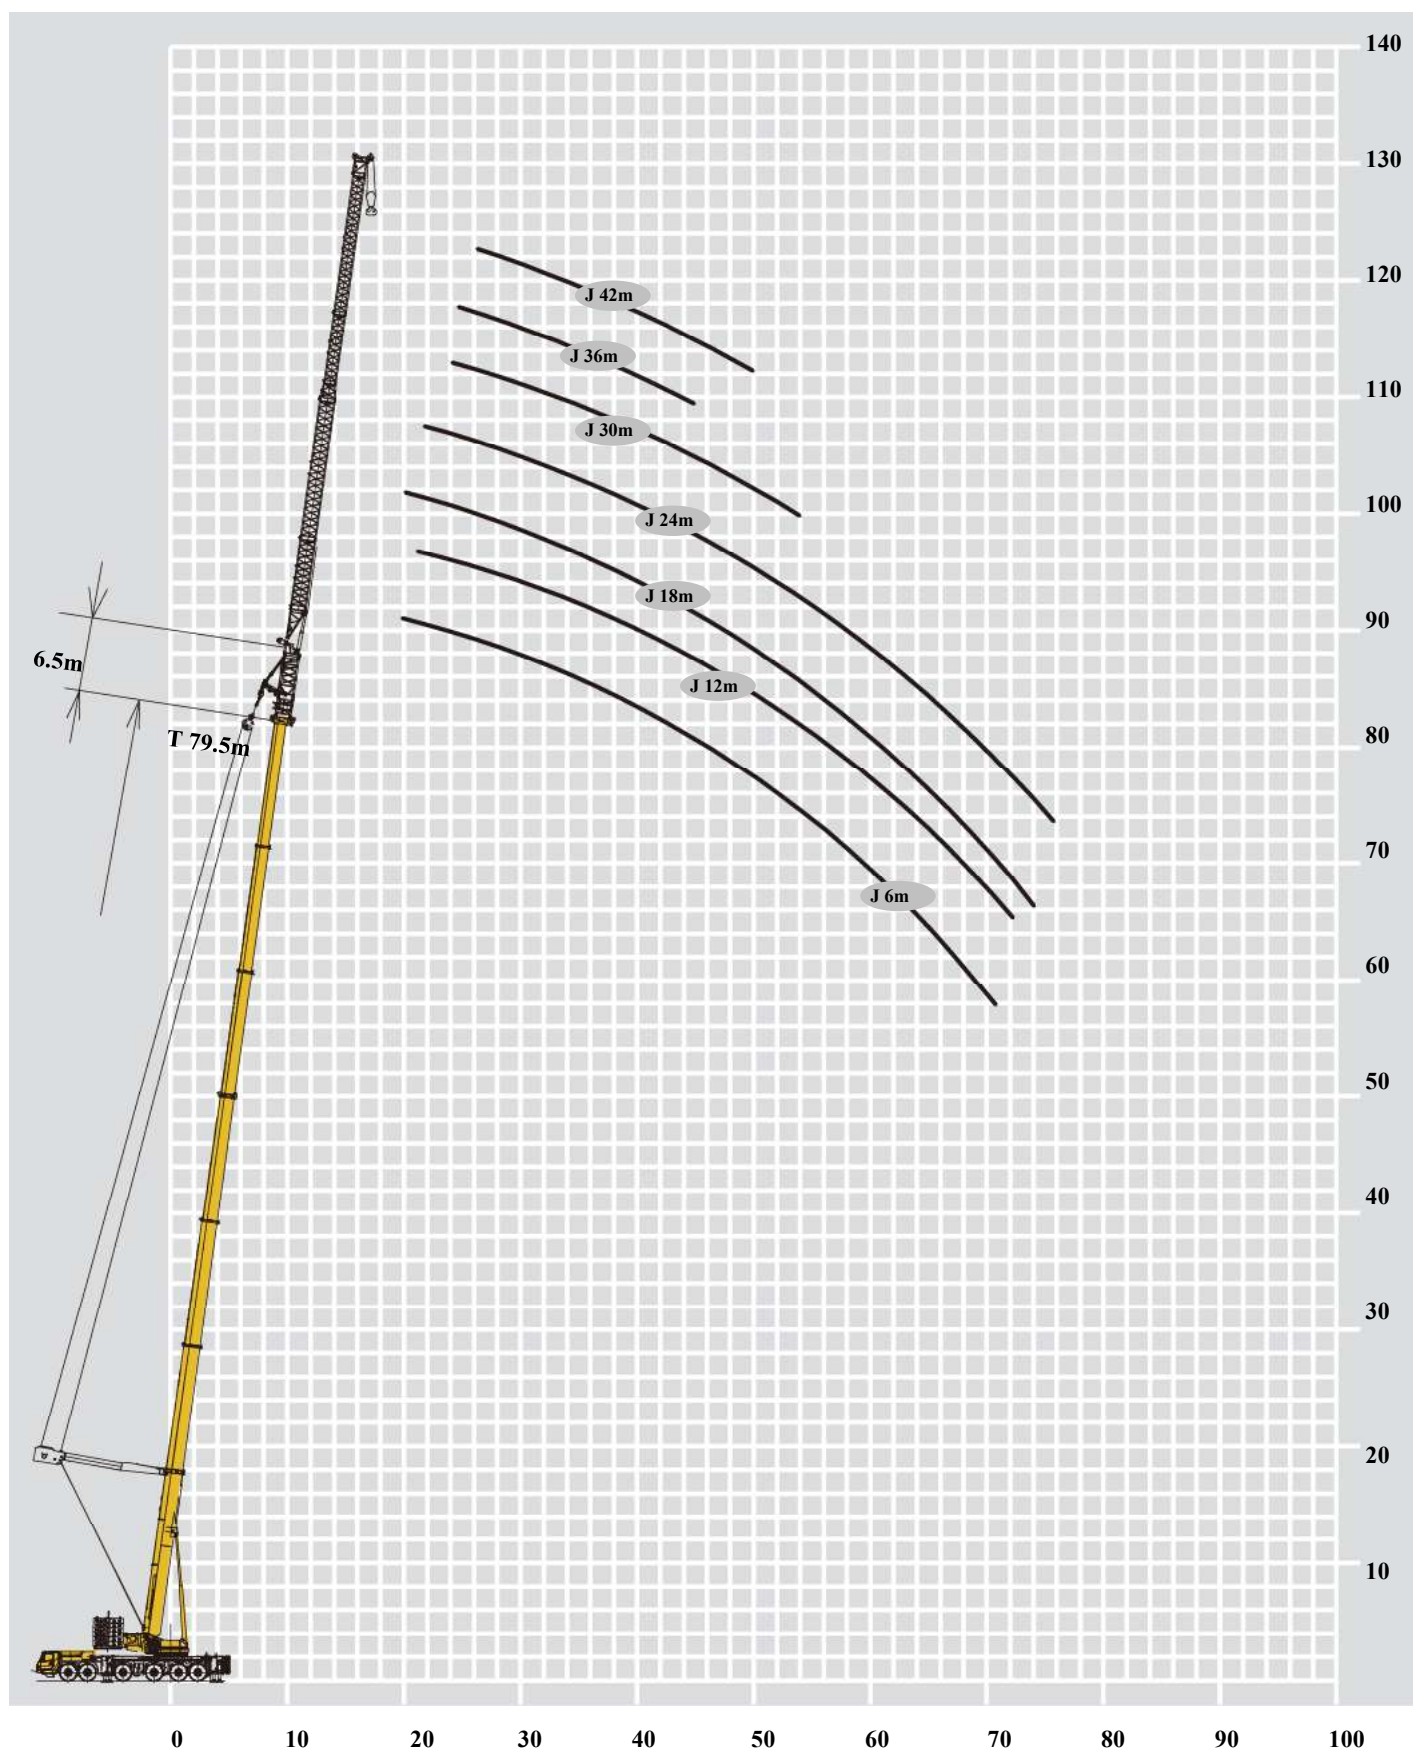
Rated lifting load table

T 16.1~79.5 m

 T V F 9.4×9.6 m 360° 143 t 									
		53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m		
		60°							
		6 m							
7								7	
8								8	
9								9	
10								10	
12								12	
14	20.8							14	
16	20.8	20.5						16	
18	20.8	20.5						18	
20	20.5	20.5	20.3					20	
22	20.4	20.5	20.1	17.0				22	
24	20.4	20.1	19.7	16.0	14.1			24	
26	20.4	20.1	18.7	15.3	13.4	11.8		26	
28	20.4	19.8	17.8	14.6	12.8	11.3		28	
30	20.3	19.6	17.0	14.2	12.4	10.9		30	
32		18.8	16.1	13.4	12.0	10.4		32	
34		17.9	15.3	12.9	11.6	10.0		34	
36			14.4	12.4	11.2	9.7		36	
38				11.9	10.7	9.4		38	
40					10.3	9.3		40	
42					9.9	9.1		42	
44						8.6		44	
46								46	
48								48	
组合 Code	211111	221111	222111	222211	222221	222222		组合 Code	
倍率 n	2	2	2	2	2	1		倍率 n	

起升高度曲线图 Lifting height chart






主臂+超起+副臂
Boom+ Super lifting device + Jib



起重性能表

Rated lifting load table






T 53.1~79.5 m

	      															
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5		
	6.5m															
	0°															
	42 m															
18	13.4	13.3	13.2	13.0	13.5	13.6									18	
20	12.5	12.6	12.6	12.5	12.7	12.8									20	
22	11.7	11.7	11.7	11.9	11.9	12.1	11.7	12.0	12.0	11.1	11.3				22	
24	11.0	11.0	11.0	11.2	11.1	11.2	11.2	11.4	11.3	10.7	11.0	9.7	10.2		24	
26	10.4	10.5	10.5	10.7	10.7	10.7	10.7	10.8	10.8	10.3	10.6	9.4	9.9	4.4	26	
28	9.8	9.7	9.9	10.0	10.1	10.1	10.2	10.3	10.2	10.0	10.2	9.1	9.7	4.3	28	
30	9.2	9.2	9.1	9.4	9.5	9.4	9.6	9.8	9.7	9.6	9.8	8.5	9.1	4.2	30	
32	8.6	8.6	8.6	8.8	8.9	9.0	9.1	9.2	9.3	9.2	9.2	7.9	8.4	4.1	32	
34	8.0	8.1	8.1	8.4	8.4	8.4	8.7	8.7	8.7	8.6	8.8	7.3	7.7	4.0	34	
36	7.6	7.6	7.7	8.0	8.0	8.0	8.2	8.3	8.3	8.2	8.4	6.7	7.0	3.9	36	
38	7.2	7.2	7.3	7.6	7.6	7.6	7.8	7.8	7.9	7.9	8.0	6.0	6.3	3.8	38	
40	6.8	6.8	6.9	7.2	7.2	7.2	7.4	7.4	7.5	7.6	7.6	5.2	5.4	3.7	40	
42	6.5	6.5	6.5	6.8	6.8	6.8	7.0	7.1	7.1	7.2	7.3	4.5	4.7	3.4	42	
44	6.2	6.2	6.2	6.4	6.5	6.5	6.7	6.7	6.8	6.9	6.9	3.9	4.0	3.1	44	
46	5.9	5.9	5.9	6.1	6.2	6.2	6.4	6.5	6.5	6.6	6.7	3.4	3.4	2.8	46	
48	5.7	5.6	5.6	5.9	5.9	5.9	6.1	6.2	6.2	6.4	6.4	2.7	2.8	2.5	48	
50	5.4	5.4	5.4	5.6	5.7	5.7	5.9	6.0	6.0	6.1	6.2	2.1	2.2	2.2	50	
52	5.1	5.1	5.1	5.4	5.5	5.4	5.7	5.7	5.7	5.9	5.9				52	
54	4.9	4.9	4.9	5.2	5.2	5.2	5.4	5.5	5.5	5.7	5.6				54	
56	4.7	4.7	4.7	5.0	4.9	5.0	5.2	5.2	5.3	5.5	5.4				56	
58	4.5	4.5	4.5	4.8	4.7	4.8	5.0	5.0	5.1	5.3	5.2				58	
60	4.3	4.3	4.3	4.6	4.5	4.6	4.8	4.8	4.8	5.1	5.0				60	
62	4.2	4.1	4.2	4.4	4.4	4.4	4.6	4.6	4.6	4.8	4.8				62	
64	3.9	4.0	4.0	4.2	4.2	4.2	4.5	4.4	4.4	4.7	4.7				64	
66	3.8	3.8	3.8	4.0	4.1	4.0	4.3	4.3	4.3	4.5	4.5				66	
68	3.7	3.7	3.7	3.9	3.9	3.9	4.2	4.1	4.1	4.4	4.4				68	
70	3.5	3.5	3.5	3.7	3.8	3.8	4.0	4.0	4.0	4.3	4.2				70	
72	3.4	3.4	3.4	3.6	3.6	3.6	3.9	3.9	3.8	4.1	4.0				72	
74	3.3	3.3	3.3	3.5	3.5	3.2	3.7	3.5	3.3	3.9	3.4				74	
76	3.2	3.2	2.8	3.4	3.3	2.7	3.4	3.0	2.8	3.6	2.9				76	
78	3.1	3.0	2.3	3.2	2.8	2.2	2.9	2.5	2.3	3.1	2.4				78	
80	3.0	2.8		2.7	2.3		2.5	2.0		2.6					80	
82	2.6	2.4		2.3			2.0			2.1					82	
84	2.2														84	
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code	
倍率 n	1	1	1	1	1	1	1	1	1	1	1	1	1	1	倍率 n	

起重性能表

Rated lifting load table






T 53.1~79.5 m

      															
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
	6.5m														
	0°														
	36 m														
18	15.8	15.8	16.0	15.6	15.8	15.9									18
20	14.9	14.9	15.0	14.9	15.0	15.2	14.7	15.0	14.9	14.3	15.0				20
22	14.1	14.0	14.2	14.1	14.3	14.4	14.2	14.3	14.4	13.8	14.2	10.0	10.2		22
24	13.1	13.1	13.2	13.5	13.5	13.7	13.7	13.6	13.8	13.2	13.5	9.8	10.0	5.2	24
26	12.3	12.3	12.4	12.7	12.7	12.7	12.9	13.0	13.0	12.7	12.8	9.6	9.8	5.2	26
28	11.5	11.5	11.6	11.9	11.9	11.9	12.2	12.2	12.3	12.1	12.3	9.3	9.6	5.2	28
30	11.0	11.0	11.0	11.2	11.3	11.2	11.6	11.6	11.6	11.5	11.7	9.1	9.4	5.2	30
32	10.5	10.6	10.6	10.7	10.8	10.8	11.0	11.1	11.1	11.0	11.2	8.9	9.2	5.2	32
34	10.0	10.0	10.0	10.3	10.3	10.5	10.6	10.6	10.6	10.7	10.9	8.6	9.0	5.2	34
36	9.4	9.4	9.4	9.7	9.8	9.9	10.2	10.2	10.3	10.4	10.5	8.4	8.7	5.0	36
38	8.9	9.0	9.0	9.4	9.4	9.4	9.6	9.7	9.8	9.9	10.0	8.0	8.3	4.5	38
40	8.5	8.6	8.6	8.9	8.9	9.0	9.3	9.2	9.3	9.5	9.6	7.6	7.9	3.8	40
42	8.1	8.2	8.2	8.5	8.5	8.6	8.9	8.8	8.9	9.1	9.2	7.2	7.5	3.1	42
44	7.7	7.8	7.8	8.0	8.1	8.2	8.5	8.4	8.5	8.7	8.7	6.9	7.1	2.4	44
46	7.3	7.4	7.4	7.7	7.7	7.7	8.0	8.0	8.1	8.3	8.4	6.5	6.8		46
48	7.0	7.0	7.0	7.4	7.4	7.4	7.7	7.7	7.8	8.0	8.1	6.0	6.2		48
50	6.7	6.7	6.7	7.1	7.1	7.1	7.4	7.4	7.4	7.7	7.8	5.7	5.9		50
52	6.5	6.4	6.5	6.9	6.8	6.8	7.1	7.1	7.2	7.5	7.5	5.2	5.5		52
54	6.2	6.2	6.2	6.5	6.6	6.6	6.9	6.9	6.9	7.1	7.2	4.7	4.8		54
56	6.0	5.9	6.0	6.3	6.3	6.3	6.7	6.6	6.7	6.9	6.9	4.1	4.2		56
58	5.8	5.7	5.8	6.1	6.0	6.1	6.4	6.4	6.4	6.7	6.7	3.6	3.8		58
60	5.5	5.5	5.5	5.9	5.8	5.8	6.2	6.2	6.2	6.5	6.5	3.3	3.4		60
62	5.2	5.3	5.3	5.6	5.6	5.6	6.0	5.9	6.0	6.3	6.3	3.2	3.3		62
64	5.0	5.1	5.1	5.4	5.4	5.4	5.8	5.7	5.8	6.1	6.1	2.6	2.6		64
66	4.9	4.9	5.0	5.2	5.2	5.2	5.6	5.5	5.3	5.9	5.5	2.5	2.5		66
68	4.7	4.8	4.6	5.0	5.1	4.6	5.3	5.0	4.7	5.6	4.9	2.0	2.4		68
70	4.6	4.6	4.0	4.9	4.6	3.9	4.8	4.3	4.0	5.0	4.2				70
72	4.4	4.5	3.4	4.4	4.0	3.3	4.2	3.7	3.5	4.4	3.7				72
74	4.1	3.9	2.8	3.9	3.4	2.8	3.6	3.2	2.9	3.8	3.1				74
76	3.6	3.4	2.3	3.3	2.9	2.3	3.1	2.7	2.4	3.3	2.6				76
78	3.1	2.9		2.8	2.4		2.6	2.2		2.8	2.1				78
80	2.6	2.4		2.3			2.1			2.3					80
82	2.2														82
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	2	2	2	2	2	2	2	2	2	2	2	1	1	1	倍率 n

起重性能表

Rated lifting load table






T 53.1~79.5 m

      															
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
	6.5m														
	0°														
	30 m														
16	20.1	20.1	20.0												16
18	18.9	18.8	18.9	18.8	18.9	19.1	18.7	18.9	19.2						18
20	17.4	17.5	17.5	17.9	17.8	18.0	18.0	18.0	18.1	17.5	17.8				20
22	16.2	16.1	16.3	16.7	16.6	16.8	17.1	17.2	17.3	16.8	17.1	14.6	15.0		22
24	15.1	15.0	15.1	15.5	15.6	15.6	15.9	16.1	16.2	16.0	16.3	14.1	14.4	6.9	24
26	14.1	14.1	14.2	14.6	14.6	14.7	15.1	15.1	15.0	15.3	15.4	13.5	13.9	6.9	26
28	13.1	13.3	13.4	13.7	13.8	13.8	14.2	14.1	14.3	14.3	14.7	13.0	13.3	6.9	28
30	12.4	12.5	12.6	12.8	13.0	12.9	13.3	13.4	13.5	13.5	13.9	12.4	12.7	6.9	30
32	11.8	11.7	11.8	12.2	12.2	12.3	12.7	12.8	12.7	13.0	13.1	11.8	12.1	6.9	32
34	11.2	11.2	11.2	11.6	11.6	11.7	12.0	12.0	12.1	12.4	12.4	11.3	11.5	6.9	34
36	10.7	10.7	10.8	11.0	11.1	11.1	11.5	11.4	11.5	11.8	12.0	10.8	10.9	6.9	36
38	10.5	10.5	10.5	10.7	10.8	10.8	11.0	11.0	10.9	11.2	11.4	10.2	10.2	6.2	38
40	9.9	9.9	10.0	10.4	10.4	10.5	10.8	10.7	10.8	10.9	10.9	9.7	9.7	5.4	40
42	9.5	9.5	9.6	10.0	10.0	10.0	10.4	10.5	10.4	10.7	10.8	9.2	9.3	5.0	42
44	9.1	9.1	9.2	9.6	9.6	9.5	10.0	9.9	10.0	10.3	10.4	8.8	8.8	4.6	44
46	8.7	8.7	8.7	9.2	9.2	9.1	9.6	9.5	9.6	9.9	10.0	8.4	8.5	4.1	46
48	8.3	8.3	8.3	8.8	8.8	8.8	9.2	9.1	9.2	9.5	9.6	8.0	8.2	3.4	48
50	7.9	7.9	8.0	8.4	8.4	8.5	8.8	8.9	8.8	9.3	9.3	7.8	7.8	3.0	50
52	7.7	7.7	7.7	8.1	8.1	8.1	8.5	8.5	8.6	8.9	8.9	7.5	7.5	2.5	52
54	7.3	7.3	7.4	7.8	7.8	7.8	8.2	8.2	8.2	8.6	8.7	7.2	7.2	2.0	54
56	7.1	7.1	7.1	7.5	7.6	7.5	8.0	7.9	8.0	8.3	8.3	7.0	7.0		56
58	6.8	6.8	6.8	7.2	7.2	7.3	7.6	7.7	7.6	8.1	8.1	6.8	6.7		58
60	6.6	6.6	6.6	7.0	6.9	7.0	7.4	7.4	7.2	7.8	7.5	6.8	6.2		60
62	6.4	6.4	6.2	6.8	6.7	6.2	7.2	6.7	6.4	7.4	6.7	6.6	5.9		62
64	6.2	6.2	5.5	6.6	6.2	5.5	6.4	5.9	5.7	6.7	5.9	6.0	5.2		64
66	6.0	5.9	4.8	5.9	5.5	4.8	5.7	5.2	4.9	5.9	5.2	6.0	5.2		66
68	5.5	5.2	4.1	5.2	4.8	4.1	5.1	4.6	4.3	5.3	4.5	5.3	4.5		68
70	4.9	4.6	3.5	4.6	4.2	3.5	4.4	3.9	3.7	4.7	3.9	4.5	3.8		70
72	4.3	4.0	2.9	4.0	3.6	2.9	3.8	3.4	3.1	4.1	3.3	4.2	3.4		72
74	3.7	3.4	2.3	3.5	3.0	2.3	3.3	2.8	2.5	3.5	2.8	3.6	2.8		74
76	3.2	2.9		2.9	2.5		2.8	2.3	2.0	3.0	2.2	3.0	2.3		76
78	2.7	2.4		2.4	2.0		2.3			2.5		2.7			78
80	2.2			1.9						2.0		2.2			80
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	2	2	2	2	2	2	2	2	2	2	2	2	2	1	倍率 n

起重性能表

Rated lifting load table






T 53.1~79.5 m

      															 
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
	6.5m														
	0°														
	24 m														
14	26.0	26.2	26.3												14
16	24.5	24.7	24.8	24.7	24.6	24.7									16
18	23.1	23.2	23.3	23.2	23.1	23.6	23.2	23.4	23.6	22.6	22.8				18
20	21.8	21.8	21.9	22.1	22.0	22.2	22.1	22.3	22.5	21.7	21.9	19.9	19.8		20
22	20.6	20.6	20.7	20.9	21.0	21.2	21.1	21.2	21.4	20.8	21.1	19.4	18.9	11.7	22
24	19.5	19.7	19.8	20.0	20.1	20.2	20.3	20.3	20.3	19.8	20.1	18.9	18.0	11.0	24
26	18.3	18.6	18.7	19.0	19.1	19.2	19.4	19.5	19.6	19.0	19.2	16.3	17.0	10.4	26
28	17.2	17.4	17.5	17.9	18.0	18.0	18.6	18.5	18.8	18.1	18.4	15.5	16.1	9.7	28
30	16.2	16.4	16.4	17.1	17.0	17.2	17.7	17.8	17.8	17.3	17.5	14.8	15.4	9.1	30
32	15.4	15.5	15.6	16.1	16.3	16.2	16.8	16.8	17.0	16.6	16.8	14.1	14.6	8.4	32
34	14.6	14.5	14.8	15.3	15.5	15.4	16.0	16.0	16.2	15.9	16.1	13.5	13.9	7.9	34
36	13.9	13.8	14.0	14.5	14.7	14.6	15.3	15.3	15.4	15.3	15.4	12.7	13.3	7.5	36
38	13.3	13.2	13.3	13.9	13.9	14.0	14.6	14.6	14.6	14.6	14.6	12.2	12.7	7.1	38
40	12.7	12.6	12.7	13.3	13.3	13.4	13.9	14.0	14.0	13.8	13.9	11.7	12.2	6.8	40
42	12.1	12.1	12.1	12.7	12.9	12.8	13.4	13.5	13.5	13.2	13.2	11.2	11.7	6.5	42
44	11.5	11.6	11.7	12.3	12.3	12.2	12.9	12.9	12.9	12.4	12.5	10.8	11.2	6.1	44
46	11.1	11.1	11.1	11.7	11.8	11.8	12.4	12.4	12.4	11.8	11.8	10.3	10.8	5.8	46
48	10.9	10.9	10.9	11.3	11.3	11.4	11.9	12.0	12.0	11.3	11.3	9.8	10.1	5.5	48
50	10.6	10.6	10.6	10.9	10.9	11.0	11.5	11.6	11.2	9.5	8.8	9.5	9.7	5.2	50
52	10.2	10.2	10.3	10.8	10.8	10.3	11.1	10.4	10.4	9.0	8.3	9.5	9.0	5.0	52
54	9.9	9.9	9.2	10.4	9.6	9.2	10.3	9.6	9.5	8.5	7.8	8.9	8.3	4.8	54
56	9.6	9.4	8.1	9.5	8.8	8.2	9.3	8.8	8.5	8.1	7.4	8.2	7.5	4.5	56
58	8.7	8.5	7.2	8.5	8.0	7.3	8.4	7.9	7.5	7.7	7.0	8.2	7.5	4.1	58
60	7.9	7.6	6.3	7.7	7.2	6.4	7.5	7.0	6.7	7.4	6.6	7.5	6.8	3.7	60
62	7.0	6.8	5.5	6.8	6.3	5.6	6.7	6.2	5.9	7.0	6.2	6.8	6.0	3.4	62
64	6.3	6.0	4.8	6.1	5.6	4.9	5.9	5.4	5.1	6.2	5.4	6.1	5.3	3.0	64
66	5.6	5.3	4.0	5.4	4.9	4.1	5.2	4.7	4.4	5.5	4.7	5.3	4.5	2.9	66
68	4.9	4.6	3.4	4.7	4.2	3.5	4.6	4.0	3.7	4.9	4.1	5.1	4.2	2.6	68
70	4.2	4.0	2.7	4.1	3.6	2.8	3.9	3.4	3.1	4.2	3.4	4.5	3.6	2.3	70
72	3.6	3.4	2.1	3.5	3.0	2.2	3.3	2.8	2.5	3.6	2.9	3.9	3.0	2.2	72
74	3.1	2.8		2.9	2.4		2.8	2.3	2.0	3.1	2.3	3.3	2.5	1.9	74
76	2.5	2.2		2.4			2.3			2.6		2.8	2.0	1.8	76
78										2.1		2.3			78
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	2	2	2	2	2	2	2	2	2	2	2	2	2	1	倍率 n

起重性能表

Rated lifting load table




T 53.1~79.5 m

      																
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5		
	6.5m															
	0°															
	18 m															
12	38.2	37.9	38.1												12	
14	35.1	35.0	35.6	35.5	35.3	35.6									14	
16	32.3	32.2	32.7	33.1	32.8	33.2	31.5	33.8	34.0						16	
18	29.8	29.8	30.2	29.9	29.7	29.9	30.0	30.5	31.0	26.3	26.8	24.2	25.5		18	
20	27.8	27.8	27.8	28.3	28.3	28.4	28.5	28.4	28.9	24.8	25.3	22.9	24.3	14.5	20	
22	25.9	25.8	26.0	26.8	27.1	27.2	26.9	26.9	27.3	23.7	24.3	21.8	23.1	13.9	22	
24	24.2	24.2	24.4	25.3	25.3	25.6	25.3	25.3	25.5	22.6	23.0	20.5	21.8	13.2	24	
26	22.6	22.6	22.8	23.7	23.9	24.0	23.9	23.9	23.9	21.6	22.0	19.4	20.6	12.6	26	
28	21.6	21.7	21.8	22.3	22.6	22.5	22.7	22.7	22.6	20.5	20.9	18.3	19.4	11.9	28	
30	20.7	20.8	20.8	21.5	21.6	21.5	21.4	21.4	21.1	19.4	19.7	17.1	18.3	11.3	30	
32	19.6	19.6	19.9	20.9	20.8	20.9	20.0	20.1	20.0	18.3	18.7	16.7	17.5	10.7	32	
34	18.7	18.7	18.8	19.5	19.5	19.5	18.9	18.9	18.9	17.0	17.7	15.9	16.6	10.1	34	
36	17.9	17.9	17.9	18.4	18.5	18.6	17.7	17.7	17.8	16.3	16.7	15.0	15.6	9.6	36	
38	17.1	17.1	17.1	17.6	17.6	17.6	17.3	17.3	16.9	15.4	15.9	14.2	14.8	9.0	38	
40	16.2	16.3	16.3	15.0	15.0	14.6	14.6	14.6	14.0	13.1	13.1	13.4	13.9	8.4	40	
42	15.4	15.5	15.2	14.8	14.4	13.7	13.2	13.2	13.2	12.8	12.3	12.6	13.1	8.0	42	
44	14.9	15.0	14.4	13.6	12.9	12.9	13.1	12.4	12.4	12.2	11.6	12.5	12.3	7.6	44	
46	14.4	14.3	12.8	13.5	12.9	12.1	12.5	12.2	11.7	11.6	10.9	12.0	11.6	7.3	46	
48	13.6	12.8	11.9	12.2	12.2	11.4	11.8	11.1	11.1	11.0	10.3	10.9	10.9	7.0	48	
50	12.0	12.0	10.4	11.4	10.7	9.9	11.2	10.5	10.4	10.4	9.7	10.4	9.8	6.7	50	
52	11.1	10.8	9.5	10.4	9.9	9.1	10.1	10.0	9.6	9.7	9.0	9.7	9.0	6.4	52	
54	10.0	9.7	8.4	9.7	9.2	8.4	9.6	9.2	8.8	9.0	8.2	9.0	8.3	6.2	54	
56	9.0	8.7	7.3	8.8	8.3	7.5	8.8	8.2	7.9	8.3	7.5	8.3	7.5	5.9	56	
58	8.1	7.7	6.4	7.9	7.4	6.6	7.8	7.3	6.9	7.5	6.7	7.6	6.8	5.7	58	
60	7.2	6.9	5.5	7.0	6.5	5.7	7.0	6.4	6.1	6.8	6.0	6.8	6.0	5.5	60	
62	6.4	6.1	4.7	6.2	5.7	4.9	6.2	5.6	5.3	6.0	5.2	6.9	5.9	5.2	62	
64	5.6	5.3	4.0	5.5	4.9	4.2	5.4	4.8	4.5	5.8	4.9	6.1	5.2	4.6	64	
66	4.9	4.6	3.2	4.7	4.2	3.4	4.7	4.1	3.8	5.1	4.2	5.4	4.5	4.0	66	
68	4.2	3.9	2.6	4.1	3.6	2.8	4.0	3.5	3.1	4.4	3.6	4.7	3.8	3.8	68	
70	3.5	3.2		3.4	2.9	2.1	3.4	2.8	2.5	3.8	2.9	4.1	3.2	3.2	70	
72				2.8	2.3		2.8	2.2		3.2	2.4	3.5	2.6	2.6	72	
74				2.3			2.2			2.6		3.0	2.1	2.2	74	
76										2.1		2.4			76	
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code	
倍率 n	3	3	3	3	3	3	3	3	3	2	2	2	2	2	倍率 n	

起重性能表

Rated lifting load table




T 53.1~79.5 m

      															
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
	6.5m														
	0°														
	12 m														
12	51.4	51.7	52.1												12
14	48.0	48.1	48.5	47.1	47.5	47.9									14
16	44.9	44.8	45.2	43.1	43.2	43.6	39.4	39.4	39.9						16
18	41.0	41.2	41.5	39.9	39.7	40.0	36.1	36.2	36.8	38.0	38.0				18
20	37.7	38.0	38.2	36.4	36.5	36.7	31.2	31.3	31.7	32.0	33.4	25.0	30.0	27.5	20
22	34.6	34.9	35.2	32.8	33.2	33.1	29.4	30.1	29.6	27.5	28.3	24.6	27.6	27.0	22
24	30.9	31.0	31.2	29.7	29.8	29.6	27.0	27.7	27.5	24.9	26.5	24.3	25.7	16.8	24
26	28.6	28.6	28.7	28.8	28.9	27.5	24.4	26.5	25.8	23.6	24.7	23.0	24.0	16.0	26
28	28.1	27.4	26.7	26.6	25.9	25.8	23.9	24.7	24.3	23.0	23.3	21.4	22.5	15.1	28
30	26.6	26.6	25.1	25.7	25.0	24.2	23.0	22.8	22.8	21.6	22.0	20.3	21.0	14.3	30
32	25.3	25.3	23.7	23.6	23.6	22.8	22.1	21.4	21.4	20.4	20.6	19.5	19.8	13.6	32
34	23.2	23.2	21.6	23.0	22.2	21.5	21.0	21.0	20.3	19.4	19.4	18.1	18.7	13.0	34
36	21.6	20.8	20.0	20.8	20.8	20.0	19.9	19.1	19.1	19.2	18.4	17.1	17.5	12.4	36
38	20.0	19.2	18.4	19.2	18.4	18.4	18.9	18.1	18.1	18.2	17.4	16.7	16.4	11.9	38
40	17.6	17.6	16.8	17.6	16.8	16.8	17.6	16.8	16.8	17.2	16.4	16.2	15.5	11.4	40
42	16.8	16.0	15.2	16.0	16.0	15.2	16.0	15.2	15.2	16.0	15.2	15.2	14.6	10.9	42
44	15.2	15.2	13.6	15.2	14.4	13.6	14.4	14.4	13.6	15.2	14.4	14.5	13.8	10.4	44
46	13.6	13.6	12.0	13.6	12.8	12.6	13.6	12.8	12.8	13.6	12.8	13.3	12.5	10.0	46
48	12.7	12.3	10.9	12.6	12.0	11.2	12.0	12.0	11.2	12.8	12.0	11.6	10.9	9.8	48
50	11.4	11.0	9.6	11.2	10.7	9.9	11.2	10.4	10.3	11.2	10.4	10.9	10.1	9.2	50
52	10.2	9.9	8.4	10.1	9.6	8.7	10.1	9.5	9.2	10.4	9.6	10.3	9.4	8.8	52
54	9.1	8.8	7.3	9.0	8.5	7.6	9.0	8.4	8.1	9.5	8.6	9.4	8.6	8.1	54
56	8.1	7.7	6.3	8.0	7.5	6.6	8.0	7.4	7.1	8.5	7.6	8.6	7.8	7.5	56
58	7.1	6.8	5.3	7.1	6.5	5.7	7.1	6.5	6.1	7.6	6.7	8.0	7.0	6.8	58
60	6.2	5.9	4.5	6.2	5.6	4.8	6.2	5.6	5.3	6.7	5.8	7.1	6.2	5.6	60
62	5.4	5.1	3.6	5.4	4.8	4.0	5.4	4.8	4.5	5.9	5.0	6.3	5.4	4.8	62
64	4.6	4.3	2.9	4.6	4.1	3.2	4.7	4.1	3.7	5.2	4.3	5.6	4.6	4.2	64
66				3.9	3.3	2.5	4.0	3.4	3.0	4.5	3.5	4.9	3.9	3.6	66
68				3.2	2.7		3.3	2.7	2.3	3.8	2.9	4.2	3.2	3.0	68
70				2.5	2.0		2.6	2.1		3.2	2.3	3.6	2.6	2.4	70
72							2.0			2.6		3.0	2.0	1.9	72
74										2.0		2.4			74
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	4	4	4	4	4	4	3	3	3	3	3	2	3	3	倍率 n

起重性能表

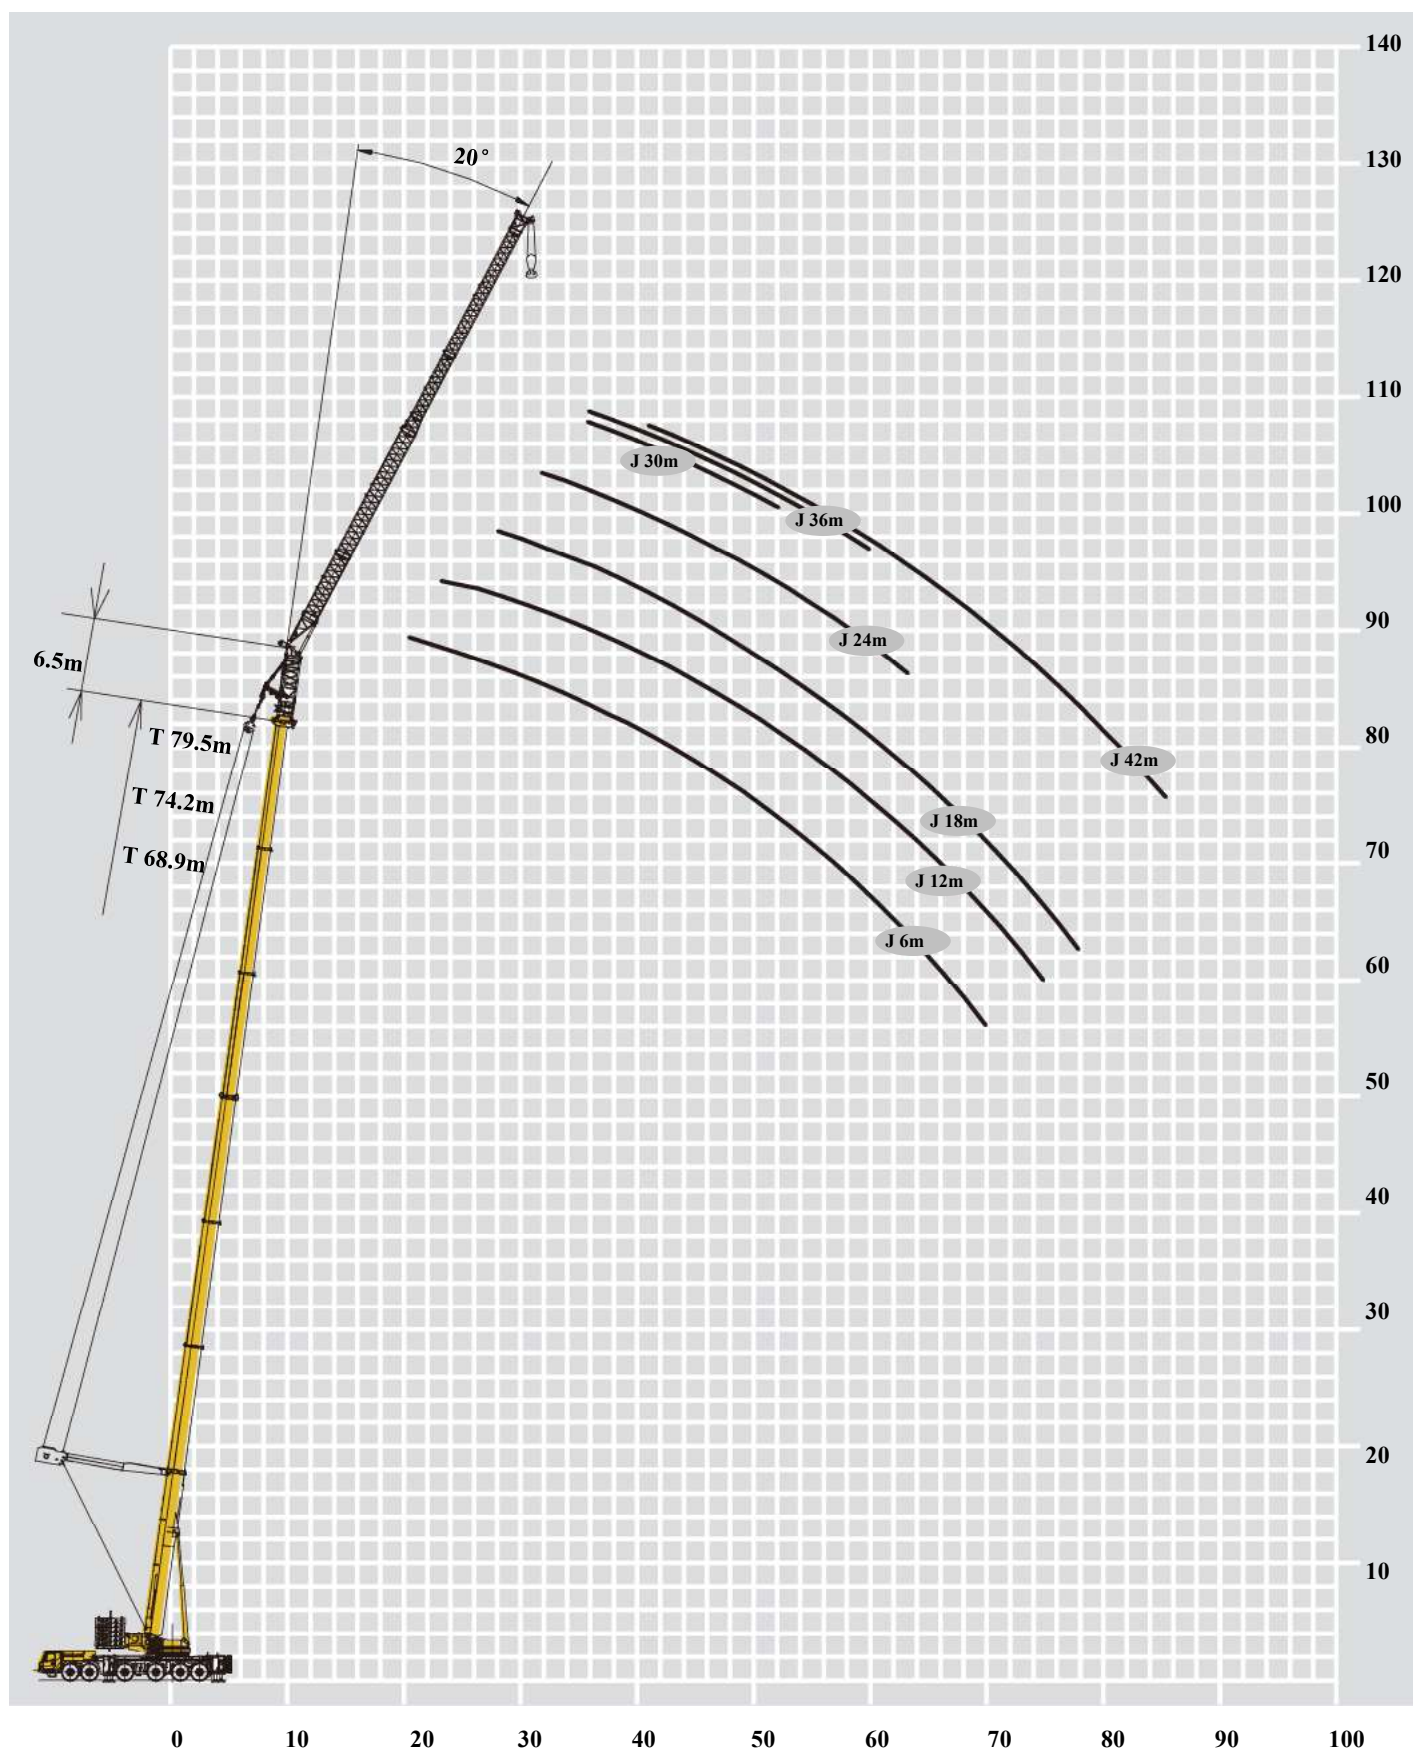
Rated lifting load table

T 53.1~79.5 m

      															
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
	6.5m														
	0°														
	6 m														
10	63.0	64.0	65.0												10
12	61.8	62.8	62.8	62.0	61.7	61.2									12
14	60.9	60.9	60.9	58.0	58.0	58.0	58.0	59.8	59.1						14
16	57.9	57.9	57.9	55.0	55.0	55.0	52.8	54.8	53.9	45.0	47.0				16
18	53.6	52.8	52.0	51.8	52.0	51.0	48.3	50.0	49.2	41.9	43.5	41.4	43.0		18
20	48.0	47.2	46.4	47.2	46.4	45.6	44.4	45.6	44.8	40.2	41.0	36.6	38.0	25.0	20
22	43.2	42.4	41.6	42.4	41.6	40.8	40.6	41.6	40.8	37.0	37.9	34.0	35.0	23.5	22
24	38.4	38.4	37.6	38.4	37.6	36.8	37.6	37.6	36.8	34.3	35.2	29.8	30.5	22.6	24
26	35.2	35.2	33.6	34.4	34.4	32.0	34.4	33.6	32.0	31.9	30.7	27.8	28.3	21.4	26
28	30.4	30.4	28.8	30.4	29.6	28.8	29.6	29.6	28.8	29.5	28.8	26.1	26.6	20.3	28
30	28.0	27.2	26.4	27.2	27.2	26.4	27.2	26.4	26.4	27.2	26.4	24.4	25.0	19.0	30
32	25.6	24.8	24.0	24.8	24.0	24.0	24.8	24.0	24.0	24.8	24.0	23.6	23.2	18.1	32
34	23.2	22.4	21.6	22.4	22.4	21.6	22.4	21.6	21.6	22.4	21.6	22.4	21.6	17.3	34
36	20.8	20.8	19.2	20.8	20.0	19.2	20.8	20.0	19.2	20.8	20.0	20.8	20.0	16.4	36
38	19.2	18.4	17.6	19.2	18.4	17.6	18.4	18.4	17.6	19.2	18.4	19.2	18.4	15.4	38
40	17.6	16.8	16.0	17.6	16.8	16.0	16.8	16.8	16.0	17.6	16.8	17.6	16.8	14.7	40
42	16.0	15.2	14.3	16.0	15.2	14.4	15.2	15.2	14.4	16.0	15.2	16.0	15.2	13.7	42
44	14.4	14.2	12.6	14.4	13.6	12.8	14.4	13.6	13.6	14.4	13.6	14.4	13.6	13.0	44
46	12.8	12.6	11.0	12.8	12.4	11.5	12.8	12.5	12.0	13.6	12.8	13.6	12.8	11.8	46
48	11.6	11.2	9.6	11.7	11.0	10.1	11.8	11.1	10.7	12.0	11.2	12.8	11.2	10.4	48
50	10.3	9.9	8.3	10.4	9.7	8.8	10.4	9.8	9.4	11.1	10.1	11.2	10.4	9.9	50
52	9.1	8.7	7.1	9.2	8.6	7.6	9.3	8.7	8.3	9.9	8.9	10.4	9.4	8.9	52
54	8.0	7.6	6.0	8.1	7.5	6.5	8.2	7.6	7.2	8.8	7.9	9.4	8.3	8.4	54
56	7.0	6.6	5.0	7.1	6.5	5.5	7.2	6.6	6.2	7.8	6.9	8.4	7.3	7.7	56
58	6.0	5.7	4.1	6.1	5.5	4.6	6.3	5.6	5.2	6.9	5.9	7.4	6.4	6.9	58
60	4.3	4.1	2.4	5.3	4.6	3.7	5.4	4.8	4.4	6.0	5.1	6.6	5.5	6.0	60
62				4.4	3.8	2.9	4.6	3.9	3.6	5.2	4.3	5.8	4.7	5.2	62
64				3.6	3.0	2.1	3.8	3.2	2.8	4.5	3.5	5.0	4.0	4.5	64
66							3.1	2.5	2.1	3.8	2.8	4.3	3.2	3.8	66
68							2.4			3.1	2.1	3.6	2.6	3.1	68
70										2.5		3.0	2.0	2.5	70
72												2.4		1.9	72
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	5	5	5	5	5	5	5	5	5	4	4	4	4	2	倍率 n

起升高度曲线图 Lifting height chart





主臂+超起+副臂
Boom+ Super lifting device + Jib



起重性能表

Rated lifting load table





T 53.1~68.9 m

      												
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	
	6.5m											
	20°											
	42 m											
32	5	5.1	5.1									32
34	4.8	4.9	5.0	4.9	4.9	4.9						34
36	4.6	4.7	4.8	4.7	4.7	4.7	4.8	4.9	4.9			36
38	4.5	4.5	4.6	4.5	4.5	4.6	4.7	4.7	4.7			38
40	4.3	4.3	4.4	4.4	4.4	4.4	4.5	4.5	4.5	4.6	4.5	40
42	4.1	4.1	4.2	4.2	4.2	4.3	4.3	4.3	4.3	4.4	4.4	42
44	4.0	4.0	4.0	4.1	4.1	4.1	4.2	4.2	4.2	4.3	4.2	44
46	3.9	3.8	3.8	4.0	3.9	4.0	4.0	4.0	4.0	4.1	4.2	46
48	3.7	3.7	3.7	3.8	3.8	3.9	3.9	3.9	3.9	4.0	4.0	48
50	3.6	3.6	3.6	3.7	3.7	3.7	3.8	3.8	3.8	3.9	3.8	50
52	3.5	3.5	3.5	3.6	3.5	3.6	3.7	3.7	3.7	3.8	3.7	52
54	3.4	3.4	3.4	3.5	3.4	3.5	3.6	3.6	3.6	3.7	3.6	54
56	3.3	3.3	3.2	3.3	3.3	3.4	3.5	3.5	3.5	3.6	3.5	56
58	3.2	3.2	3.1	3.2	3.2	3.2	3.4	3.4	3.4	3.5	3.4	58
60	3.1	3.1	3.0	3.1	3.1	3.1	3.3	3.3	3.3	3.4	3.3	60
62	3.0	3.0	3.0	3.0	3.0	3.0	3.2	3.2	3.2	3.3	3.3	62
64	2.9	2.9	2.9	3.0	3.0	3.0	3.1	3.1	3.1	3.2	3.2	64
66	2.8	2.8	2.8	2.9	2.9	2.9	3.0	3.0	3.0	3.2	3.1	66
68	2.7	2.7	2.7	2.8	2.8	2.8	3.0	2.9	2.9	3.1	3.0	68
70	2.7	2.6	2.6	2.7	2.7	2.7	2.9	2.9	2.9	3.0	3.0	70
72	2.6	2.6	2.6	2.7	2.7	2.7	2.8	2.8	2.8	3.0	2.9	72
74	2.5	2.5	2.5	2.6	2.6	2.6	2.8	2.7	2.7	2.9	2.8	74
76	2.4	2.4	2.4	2.5	2.5	2.5	2.7	2.7	2.7	2.8	2.8	76
78	2.4	2.4	2.4	2.5	2.5	2.5	2.6	2.6	2.6	2.7	2.7	78
80	2.3	2.3	2.3	2.4	2.4	2.4	2.6	2.6	2.6	2.7	2.7	80
82	2.3	2.2	2.3	2.4	2.4	2.4	2.5	2.5	2.5	2.6	2.6	82
84	2.2	2.2	2.2	2.3	2.3	2.2	2.4	2.4	2.4	2.6	2.6	84
86	2.2	2.2		2.3	2.3		2.4	2.1		2.5	2.1	86
88	2.1	2.1		2.1			2.0			2.2		88
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	组合 Code
倍率 n	1	1	1	1	1	1	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table




T 53.1~74.2 m

      														
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	
	6.5m													
	20°													
	36 m													
30	6.7	6.7	6.8	6.8	6.8	6.8								30
32	6.4	6.4	6.5	6.6	6.6	6.6	6.7	6.6	6.6					32
34	6.2	6.2	6.3	6.3	6.3	6.3	6.4	6.4	6.5	6.5	6.4			34
36	6.0	6.0	6.0	6.1	6.1	6.1	6.2	6.1	6.2	6.3	6.2	6.4	6.4	36
38	5.8	5.8	5.8	5.9	5.8	5.9	6.0	5.9	6.0	6.1	6.0	6.3	6.2	38
40	5.6	5.6	5.6	5.7	5.6	5.7	5.8	5.7	5.8	5.9	5.8	6.1	6.0	40
42	5.4	5.3	5.4	5.5	5.4	5.5	5.6	5.6	5.6	5.7	5.7	5.9	5.8	42
44	5.2	5.1	5.2	5.3	5.3	5.3	5.4	5.4	5.5	5.5	5.6	5.2	5.2	44
46	5.0	5.0	5.0	5.1	5.1	5.1	5.3	5.3	5.3	5.3	5.4	4.6	4.5	46
48	4.9	4.8	4.9	5.0	4.9	5.0	5.1	5.1	5.2	5.2	5.3	4.1	4.1	48
50	4.7	4.7	4.7	4.8	4.8	4.8	5.0	5.0	5.0	5.1	5.1	3.7	3.6	50
52	4.6	4.6	4.6	4.7	4.7	4.7	4.9	4.9	4.9	4.9	5.0	3.2	3.2	52
54	4.4	4.4	4.5	4.6	4.5	4.6	4.7	4.7	4.7	4.9	4.9	2.8	2.7	54
56	4.3	4.3	4.3	4.4	4.4	4.4	4.6	4.6	4.6	4.7	4.8	2.2	2.2	56
58	4.2	4.2	4.2	4.3	4.3	4.3	4.5	4.5	4.5	4.6	4.6	2.0	2.0	58
60	4.1	4.1	4.1	4.2	4.2	4.2	4.4	4.4	4.4	4.5	4.5	1.9		60
62	4.0	4.0	4.0	4.1	4.1	4.1	4.3	4.2	4.3	4.4	4.4			62
64	3.9	3.9	3.9	4.0	4.0	4.0	4.2	4.1	4.2	4.3	4.4			64
66	3.8	3.7	3.8	3.9	3.9	3.9	4.1	4.0	4.1	4.3	4.3			66
68	3.6	3.7	3.7	3.8	3.8	3.8	4.0	4.0	4.0	4.2	4.2			68
70	3.6	3.6	3.6	3.8	3.8	3.8	3.9	3.9	3.9	4.1	4.1			70
72	3.5	3.5	3.5	3.7	3.7	3.7	3.8	3.8	3.8	4.0	3.9			72
74	3.4	3.4	3.4	3.6	3.6	3.6	3.7	3.7	3.7	3.9	3.9			74
76	3.4	3.4	3.4	3.5	3.5	3.5	3.7	3.7	3.7	3.9	3.8			76
78	3.3	3.3	3.0	3.5	3.5	3.1	3.6	3.6	3.3	3.7	3.6			78
80	3.3	3.3	2.4	3.4	3.1	2.5	3.4	3.0	2.8	3.7	3.0			80
82	3.1	2.9		3.0	2.6	2.0	2.9	2.5	2.2	3.1	2.5			82
84	2.5	2.3		2.5	2.1		2.4	2.0		2.6	2.0			84
86	2.0									2.2				86
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	组合 Code
倍率 n	1	1	1	1	1	1	1	1	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table




T 53.1~79.5 m

      															
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
	6.5m														
	20°														
	30 m														
26	8.6	8.6	8.6												26
28	8.2	8.2	8.2	8.3	8.4	8.4	8.5	8.5	8.5						28
30	7.9	7.9	8.0	8.1	8.1	8.0	8.2	8.2	8.2						30
32	7.6	7.6	7.7	7.7	7.8	7.8	7.9	7.9	8.0	8.0	8.2				32
34	7.3	7.3	7.4	7.5	7.6	7.5	7.6	7.7	7.7	7.8	7.8	8.0	8.1		34
36	7.1	7.1	7.2	7.3	7.2	7.3	7.4	7.4	7.5	7.6	7.6	7.8	7.9	5.1	36
38	6.9	6.9	7.0	7.1	7.0	7.0	7.2	7.2	7.2	7.4	7.4	7.6	7.5	4.7	38
40	6.6	6.7	6.7	6.8	6.8	6.8	7.0	7.0	7.0	7.1	7.2	7.4	7.3	4.3	40
42	6.4	6.4	6.5	6.6	6.6	6.6	6.8	6.8	6.8	6.9	7.0	7.2	7.1	3.9	42
44	6.2	6.2	6.3	6.4	6.4	6.4	6.6	6.6	6.6	6.7	6.8	6.9	6.8	3.5	44
46	6.0	6.0	6.1	6.2	6.2	6.2	6.4	6.4	6.4	6.5	6.6	6.7	6.6	3.0	46
48	5.9	5.9	5.9	6.1	6.0	6.0	6.2	6.3	6.2	6.5	6.5	6.4	6.4	2.6	48
50	5.7	5.7	5.8	5.9	5.9	5.9	6.1	6.1	6.1	6.3	6.3	6.2	6.2	2.2	50
52	5.6	5.6	5.6	5.7	5.7	5.7	5.9	6.0	6.0	6.1	6.2	6.0	6.0	1.8	52
54	5.4	5.4	5.4	5.6	5.6	5.6	5.8	5.8	5.8	6.0	6.0	5.9	5.8		54
56	5.3	5.3	5.3	5.5	5.5	5.5	5.7	5.7	5.7	5.9	5.9	5.6	5.6		56
58	5.2	5.2	5.2	5.4	5.3	5.4	5.6	5.6	5.6	5.8	5.8	5.4	5.3		58
60	5.1	5.1	5.1	5.2	5.2	5.2	5.4	5.5	5.5	5.6	5.7	4.9	4.9		60
62	5.0	5.0	5.0	5.2	5.1	5.1	5.3	5.3	5.3	5.6	5.5	4.6	4.5		62
64	4.9	4.9	4.9	5.0	5.0	5.0	5.2	5.2	5.2	5.4	5.4	4.5	4.4		64
66	4.8	4.8	4.8	4.9	4.9	4.9	5.1	5.1	5.1	5.4	5.3	4.1	4.0		66
68	4.7	4.7	4.7	4.8	4.8	4.8	5.1	5.0	5.0	5.2	5.2	3.7	3.6		68
70	4.6	4.6	4.6	4.7	4.8	4.8	5.0	4.9	4.9	5.1	5.1	3.2	3.1		70
72	4.5	4.5	4.0	4.7	4.7	4.2	4.8	4.7	4.5	5.0	4.8	3.1	3.0		72
74	4.4	4.4	3.4	4.6	4.2	3.5	4.5	4.1	3.8	4.8	4.1	3.1	2.7		74
76	4.0	3.8	2.7	4.0	3.5	2.9	3.9	3.5	3.2	4.2	3.5	2.7	2.3		76
78	3.4	3.2	2.1	3.4	2.9	2.3	3.3	2.9	2.6	3.6	3.0	2.7	2.2		78
80	2.8	2.6		2.8	2.4		2.8	2.3	2.0	3.1	2.4	2.7	2.1		80
82	2.2	2.0		2.2			2.2			2.6		2.7	2.0		82
84										2.1		2.3			84
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	1	1	1	1	1	1	1	1	1	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table






T 53.1~79.5 m

53.1-79.5 m 6.5 m 24 m 9.4×9.6 m 360° 143 t SL															
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
	6.5m														
	20°														
	24 m														
22	11.9	11.9	11.9												22
24	11.5	11.5	11.5	11.5	11.7	11.7									24
26	11.1	11.1	11.1	11.1	11.3	11.3	11.4	11.5	11.5	11.6	11.6				26
28	10.9	10.9	10.9	10.9	11.0	10.9	11.0	11.1	11.1	11.3	11.2				28
30	10.7	10.7	10.8	10.8	10.8	10.8	10.8	10.8	10.8	11.0	11.0	11.2	11.2		30
32	10.4	10.4	10.4	10.7	10.6	10.7	10.8	10.8	10.8	10.8	10.8	11.0	10.9	6.5	32
34	10.0	10.0	10.0	10.3	10.2	10.3	10.5	10.4	10.5	10.7	10.7	10.6	10.5	6.3	34
36	9.7	9.7	9.6	10.0	9.9	10.0	10.1	10.2	10.2	10.4	10.4	10.2	10.2	6.0	36
38	9.4	9.4	9.4	9.7	9.6	9.7	9.9	9.8	9.9	10.2	10.1	9.7	9.6	5.8	38
40	9.1	9.1	9.2	9.4	9.3	9.4	9.7	9.6	9.6	9.8	9.8	9.4	9.2	5.5	40
42	8.8	8.8	8.8	9.2	9.1	9.2	9.5	9.4	9.4	9.6	9.6	8.9	8.9	5.3	42
44	8.5	8.5	8.6	8.9	8.9	9.0	9.1	9.2	9.2	9.4	9.4	8.6	8.7	5.0	44
46	8.3	8.3	8.4	8.6	8.7	8.7	8.9	8.8	8.9	9.2	9.2	8.3	8.3	4.8	46
48	8.1	8.1	8.2	8.4	8.5	8.3	8.7	8.6	8.7	9.0	9.0	8.3	8.1	4.6	48
50	7.9	7.9	8.0	8.2	8.2	8.1	8.5	8.4	8.5	8.8	8.8	8.0	7.8	4.3	50
52	7.7	7.7	7.7	8.0	8.0	8.0	8.3	8.2	8.3	8.6	8.6	7.8	7.6	3.9	52
54	7.5	7.5	7.5	7.8	7.8	7.8	8.1	8.2	8.1	8.4	8.4	7.5	7.3	3.6	54
56	7.4	7.4	7.3	7.6	7.7	7.6	8.0	8.0	7.9	8.2	8.2	7.2	7.1	3.2	56
58	7.2	7.2	7.3	7.5	7.5	7.5	7.8	7.8	7.7	8.2	8.2	7.1	6.9	2.8	58
60	7.1	7.1	7.1	7.4	7.4	7.4	7.6	7.6	7.7	8.0	8.0	6.4	6.3	2.6	60
62	6.9	6.9	6.9	7.2	7.2	7.0	7.5	7.5	7.3	7.8	7.7	6.0	5.7	2.1	62
64	6.9	6.9	6.0	7.1	6.8	6.2	7.3	6.8	6.5	7.6	6.9	6.0	5.5		64
66	6.6	6.3	5.2	6.5	6.0	5.4	6.5	6.0	5.7	6.8	6.1	5.8	5.2		66
68	5.8	5.5	4.4	5.7	5.3	4.6	5.7	5.2	4.9	6.1	5.3	4.8	4.2		68
70	5.1	4.8	3.6	5.0	4.6	3.9	5.0	4.5	4.2	5.4	4.6	4.2	3.6		70
72	4.4	4.1	2.9	4.3	3.9	3.2	4.3	3.9	3.6	4.7	4.0	4.1	3.4		72
74	3.7	3.4	2.2	3.7	3.2	2.5	3.7	3.2	2.9	4.1	3.3	3.3	2.7		74
76	3.0	2.7		3.1	2.6		3.1	2.6	2.3	3.5	2.7	2.8	2.2		76
78				2.5	2.0		2.5	2.0		2.9	2.2	2.4			78
80							2.0			2.4		1.9			80
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	1	1	1	1	1	1	1	1	1	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table




T 53.1~79.5 m

															
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
	6.5m														
	20°														
	18 m														
18	16.7	16.7	16.7												18
20	16.0	16.0	15.9	16.2	16.2	16.2									20
22	15.2	15.4	15.3	15.7	15.7	15.8	16.1	16.0	16.0						22
24	14.8	14.8	14.7	15.0	15.0	15.1	15.6	15.5	15.5	15.9	15.8				24
26	14.2	14.2	14.3	14.6	14.5	14.6	14.9	14.8	14.9	15.5	15.3	16.1	15.7		26
28	13.8	13.8	13.8	14.2	14.1	14.2	14.5	14.4	14.5	14.9	14.8	15.7	15.4	9.2	28
30	13.4	13.4	13.3	13.6	13.7	13.7	14.1	14.1	14.1	14.3	14.3	15.2	14.8	8.9	30
32	12.8	13.0	13.0	13.2	13.4	13.2	13.5	13.7	13.7	13.9	14.0	14.5	14.3	8.6	32
34	12.4	12.6	12.6	12.8	13.0	12.8	13.1	13.3	13.3	13.5	13.6	13.8	13.7	8.3	34
36	12.0	12.2	12.2	12.5	12.6	12.5	12.7	12.9	12.9	13.1	13.2	13.3	13.2	7.9	36
38	11.8	11.8	11.8	12.2	12.2	12.2	12.5	12.5	12.5	12.9	12.9	12.9	12.8	7.6	38
40	11.4	11.4	11.5	11.9	11.9	11.8	12.3	12.3	12.3	12.7	12.7	12.7	12.5	7.3	40
42	11.2	11.2	11.2	11.6	11.6	11.5	12.0	11.9	11.9	12.5	12.4	12.4	12.1	7.0	42
44	11.0	11.0	10.9	11.3	11.3	11.3	11.7	11.7	11.7	12.2	12.1	12.0	11.7	6.7	44
46	10.9	10.9	10.8	11.1	11.1	11.1	11.3	11.5	11.3	11.5	11.6	11.7	11.3	6.4	46
48	10.8	10.8	10.8	11.0	11.0	11.0	11.1	11.1	11.1	11.1	11.1	11.3	10.9	6.2	48
50	10.8	10.8	10.7	10.9	10.9	10.9	11.0	10.9	11.0	9.5	9.5	9.7	9.4	6.0	50
52	10.4	10.6	10.5	10.8	10.8	10.8	10.9	10.8	10.9	9.1	9.1	8.8	8.8	5.7	52
54	10.4	10.2	9.6	10.7	10.4	9.9	10.8	10.4	10.3	9.0	8.6	8.7	8.4	5.5	54
56	10.1	9.8	8.5	10.0	9.5	8.8	10.0	9.5	9.2	8.8	8.1	8.7	8.0	5.3	56
58	9.0	8.8	7.5	9.0	8.5	7.8	9.0	8.5	8.2	8.4	7.7	8.2	7.5	5.1	58
60	8.1	7.8	6.5	8.0	7.6	6.8	8.1	7.5	7.2	8.1	7.3	7.8	7.1	5.0	60
62	7.2	6.9	5.6	7.2	6.7	5.9	7.2	6.6	6.3	7.6	6.8	7.6	6.8	4.8	62
64	6.3	6.0	4.7	6.3	5.8	5.1	6.3	5.8	5.5	6.8	6.0	6.8	6.0	4.6	64
66	5.5	5.2	3.9	5.5	5.0	4.3	5.6	5.0	4.7	6.0	5.2	6.1	5.3	4.4	66
68	4.7	4.4	3.1	4.8	4.3	3.5	4.8	4.3	4.0	5.3	4.5	5.3	4.5	3.9	68
70	4.0	3.7	2.4	4.1	3.5	2.8	4.1	3.6	3.3	4.6	3.8	5.0	4.1	3.7	70
72				3.4	2.9	2.1	3.5	2.9	2.6	3.9	3.1	4.3	3.4	3.1	72
74				2.7	2.2		2.8	2.3	2.0	3.3	2.5	3.7	2.8	2.6	74
76				2.1			2.2			2.7		3.1	2.2	2.0	76
78										2.2		2.6		2.0	78
80												2.0			80
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	2	2	2	2	2	2	2	2	2	2	2	2	2	1	倍率 n

起重性能表

Rated lifting load table




T 53.1~79.5 m

      															
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
	6.5m														
	20°														
	12 m														
16	27.2	27.2	27.7	27.5	27.4	27.5									16
18	26.4	26.4	26.6	26.4	26.6	26.7	26.5	26.5	26.5						18
20	25.3	25.2	25.4	25.5	25.6	25.7	25.4	25.6	25.7	24.8	25.1				20
22	24.5	24.4	24.6	24.4	24.7	24.8	24.6	24.5	24.6	24.0	24.4	20.0	21.0		22
24	23.7	23.7	23.8	23.5	23.9	23.8	23.9	23.8	23.8	23.1	23.2	19.0	19.8		24
26	22.5	22.9	22.7	22.7	23.1	22.8	23.1	23.0	23.1	22.4	22.3	18.3	18.8	14.0	26
28	21.7	22.1	21.8	22.0	22.3	22.2	22.3	22.3	22.3	21.3	21.5	17.7	18.0	12.9	28
30	21.3	21.3	21.4	21.4	21.7	21.6	21.3	21.6	21.7	20.0	20.3	17.1	17.4	12.4	30
32	20.9	20.9	20.7	21.0	21.2	21.1	20.5	20.5	20.5	19.0	19.2	16.3	16.7	11.9	32
34	20.1	20.1	20.2	20.3	20.5	20.4	19.5	19.5	19.5	18.1	18.3	15.4	16.1	11.3	34
36	19.7	19.7	19.8	19.2	19.4	19.2	18.0	18.3	18.4	17.2	17.4	15.1	15.6	10.9	36
38	18.9	18.9	19.1	18.4	18.3	18.1	17.9	17.8	17.5	16.3	16.6	13.9	14.5	10.5	38
40	18.5	18.5	17.6	17.9	17.9	17.2	17.5	17.5	16.7	15.7	15.8	13.5	13.8	10.0	40
42	17.6	17.6	16.0	17.6	16.8	16.0	16.7	16.7	15.9	15.6	15.1	12.8	13.1	9.3	42
44	16.0	16.0	14.4	16.0	15.2	14.4	14.3	13.6	13.6	13.6	12.9	12.6	12.4	8.9	44
46	14.4	14.4	13.4	14.4	14.4	13.6	13.6	12.8	12.8	13.0	12.2	11.9	11.6	8.6	46
48	13.6	13.3	11.9	13.6	12.8	12.0	12.3	12.3	12.2	12.4	11.7	11.6	11.0	8.3	48
50	12.0	11.9	10.6	12.0	11.7	10.9	12.0	11.8	11.2	11.1	11.1	10.5	9.8	8.0	50
52	11.0	10.7	9.3	11.0	10.4	9.6	11.1	10.4	10.2	11.2	10.4	9.9	9.1	7.7	52
54	9.8	9.5	8.1	9.9	9.3	8.5	9.9	9.3	9.0	10.4	9.6	9.1	8.4	7.5	54
56	8.7	8.4	7.0	8.8	8.2	7.4	8.8	8.3	7.9	9.4	8.5	8.4	7.7	7.2	56
58	7.7	7.4	6.0	7.8	7.2	6.4	7.9	7.3	6.9	8.4	7.5	7.8	7.0	7.0	58
60	6.7	6.4	5.0	6.8	6.3	5.5	6.9	6.3	6.0	7.4	6.6	7.2	6.3	6.3	60
62	5.8	5.5	4.1	5.9	5.4	4.6	6.1	5.5	5.1	6.6	5.7	6.5	5.6	5.4	62
64	5.0	4.6	3.2	5.1	4.6	3.7	5.2	4.7	4.3	5.8	4.9	5.8	4.9	4.7	64
66				4.3	3.8	2.9	4.5	3.9	3.5	5.0	4.2	5.1	4.2	4.0	66
68				3.6	3.0	2.2	3.7	3.2	2.8	4.3	3.4	4.6	3.7	3.7	68
70				2.8	2.3		3.0	2.5	2.1	3.6	2.8	3.9	3.0	3.0	70
72							2.4			3.0	2.1	3.2	2.3	2.3	72
74										2.4		2.9		2.0	74
76												2.3			76
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	3	3	3	3	3	3	2	2	2	2	2	2	2	2	倍率 n

起重性能表

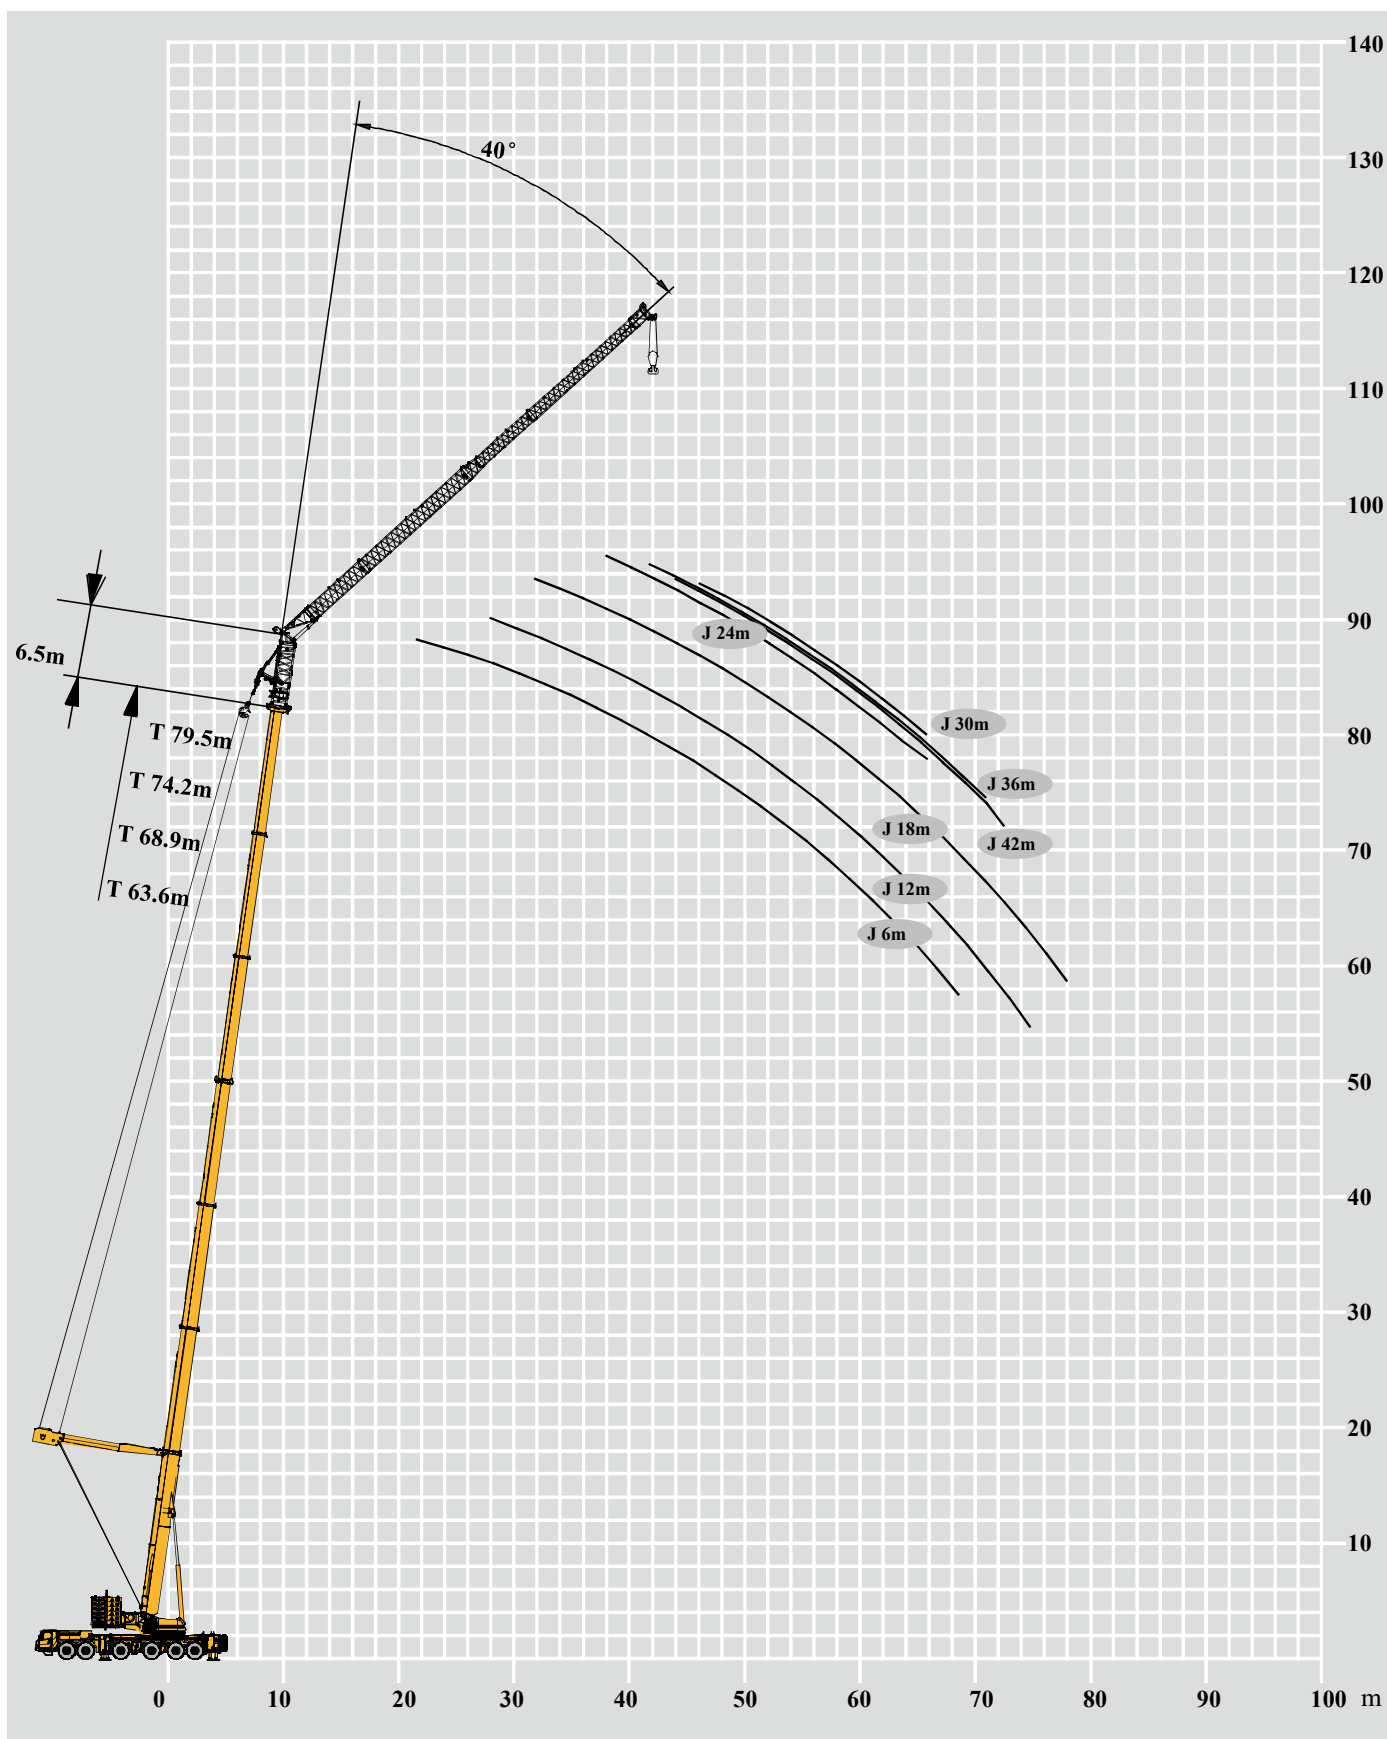
Rated lifting load table

T 53.1~79.5 m

      															
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
	6.5m														
	20°														
	6 m														
12	36.8	36.8	36.9												12
14	35.3	35.2	35.4	35.3	35.3	35.4									14
16	33.7	33.8	33.9	33.8	33.8	33.9	33.8	33.9	34.0	33.3	33.8				16
18	32.3	32.5	32.4	32.6	33.0	33.1	32.7	32.5	32.7	32.4	32.7	29.0	29.0		18
20	31.1	31.1	31.2	31.5	31.5	31.6	31.6	31.5	31.5	30.5	31.1	28.0	28.0	24.0	20
22	29.9	30.0	30.1	30.3	30.7	30.4	30.4	30.7	30.8	28.7	29.2	25.7	26.3	21.0	22
24	28.8	29.1	28.9	29.5	29.5	29.5	28.9	29.1	29.2	27.1	27.3	24.1	24.5	19.3	24
26	28.1	28.0	28.1	28.0	28.3	28.0	27.2	27.2	27.3	25.6	25.8	22.7	23.1	18.2	26
28	27.3	27.3	27.4	26.4	26.5	26.5	25.3	25.6	25.7	24.1	24.3	21.2	21.7	17.2	28
30	26.5	26.5	26.6	24.9	24.9	25.0	23.9	24.2	24.2	22.9	22.9	19.9	20.3	16.5	30
32	25.0	25.0	24.8	23.5	23.5	22.8	23.6	22.8	22.8	22.4	21.8	18.7	19.1	15.8	32
34	23.5	23.2	22.4	22.2	22.2	21.4	22.3	21.6	21.6	21.4	20.6	18.2	18.0	15.1	34
36	20.8	20.8	20.0	20.2	19.5	18.7	18.9	18.9	18.2	18.7	18.0	17.5	16.9	14.5	36
38	19.7	19.2	18.4	18.3	18.3	17.5	18.6	17.8	17.8	17.8	17.0	16.5	15.9	14.0	38
40	17.6	17.6	16.0	17.1	17.1	16.4	17.6	16.8	16.8	16.8	16.0	15.4	14.7	13.5	40
42	16.8	16.0	15.0	15.6	15.6	14.8	16.0	15.2	15.2	14.8	14.8	14.7	14.0	13.0	42
44	15.1	14.3	13.1	14.6	13.8	13.0	13.5	13.5	12.8	13.7	13.0	13.3	12.6	12.3	44
46	13.5	13.1	11.6	13.6	12.8	12.0	13.3	12.7	12.7	13.0	12.2	11.9	11.2	10.4	46
48	12.0	11.7	10.1	12.0	11.6	10.6	12.0	11.7	11.2	12.2	11.4	11.2	10.5	9.5	48
50	10.6	10.3	8.7	10.8	10.2	9.3	11.0	10.3	10.0	11.2	10.4	9.8	9.1	8.8	50
52	9.3	9.0	7.4	9.6	9.0	8.1	9.8	9.1	8.7	10.4	9.4	9.3	8.4	7.6	52
54	8.2	7.8	6.3	8.5	7.9	6.9	8.6	8.0	7.6	9.3	8.3	8.4	7.7	7.1	54
56	7.1	6.7	5.2	7.4	6.8	5.9	7.6	7.0	6.6	8.2	7.3	7.9	7.0	6.3	56
58	6.0	5.7	4.2	6.4	5.8	4.9	6.6	6.0	5.6	7.3	6.3	7.3	6.3	5.7	58
60				5.5	4.9	4.0	5.7	5.1	4.7	6.4	5.4	6.6	5.6	5.0	60
62				4.6	4.0	3.1	4.9	4.2	3.8	5.5	4.6	5.9	4.9	4.8	62
64				3.8	3.2	2.3	4.1	3.4	3.0	4.7	3.8	5.2	4.2	4.1	64
66							3.3	2.7	2.3	4.0	3.1	4.5	3.5	3.4	66
68							2.6	2.0		3.3	2.4	3.9	2.9	3.0	68
70										2.6		3.2	2.2	2.4	70
72										2.0		2.6			72
74												2.0			74
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	3	3	3	3	3	3	3	3	3	3	3	3	3	2	倍率 n

起升高度曲线图 Lifting height chart




主臂+超起+副臂
Boom+ Super lifting device + Jib



起重性能表

Rated lifting load table

T 53.1~63.6 m

      										
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	
	6.5m									
	40°									
	42 m									
44	2.9	2.9	2.9	2.9	2.9	2.9				44
46	2.8	2.8	2.8	2.8	2.8	2.8	2.9	2.9	2.9	46
48	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	48
50	2.7	2.7	2.7	2.7	2.7	2.7	2.8	2.8	2.8	50
52	2.6	2.6	2.6	2.6	2.6	2.6	2.7	2.7	2.7	52
54	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	54
56	2.5	2.5	2.5	2.5	2.5	2.5	2.6	2.6	2.6	56
58	2.4	2.4	2.4	2.5	2.5	2.5	2.5	2.5	2.5	58
60	2.4	2.3	2.4	2.4	2.4	2.4	2.5	2.5	2.5	60
62	2.3	2.3	2.3	2.4	2.4	2.4	2.4	2.4	2.4	62
64	2.3	2.3	2.3	2.3	2.3	2.3	2.4	2.4	2.4	64
66	2.2	2.2	2.2	2.3	2.3	2.3	2.4	2.3	2.4	66
68	2.2	2.2	2.2	2.3	2.3	2.3	2.3	2.3	2.3	68
70	2.2	2.2	2.2	2.2	2.2	2.2	2.3	2.3	2.3	70
72	2.1	2.1	2.1	2.2	2.2	2.2	2.3	2.2	2.2	72
74	2.1	2.1	2.1	2.2	2.2	2.2	2.2	2.2	2.2	74
76	2.1	2.1	2.1	2.1	2.1	2.1	2.2	2.2	2.2	76
78	2.1	2.1	2.1	2.1	2.1	2.1	2.2	2.2	2.2	78
80	2.1	2.1	2.0	2.1	2.1	2.1	2.1	2.1	2.1	80
82	2.0	2.0	2.0	2.1	2.1	2.1	2.1	2.1	2.1	82
84	2.0	2.0	2.0	2.1	2.1	2.1	2.1	2.1	2.1	84
86				2.1	2.1	2.1	2.1	2.1	2.1	86
88				2.1	2.1		2.1	2.1	2.1	88
90							2.1			90
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	组合 Code
倍率 n	1	1	1	1	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table

T 53.1~68.9 m




	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	
	6.5m											
	40°											
	36 m											
38	4.2	4.2	4.2									38
40	4.1	4.1	4.1	4.2	4.2	4.2						40
42	4.0	4.0	4.0	4.1	4.1	4.1	4.1	4.1	4.1			42
44	3.9	3.9	3.9	4.0	4.0	4.0	4.0	4.0	4.0	4.1	4.1	44
46	3.8	3.8	3.8	3.9	3.9	3.9	3.9	3.9	3.9	4.0	4.0	46
48	3.7	3.7	3.7	3.8	3.8	3.8	3.8	3.8	3.8	3.9	3.9	48
50	3.6	3.7	3.6	3.8	3.8	3.8	3.8	3.8	3.8	3.7	3.7	50
52	3.6	3.6	3.6	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	52
54	3.5	3.5	3.5	3.6	3.6	3.6	3.7	3.7	3.7	3.7	3.7	54
56	3.5	3.5	3.5	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	56
58	3.4	3.4	3.4	3.5	3.5	3.5	3.5	3.5	3.5	3.6	3.6	58
60	3.4	3.4	3.3	3.4	3.5	3.4	3.5	3.5	3.5	3.6	3.6	60
62	3.3	3.3	3.3	3.4	3.4	3.4	3.4	3.4	3.4	3.5	3.5	62
64	3.3	3.3	3.3	3.4	3.4	3.4	3.4	3.4	3.4	3.1	3.1	64
66	3.2	3.2	3.2	3.3	3.3	3.3	3.4	3.4	3.4	2.9	2.9	66
68	3.2	3.2	3.2	3.2	3.2	3.3	3.3	3.3	3.3	2.7	2.7	68
70	3.2	3.2	3.2	3.2	3.2	3.2	3.3	3.3	3.3	2.3	2.3	70
72	3.1	3.1	3.1	3.2	3.2	3.2	3.3	3.3	3.3	1.9	1.9	72
74	3.1	3.1	3.1	3.2	3.2	3.2	3.2	3.2	3.2	1.9		74
76	3.1	3.1	3.1	3.2	3.1	3.1	3.2	3.2	3.2			76
78	3.1	3.1	3.1	3.1	3.1	3.1	3.2	3.2	3.2			78
80				3.1	3.1	3.1	3.2	3.2	3.2			80
82				3.1	3.1	2.6	3.2	3.2	3.0			82
84							3.0	2.6	2.4			84
86							2.4	2.0				86
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	组合 Code
倍率 n	1	1	1	1	1	1	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table


T 53.1~74.2 m

      														
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	
	6.5m													
	40°													
	30 m													
32	5.6	5.6	5.6											32
34	5.4	5.4	5.4	5.5	5.5	5.5								34
36	5.3	5.4	5.3	5.4	5.4	5.4	5.5	5.5	5.5					36
38	5.2	5.2	5.2	5.3	5.3	5.3	5.4	5.4	5.4	5.4	5.4			38
40	5.1	5.1	5.1	5.2	5.2	5.2	5.3	5.3	5.3	5.3	5.3			40
42	5.0	5.0	5.0	5.1	5.1	5.1	5.2	5.2	5.2	5.2	5.2	5.5	5.4	42
44	4.9	4.9	4.9	5.0	5.0	5.0	5.1	5.1	5.1	5.1	5.1	5.4	5.3	44
46	4.8	4.8	4.8	4.9	4.9	5.0	5.0	5.0	5.0	5.1	5.1	5.3	5.2	46
48	4.8	4.8	4.8	4.8	4.8	4.9	5.0	5.0	5.0	5.0	5.0	5.1	5.1	48
50	4.7	4.7	4.7	4.7	4.7	4.8	4.9	4.9	4.9	4.9	4.9	5.1	5.0	50
52	4.6	4.6	4.6	4.7	4.7	4.7	4.8	4.8	4.8	4.9	4.9	4.9	4.8	52
54	4.5	4.5	4.5	4.6	4.6	4.7	4.8	4.8	4.7	4.8	4.8	4.6	4.6	54
56	4.5	4.5	4.5	4.6	4.6	4.5	4.7	4.7	4.7	4.8	4.8	4.3	4.3	56
58	4.4	4.4	4.4	4.5	4.5	4.5	4.6	4.6	4.6	4.7	4.7	3.9	3.8	58
60	4.4	4.4	4.4	4.4	4.4	4.4	4.6	4.6	4.6	4.7	4.7	3.5	3.4	60
62	4.3	4.3	4.3	4.4	4.4	4.4	4.5	4.5	4.5	4.6	4.6	3.1	3.0	62
64	4.3	4.3	4.3	4.4	4.4	4.4	4.5	4.5	4.5	4.6	4.6	3.0	3.0	64
66	4.3	4.3	4.3	4.3	4.3	4.3	4.5	4.4	4.5	4.6	4.5	2.6	2.5	66
68	4.3	4.3	4.3	4.3	4.3	4.3	4.4	4.4	4.4	4.5	4.5	2.3	2.3	68
70	4.2	4.2	4.2	4.3	4.3	4.3	4.4	4.4	4.4	4.5	4.5	2.1	2.1	70
72	4.2	4.2	4.2	4.3	4.3	4.3	4.4	4.4	4.4	4.5	4.5	2.0		72
74				4.3	4.3	4.2	4.4	4.3	4.3	4.5	4.4			74
76				4.3	4.1	3.5	4.4	4.2	3.9	4.5	4.4			76
78							3.9	3.5	3.2	4.3	3.7			78
80							3.3	2.8	2.6	3.7	3.1			80
82										3.1	2.5			82
84										2.5				84
86														86
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	组合 Code
倍率 n	1	1	1	1	1	1	1	1	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table





T 53.1~79.5 m

      															
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
	6.5m														
	40°														
	24 m														
28	8.1	8.1	8.1	8.3	8.3	8.1									28
30	7.9	7.9	7.9	8.1	8.1	8.1	8.2	8.3	8.2						30
32	7.8	7.8	7.7	7.9	7.9	8.0	8.0	8.1	8.0	8.2	8.2				32
34	7.6	7.6	7.7	7.7	7.7	7.8	7.8	7.9	7.8	8.0	8.0				34
36	7.4	7.4	7.5	7.6	7.6	7.6	7.7	7.7	7.7	7.8	7.8	8.2	8.1		36
38	7.4	7.4	7.3	7.5	7.5	7.5	7.5	7.6	7.5	7.7	7.6	8.0	7.9	5.2	38
40	7.2	7.2	7.2	7.4	7.4	7.4	7.5	7.5	7.5	7.6	7.6	7.9	7.7	5.1	40
42	7.1	7.1	7.1	7.2	7.2	7.2	7.3	7.4	7.3	7.5	7.4	7.6	7.5	4.9	42
44	7.0	7.0	6.9	7.1	7.1	7.1	7.3	7.3	7.3	7.4	7.4	7.6	7.3	4.7	44
46	6.9	6.9	6.9	7.0	7.0	7.0	7.1	7.2	7.1	7.3	7.3	7.3	7.1	4.5	46
48	6.8	6.8	6.7	6.9	6.9	6.9	7.1	7.1	7.1	7.3	7.2	7.2	7.0	4.3	48
50	6.7	6.7	6.7	6.9	6.9	6.9	6.9	7.0	6.9	7.2	7.2	7.0	6.8	4.0	50
52	6.7	6.7	6.6	6.8	6.8	6.8	6.9	6.9	6.9	7.1	7.0	6.7	6.6	3.7	52
54	6.5	6.5	6.6	6.7	6.7	6.7	6.9	6.9	6.8	7.0	7.0	6.5	6.4	3.4	54
56	6.5	6.5	6.5	6.7	6.6	6.7	6.7	6.8	6.8	7.0	7.0	6.4	6.3	3.1	56
58	6.5	6.5	6.5	6.6	6.6	6.6	6.7	6.7	6.6	6.9	6.8	6.2	6.1	2.8	58
60	6.4	6.4	6.4	6.5	6.4	6.5	6.7	6.7	6.6	6.8	6.8	6.1	5.9	2.7	60
62	6.4	6.4	6.4	6.5	6.4	6.5	6.6	6.7	6.6	6.8	6.8	6.0	5.8	2.4	62
64	6.4	6.4	6.4	6.4	6.4	6.4	6.6	6.6	6.6	6.8	6.8	5.9	5.7	2.0	64
66	6.4	6.4	5.7	6.4	6.4	6.1	6.6	6.6	6.5	6.7	6.7	5.7	5.6	2.0	66
68				6.3	5.9	5.2	6.4	6.0	5.7	6.7	6.2	5.6	5.3		68
70				5.5	5.1	4.4	5.6	5.2	4.9	6.1	5.4	5.1	4.5		70
72							4.9	4.4	4.1	5.3	4.6	5.0	4.3		72
74							4.2	3.7	3.4	4.6	3.9	4.3	3.6		74
76										4.0	3.3	3.6	3.0		76
78										3.3	2.6	2.8	2.3		78
80												2.1	2.3		80
82															82
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	1	1	1	1	1	1	1	1	1	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table





T 53.1~79.5 m

53.1-79.5 m 6.5 m 18 m 9.4×9.6 m 360° 143 t 																
53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5			
	6.5m															
	40°															
	18 m															
22	11.1	11.1	11.1											22		
24	11.0	11.0	11.0	11.0	11.0	11.0								24		
26	10.9	10.9	10.9	10.9	10.9	10.9	11.0	11.0	11.0					26		
28	10.8	10.8	10.8	10.8	10.8	10.8	11.0	10.9	11.0	11.1	11.0			28		
30	10.8	10.8	10.8	10.7	10.7	10.6	10.9	10.8	10.9	10.9	11.0	11.4	11.2	30		
32	10.6	10.8	10.6	10.7	10.7	10.5	10.8	10.8	10.8	10.8	10.9	11.3	11.1	7.5	32	
34	10.6	10.6	10.4	10.7	10.7	10.3	10.8	10.8	10.8	10.8	10.8	10.9	10.7	7.3	34	
36	10.4	10.4	10.4	10.5	10.5	10.3	10.7	10.7	10.7	10.8	10.8	10.6	10.5	7.0	36	
38	10.2	10.2	10.2	10.3	10.3	10.1	10.5	10.6	10.5	10.8	10.8	10.3	10.2	6.7	38	
40	10.0	10.0	10.0	10.1	10.1	9.9	10.4	10.4	10.4	10.6	10.6	9.9	9.9	6.5	40	
42	9.8	9.8	9.8	10.1	10.1	9.9	10.3	10.3	10.3	10.6	10.6	9.6	9.7	6.3	42	
44	9.8	9.8	9.8	9.9	9.9	9.8	10.1	10.2	10.1	10.6	10.4	9.3	9.2	6.1	44	
46	9.6	9.6	9.6	9.9	9.9	9.8	10.0	10.1	10.0	10.4	10.4	9.0	9.0	5.8	46	
48	9.6	9.6	9.6	9.7	9.7	9.7	9.9	10.0	9.9	10.4	10.2	8.9	8.7	5.6	48	
50	9.4	9.4	9.4	9.7	9.7	9.7	9.8	9.9	9.8	9.9	9.9	8.6	8.5	5.4	50	
52	9.4	9.4	9.4	9.5	9.5	9.6	9.8	9.8	9.8	9.7	9.5	8.5	8.3	5.3	52	
54	9.4	9.4	9.4	9.5	9.5	9.5	9.7	9.7	9.7	8.1	8.1	8.4	8.1	5.1	54	
56	9.4	9.4	9.2	9.5	9.5	9.5	9.6	9.7	9.6	7.8	7.7	8.0	7.7	4.9	56	
58	9.2	9.2	8.1	9.5	9.2	8.5	9.6	9.3	9.0	7.7	7.3	7.9	7.7	4.7	58	
60	8.5	8.2	7.0	8.6	8.2	7.4	8.7	8.2	7.9	7.5	6.9	7.6	7.0	4.5	60	
62				7.7	7.2	6.4	7.8	7.3	7.0	7.2	6.5	7.0	6.3	4.4	62	
64				6.7	6.2	5.5	6.9	6.4	6.1	6.9	6.2	6.3	5.6	4.3	64	
66							6.0	5.5	5.2	6.5	5.8	5.6	4.9	4.2	66	
68							5.2	4.7	4.4	5.7	5.0	4.9	4.2	4.0	68	
70										5.0	4.2	4.1	3.5	3.9	70	
72										4.3	3.5	3.8	3.2	3.4	72	
74												3.2	2.5	2.7	74	
76												3.2	2.3	2.3	76	
78														2.0	78	
80															80	
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code	
倍率 n	1	1	1	1	1	1	1	1	1	1	1	1	1	1	倍率 n	

起重性能表

Rated lifting load table




T 53.1~79.5 m

53.1-79.5 m 6.5 m 12 m 9.4×9.6 m 360° 143 t SL																
53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5			
	6.5m															
	40°															
	12 m															
18	19.2	19.2	19.2	19.2	19.2	19.3								18		
20	18.8	18.8	18.8	18.9	18.8	18.9	18.4	18.7	18.7					20		
22	18.4	18.4	18.4	18.5	18.4	18.5	18.2	18.3	18.3	17.9	18.2			22		
24	18.0	18.0	18.0	18.1	18.1	18.1	17.9	17.9	17.9	17.6	17.8	17.4	17.0	24		
26	17.6	17.6	17.7	17.7	17.7	17.7	17.5	17.5	17.6	17.6	17.4	16.8	16.5	26		
28	17.2	17.2	17.3	17.3	17.3	17.3	17.3	17.2	17.3	17.2	17.2	15.9	16.0	12.3	28	
30	16.9	16.9	16.9	16.9	16.9	16.9	17.1	16.9	17.0	16.8	16.9	15.2	15.5	11.3	30	
32	16.8	16.8	16.9	16.9	16.9	16.9	16.7	16.8	16.8	16.8	16.9	15.0	15.0	10.9	32	
34	16.4	16.4	16.5	16.5	16.5	16.5	16.5	16.6	16.6	16.4	16.5	14.5	14.7	10.5	34	
36	16.1	16.1	16.1	16.1	16.3	16.3	16.3	16.3	16.3	16.2	16.2	14.1	14.2	10.1	36	
38	16.0	16.0	16.1	16.1	16.1	15.9	16.1	16.1	16.1	15.4	15.4	13.5	13.7	9.7	38	
40	15.7	15.7	15.7	15.7	15.7	15.9	15.7	15.6	15.6	14.7	14.8	13.0	13.0	9.1	40	
42	15.7	15.7	15.7	15.4	15.4	15.4	14.9	14.9	14.9	14.2	14.1	12.0	12.3	8.7	42	
44	15.5	15.5	15.2	14.9	15.1	14.6	14.2	14.2	14.2	13.3	13.5	11.4	11.6	8.5	44	
46	15.2	15.2	13.6	13.7	13.0	13.0	13.2	12.5	12.5	12.6	11.9	10.8	11.1	8.2	46	
48	14.2	13.6	12.6	13.2	12.8	12.4	12.7	12.3	12.0	12.0	11.3	10.5	10.5	7.9	48	
50	12.8	12.5	11.1	11.4	10.7	10.3	10.6	9.9	9.9	10.0	9.4	10.3	9.8	7.7	50	
52	11.4	11.1	9.7	10.9	10.4	9.6	9.7	9.7	9.4	9.6	8.9	9.0	8.4	7.4	52	
54	10.2	9.9	8.5	10.3	9.8	9.0	9.6	9.2	8.9	9.1	8.4	8.5	8.4	7.2	54	
56				9.2	8.6	7.8	9.2	8.7	8.3	8.4	7.9	7.7	7.0	7.0	56	
58				8.1	7.5	6.7	8.3	7.7	7.4	8.3	7.5	7.0	6.3	6.8	58	
60							7.3	6.7	6.4	7.7	6.9	6.3	5.6	6.3	60	
62							6.3	5.8	5.4	6.8	6.0	6.0	5.6	5.6	62	
64										6.0	5.2	5.7	4.9	4.9	64	
66										4.8	4.0	4.9	4.2	4.2	66	
68												4.3	3.5	3.9	68	
70												4.0	3.4	3.3	70	
72														2.7	72	
74														2.6	74	
76															76	
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code	
倍率 n	2	2	2	2	2	2	2	2	2	2	2	2	2	1	倍率 n	

起重性能表

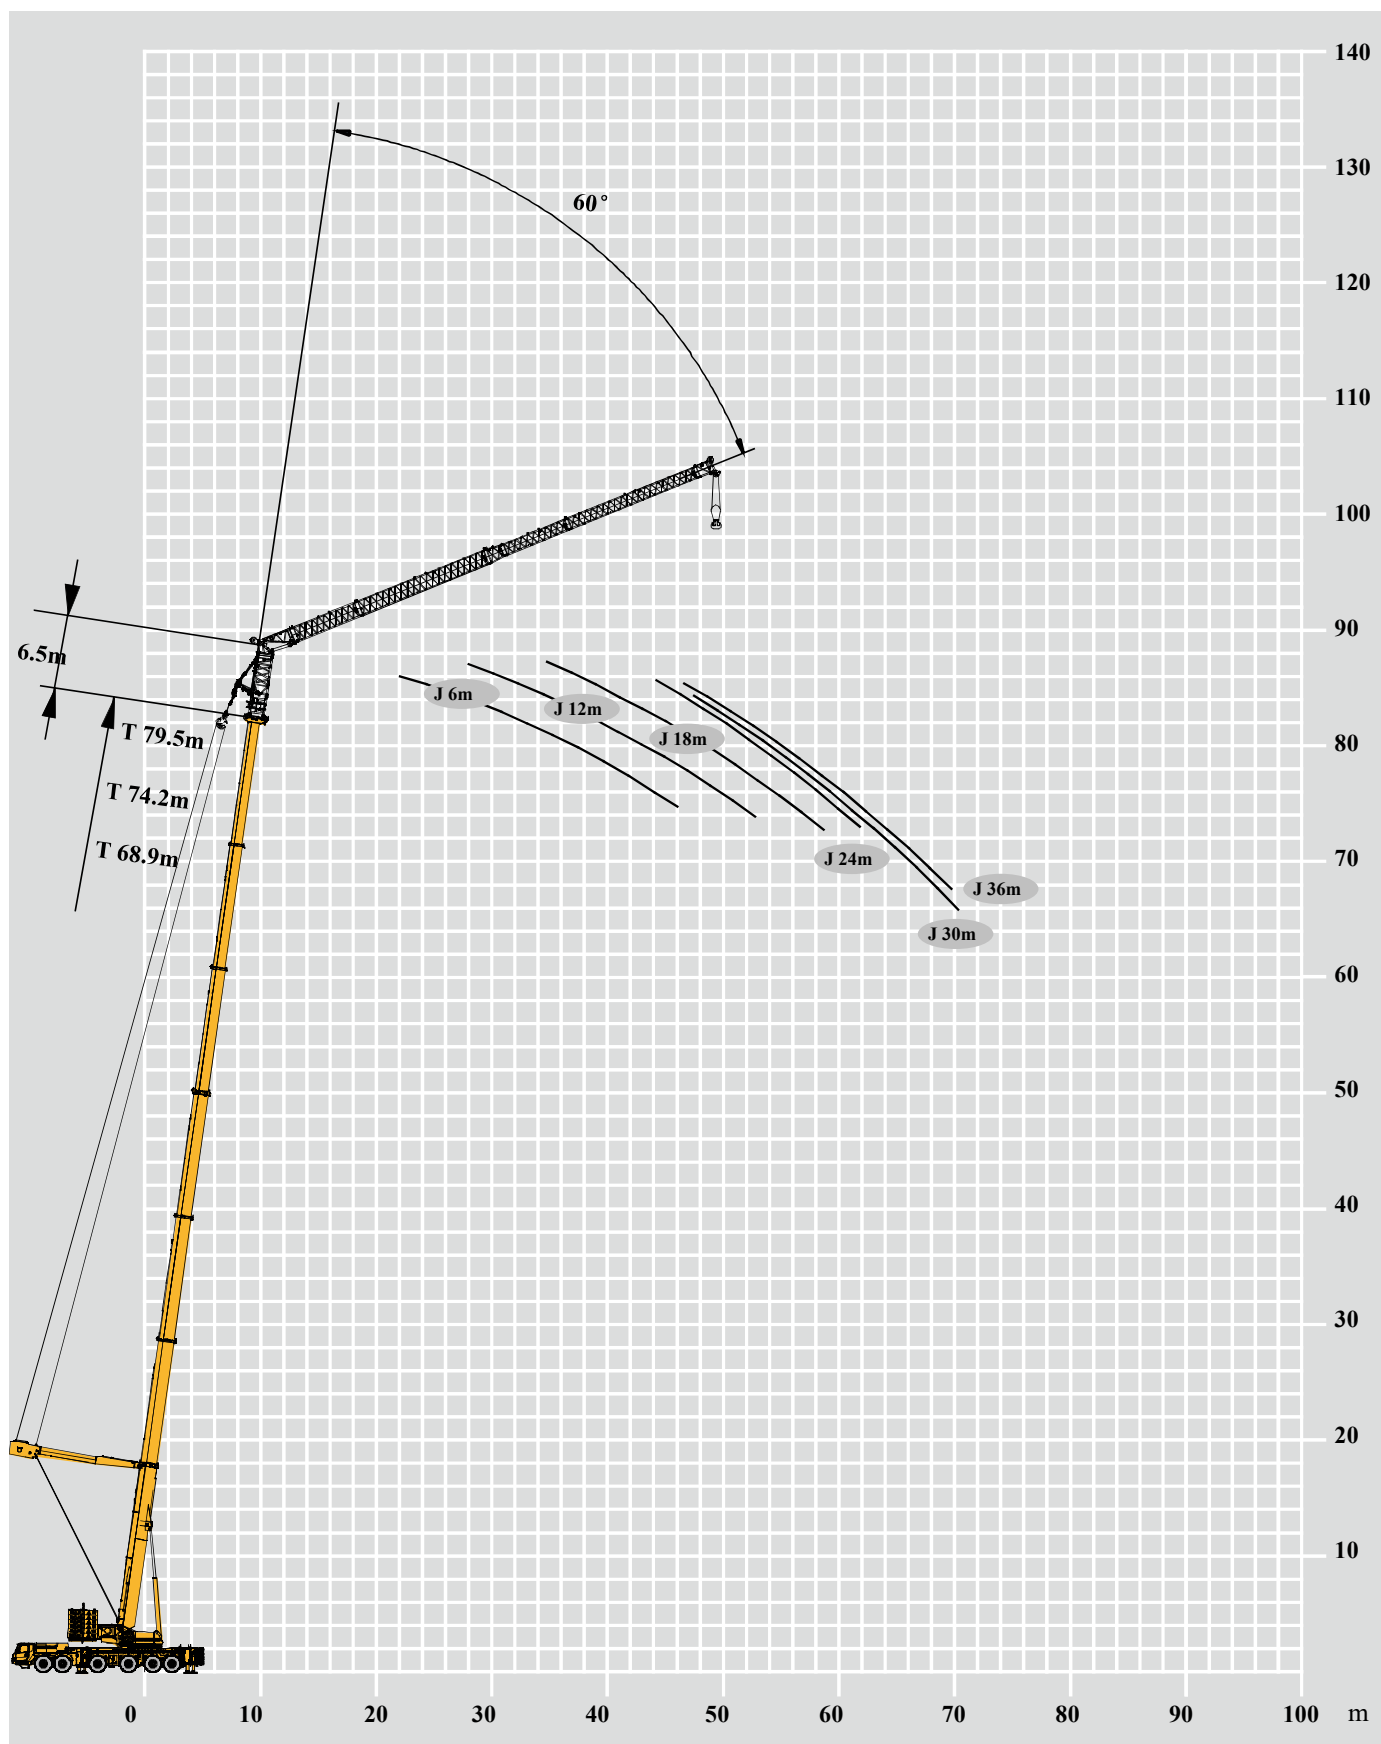
Rated lifting load table

T 16.1~79.5 m

      															
53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5		
6.5m															
40°															
6 m															
12	25.7	25.7	25.7											12	
14	25.3	25.3	25.4	25.0	25.3	25.0								14	
16	24.8	24.7	24.8	24.6	24.6	24.6	24.4	24.4	24.4					16	
18	24.0	24.1	24.1	24.2	24.1	24.2	24.1	24.0	24.1	23.8	23.8	23.3	23.7	18	
20	23.5	23.8	23.5	23.5	23.5	23.5	23.4	23.7	23.4	23.4	23.4	22.9	23.3	20	
22	23.2	23.2	23.3	23.1	23.1	23.1	22.9	23.0	23.2	23.0	23.0	22.6	22.9	19.0	22
24	22.6	22.6	22.6	22.7	22.7	22.7	22.8	22.8	22.7	22.7	22.6	22.2	22.6	17.5	24
26	22.2	22.2	22.2	22.3	22.3	22.3	22.5	22.5	22.4	22.3	22.3	21.5	21.6	16.7	26
28	21.9	21.9	21.9	21.9	21.9	21.9	22.2	22.1	22.2	21.9	22.0	20.2	20.2	16.0	28
30	21.8	21.8	21.9	21.9	21.9	21.6	21.8	21.7	21.8	21.0	21.3	19.0	19.1	15.3	30
32	21.5	21.5	21.5	21.5	21.5	21.5	21.3	21.3	21.3	20.2	20.2	18.0	18.1	14.8	32
34	21.3	21.3	21.3	20.8	20.8	20.8	20.1	20.1	20.1	19.2	19.2	16.9	17.0	14.3	34
36	21.0	21.0	20.6	19.6	19.6	19.1	19.4	19.0	19.0	18.6	18.3	16.0	16.0	13.8	36
38	19.9	19.9	18.3	19.2	18.5	17.7	18.8	18.1	18.1	18.0	17.3	15.9	15.2	13.2	38
40	17.4	17.4	15.9	16.9	16.1	15.4	16.4	15.7	15.7	15.7	15.0	14.6	14.0	12.8	40
42	16.4	16.4	14.9	15.9	15.2	14.4	15.7	14.9	14.9	15.0	14.3	13.2	12.6	12.3	42
44	14.7	14.6	13.1	14.6	13.9	13.1	14.4	13.6	13.6	13.7	13.0	12.5	11.9	11.7	44
46	12.7	12.5	11.0	12.8	12.6	11.7	12.5	12.4	11.7	12.6	11.9	11.1	10.5	11.1	46
48	10.7	10.4	9.0	11.9	11.4	10.5	12.2	11.6	11.3	12.0	11.2	11.1	9.8	9.8	48
50				10.6	10.1	9.2	11.2	10.6	10.2	11.6	10.6	9.0	8.4	9.1	50
52				9.4	8.8	7.9	10.0	9.4	9.0	10.4	9.7	8.5	7.7	8.4	52
54							8.8	8.2	7.8	9.5	8.6	7.8	7.0	7.7	54
56							7.8	7.1	6.7	8.4	7.5	7.1	6.3	7.0	56
58										7.5	6.5	6.4	5.6	6.3	58
60										6.5	5.6	5.7	4.9	5.6	60
62												5.0	4.2	4.9	62
64												4.9	4.0	4.2	64
66														3.5	66
68														3.3	68
70															70
72															72
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	2	2	2	2	2	2	2	2	2	2	2	2	2	2	倍率 n

起升高度曲线图 Lifting height chart





主臂+超起+副臂
Boom+ Super lifting device + Jib



起重性能表

Rated lifting load table




T 53.1~68.9 m

      														
		53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9		
6.5m														
60°														
36 m														
44	3.5	3.5	3.5	3.5	3.5	3.5							44	
46	3.4	3.4	3.4	3.4	3.4	3.4	3.5	3.5	3.5				46	
48	3.4	3.4	3.4	3.4	3.4	3.4	3.5	3.5	3.5	3.6	3.5		48	
50	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.6	3.5		50	
52	3.4	3.4	3.3	3.4	3.4	3.4	3.4	3.4	3.4	3.5	3.5		52	
54	3.3	3.3	3.3	3.4	3.4	3.4	3.4	3.4	3.4	3.5	3.4		54	
56	3.3	3.3	3.3	3.3	3.3	3.3	3.4	3.4	3.4	3.5	3.4		56	
58	3.3	3.3	3.3	3.3	3.3	3.3	3.4	3.4	3.4	3.5	3.4		58	
60	3.3	3.3	3.3	3.3	3.3	3.3	3.4	3.4	3.4	3.5	3.4		60	
62	3.3	3.3	3.3	3.3	3.3	3.3	3.4	3.4	3.4	3.5	3.4		62	
64				3.3	3.3	3.3	3.4	3.4	3.4	3.5	3.4		64	
66				3.3	3.3	3.3	3.4	3.4	3.4	3.5	3.4		66	
68							3.4	3.4	3.4	3.5	3.4		68	
70										3.4	3.4		70	
72													72	
74													74	
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	组合 Code		
倍率 n	1	1	1	1	1	1	1	1	1	1	1	倍率 n		

起重性能表

Rated lifting load table






T 53.1~74.2 m

      														
53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2		
6.5m														
60°														
30 m														
38	4.7	4.7	4.7	4.7	4.7	4.7								38
40	4.7	4.7	4.6	4.7	4.7	4.7	4.8	4.7	4.7					40
42	4.6	4.6	4.6	4.6	4.6	4.6	4.7	4.7	4.7	4.8	4.7			42
44	4.6	4.6	4.6	4.6	4.6	4.6	4.7	4.6	4.6	4.7	4.7	5.0	4.9	44
46	4.6	4.5	4.5	4.6	4.6	4.6	4.6	4.6	4.6	4.7	4.7	4.9	4.8	46
48	4.5	4.5	4.5	4.6	4.6	4.5	4.6	4.6	4.6	4.7	4.6	4.9	4.8	48
50	4.5	4.5	4.5	4.5	4.5	4.5	4.6	4.6	4.6	4.6	4.6	4.9	4.8	50
52	4.5	4.5	4.5	4.5	4.5	4.5	4.6	4.6	4.6	4.6	4.6	3.1	4.2	52
54	4.5	4.5	4.5	4.5	4.5	4.5	4.6	4.6	4.6	4.6	4.6	3.1	4.2	54
56	4.5	4.5	4.5	4.5	4.5	4.5	4.6	4.6	4.6	4.6	4.6	3.1	4.2	56
58				4.5	4.5	4.5	4.6	4.6	4.6	4.6	4.6	3.1	3.8	58
60				4.5	4.5	4.5	4.6	4.6	4.6	4.6	4.6	2.4	3.3	60
62							4.6	4.6	4.6	4.6	4.6	2.4	2.8	62
64										4.6	4.6	2.3	2.8	64
66												2.3	2.3	66
68												2.3	2.3	68
70														70
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	组合 Code
倍率 n	1	1	1	1	1	1	1	1	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table



T 53.1~79.5 m

      															
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
	6.5m														
	60°														
	24 m														
32	7.0	7.0	7.0	7.2	7.2	7.1									32
34	7.0	7.0	7.0	7.0	7.0	7.1	7.3	7.2	7.1						34
36	7.0	7.0	7.0	7.0	7.0	6.9	7.1	7.0	7.0	7.2	7.2				36
38	6.8	6.8	6.8	7.0	7.0	6.9	7.0	7.0	7.0	7.2	7.1	6.8	6.7		38
40	6.8	6.8	6.8	6.9	6.9	6.9	7.0	7.0	7.0	7.1	7.0	5.9	5.8	3.6	40
42	6.8	6.8	6.8	6.9	6.9	6.9	6.9	6.9	6.9	7.1	7.0	5.9	5.8	3.6	42
44	6.8	6.8	6.8	6.9	6.9	6.9	6.9	6.9	6.9	7.1	7.0	5.9	5.8	3.6	44
46	6.8	6.8	6.8	6.9	6.9	6.9	6.9	6.9	6.9	7.0	7.0	5.9	5.8	3.6	46
48	6.8	6.8	6.8	6.9	6.9	6.9	6.9	6.9	6.9	7.0	7.0	5.9	5.8	3.6	48
50	6.8	6.8	6.8	6.9	6.9	6.9	6.9	6.9	6.9	7.0	7.0	5.9	5.8	3.1	50
52				6.9	6.9	6.9	6.9	6.9	6.9	7.0	7.0	5.9	5.8	3.1	52
54				6.9	6.9	6.9	6.9	6.9	6.9	7.0	7.0	5.9	5.8	3.1	54
56							6.9	6.9	6.9	6.9	7.0	5.1	5.0	3.1	56
58										6.9	7.0	5.1	5.0	3.1	58
60												5.1	5.0	2.6	60
62												5.1	5.0		62
64															64
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	1	1	1	1	1	1	1	1	1	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table




T 53.1~79.5 m

      															
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
	6.5m														
	60°														
	18 m														
26	10.3	10.4	10.3												26
28	10.2	10.3	10.2	10.4	10.4	10.4	10.4	10.4	10.4						28
30	10.2	10.2	10.1	10.2	10.2	10.2	10.4	10.4	10.4	10.6	10.6				30
32	10.1	10.1	10.0	10.2	10.2	10.2	10.2	10.2	10.2	10.5	10.5	9.3	9.7		32
34	10.0	10.0	10.0	10.2	10.2	10.0	10.2	10.2	10.2	10.4	10.4	9.2	9.7	6.7	34
36	10.0	10.0	10.0	10.0	10.0	10.0	10.2	10.2	10.2	10.4	10.4	9.1	9.7	6.7	36
38	10.0	10.0	10.0	10.0	10.0	10.0	10.2	10.2	10.2	10.4	10.3	9.1	9.6	6.7	38
40	10.0	10.0	10.0	10.0	10.0	10.0	10.2	10.2	10.2	10.4	10.2	9.1	9.5	6.7	40
42	10.0	10.0	10.0	10.0	10.0	10.0	10.2	10.2	10.2	10.4	10.0	9.1	9.5	6.6	42
44	10.0	10.0	10.0	10.0	10.0	10.0	10.2	10.2	10.2	10.4	10.0	9.0	8.4	5.7	44
46				10.0	10.0	10.0	10.2	10.2	10.2	10.3	10.0	9.0	8.4	5.7	46
48				9.9	10.0	10.0	10.2	10.2	10.2	10.3	10.0	9.0	8.4	5.6	48
50							10.2	10.2	10.2	10.3	10.0	9.0	8.0	5.5	50
52										10.3	9.9	9.0	8.0	5.5	52
54												9.0	7.9	5.4	54
56												8.9	7.9	5.3	56
58														5.2	58
60															60
62															62
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	1	1	1	1	1	1	1	1	1	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table





T 53.1~79.5 m

      															
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
	6.5m														
	60°														
	12 m														
20	15.9	15.9	15.9												20
22	15.8	15.8	15.8	12.4	12.4	12.4	12.5	12.4	12.5						22
24	15.7	15.7	15.7	12.4	12.4	12.4	12.3	12.3	12.3	12.3	12.3				24
26	15.5	15.5	15.5	12.3	12.3	12.3	12.3	12.3	12.3	12.2	12.2	12.1	12.1		26
28	15.3	15.3	15.3	12.3	12.3	12.3	12.2	12.1	12.2	12.1	12.1	12.1	12.1	10.6	28
30	15.3	15.3	15.3	12.1	12.1	12.1	12.1	12.1	12.1	12.0	12.0	12.0	12.1	10.4	30
32	15.3	15.3	15.3	12.1	12.1	12.1	12.0	12.0	12.0	11.9	11.9	11.9	12.0	10.3	32
34	15.3	15.3	15.3	12.1	12.1	12.1	12.0	12.0	12.0	11.9	11.9	11.9	11.9	10.1	34
36	15.3	15.3	15.3	12.1	12.1	12.1	12.0	12.0	12.0	11.9	11.9	11.9	11.9	9.6	36
38	15.3	15.3	15.3	12.1	12.1	12.0	12.0	12.0	12.0	11.9	11.9	11.9	11.9	9.5	38
40				12.0	12.0	12.0	12.0	12.0	12.0	11.9	11.9	11.9	11.9	8.9	40
42				12.0	12.0	12.0	12.0	12.0	12.0	11.8	11.8	11.9	11.9	8.5	42
44							12.0	12.0	12.0	11.8	11.8	11.9	11.9	8.2	44
46										11.8	11.8	11.9	11.9	7.9	46
48												11.5	10.9	7.6	48
50												10.9	10.2	7.4	50
52														7.1	52
54															54
56															56
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	2	2	2	1	1	1	1	1	1	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table

T 53.1~79.5 m

      															
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
	6.5m														
	60°														
	6 m														
14	17.3	16.9	17.3												14
16	17.0	16.9	17.0	16.9	16.9	16.9	16.9	16.8	16.9						16
18	16.8	16.8	16.8	16.8	16.8	16.8	16.6	16.6	16.6	16.3	16.3				18
20	16.7	16.6	16.7	16.6	16.6	16.6	16.6	16.6	16.6	16.3	16.3	16.2	16.2		20
22	16.5	16.6	16.5	16.5	16.5	16.5	16.3	16.3	16.3	16.3	16.3	16.0	16.0	16.0	22
24	16.5	16.6	16.5	16.2	16.2	16.2	16.2	16.2	16.2	16.1	16.1	16.0	16.0	16.0	24
26	16.5	16.5	16.5	16.2	16.2	16.2	16.2	16.2	16.2	16.0	16.0	16.0	16.0	15.9	26
28	16.5	16.3	16.5	16.2	16.2	16.2	16.2	16.2	16.2	16.0	16.0	16.0	16.0	15.7	28
30	16.5	16.3	16.5	16.2	16.2	16.2	16.0	16.2	16.0	16.0	16.0	15.7	16.0	15.7	30
32	16.5	16.3	16.5	16.2	16.2	16.2	15.9	16.0	15.9	16.0	16.0	15.6	15.7	15.7	32
34				16.2	16.2	16.2	15.9	15.9	15.9	16.0	16.0	15.6	15.6	15.7	34
36				16.2	16.2	16.2	15.9	15.9	15.9	16.0	16.0	15.6	15.6	15.7	36
38							15.2	15.4	15.4	16.0	15.4	15.6	15.6	15.7	38
40										14.7	14.1	14.7	14.1	14.7	40
42												13.4	12.8	13.4	42
44												12.8	12.2	12.2	44
46														11.5	46
48															48
50															50
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	2	2	2	2	2	2	2	2	2	2	2	2	2	2	倍率 n

主要技术参数表

Table of main technical data

类别 Category	项目 Item		单位 Unit	参数 Parameter
尺寸参数 Dimensions	外形尺寸（长×宽×高） Dimensions（length×width×height）		mm	16940×3000×4000
	轴距 Wheel base		mm	1650+3050+2665+2100+1650
	轮距（前/后） Track（Front/ Rear）		mm	2530/2530/2530/2530/2530/2530
	前悬/后悬 Front/ Rear overhang		mm	2689/1086
	前伸/后伸 Front/ Rear extension		mm	1460/590
重量参数 Weight	最大允许总质量 Max. permissible weight		kg	55000/70000
	轴荷 Axle load	一轴 1st axle	kg	9100 / 11830
		二轴 2nd axle	kg	9100 / 11830
		三轴 3rd axle	kg	9100 / 11830
		四轴 4th axle	kg	9200 / 11300
		五轴 5th axle	kg	9200 / 11300
		六轴 6th axle	kg	9200 / 11300
动力参数 Power	发动机型号 Engine model		——	OM502LA.E3B/1
	额定功率/转速 Rated power/rpm		kW/(r/min)	482.2/1800
	最大输出扭矩/转速 Max. output torque/rpm		N.m/(r/min)	3000/1300
行驶参数 Travel	最高车速 Max. travel speed		km/h	≥80
	最低稳定车速 Min. stable travel speed		km/h	2
	最小转弯直径 Min. turning diameter		m	≤23.3
	臂头最小转弯直径 Min. turning diameter at boom tip		m	≤27.6
	最小离地间隙 Min. ground clearance		mm	330
	接近角 Approach angle		°	17
	离去角 Departure angle		°	30.4
	制动距离（制动初速度为30km/h） Braking distance（at 30 km/h）		m	≤10
	最大爬坡能力 Max. grade ability		%	≥52
	百公里油耗 Fuel consumption per 100 km		L	105
噪音 Noise	加速行驶机外噪声 Exterior noise level during acceleration		dB(A)	≤84
	驾驶员耳旁噪声 Noise level at seated position		dB(A)	≤90

主要技术参数表

Table of main technical data









类别 Category	项目 Item			单位 Unit	参数 Parameter
主要性能参数 Main performance	最大额定总起重量 Max. rated lifting capacity			t	500
	最小额定工作幅度 Min. rated working radius			m	2.5
	转台尾部回转半径 Turning radius at turntable tail			mm	6900
	最大起重力矩 Max. load moment	基本臂 Base boom		kN.m	13800
		最长主臂 Fully-extended boom		kN.m	9120
	支腿跨距 Outrigger span	纵向 Longitudinal		m	9.4
		横向 Lateral		m	9.6
	起升高度 Lifting height	基本臂 Base boom		m	17
		最长主臂 Fully-extended boom		m	84
		最长主臂+副臂 Fully-extended boom + Jib		m	125
	起重臂长度 Boom length	基本臂 Base boom		m	16.1
		最长主臂 Fully-extended boom		m	85
		最长主臂+副臂 Fully-extended boom + Jib		m	128
副臂安装角 Jib offset angle			°	0、20、40、60	
工作速度参数 Working speed	起重臂起臂时间 Time for boom raising			s	≤90
	起重臂全伸时间 Time for boom extending fully			s	≤1300
	最大回转速度 Max. slewing speed			r/min	≥1.2
	支腿收放时间Time for outrigger extending and retracting	水平支腿（单侧） Outrigger beam (single side)	收 Retracting	s	≤30
			放 Extending	s	≤40
		垂直支腿 Outrigger jack	收 Retracting	s	≤85
			放 Extending	s	≤85
	起升速度（单绳,第四层,空载） Hoisting speed (single line, 4th layer, no load)	主起升机构 Main winch		m/min	≥20
变幅副臂变幅卷扬 Luffing winch of luffing jib		m/min	≥40		
噪声 Noise	机外辐射 Exterior noise level			dB (A)	≤111
	司机位置处 Noise level at seated position			dB (A)	≤85

符号标识

Description of symbols

常规标识

General symbols

	吊臂长度 Boom length		车桥 Axle
	工作幅度 Radius		行驶速度 Travel speed
	吊臂仰角 Boom angle		爬坡能力 Grade ability
	固定副臂长度 Fixed jib length		轮胎 Tire
	副臂安装角 Jib offset angle		平衡重 Counterweight
	超起 Super lifting device		上车 Superstructure
	风电臂 Wind power jib		底盘 Chassis
	支腿 Outtrigger		360°全回转 360° operation of the boom
	吊钩 Hook block		卷扬 Winch

注意事项

Notes

1. 表中额定总起重量值，是在平整的坚固地面上本起重机能够保证的最大总起重量，包括吊钩和吊具的重量，所以为了估算重物重量，必须减去上述的装置重量。
2. 表中的工作幅度为起吊重物离地时起重物到起重机回转轴线的水平距离，是包括起重臂变形量在内的实际值，因而起吊前应考虑起重臂变形量。
3. 只允许在5级(瞬时风速14.1m/s，风压125N/m²)风以下进行作业。
4. 吊重前操作者必须对物体的重量和工作范围了解后选择合适的作业工况，严禁超出表中的数值。幅度及臂长在相邻两个数值之间时，应依据两个数值中较小值确定起重作业。
5. 应按主臂仰角范围作业，即使是空载，也不应使主臂仰角处于范围外，谨防整机倾翻。
6. 表中的主臂长度应要按照每节臂的伸缩要求进行伸出。

1. The total rated load given in the rated lifting load table are the maximum lifting capacity when the crane is set up on firm and level ground. The total rated load includes the weight of the hook block and slings. The weight of above-mentioned devices should be deducted from the rated lifting load.
2. The working radius shown in the rated lifting load table is the horizontal distance between the gravity center of the load and the rotational axis of the crane when the load is lifted off ground, and it is the actual value including loaded boom deflection. Take boom deflection into consideration before beginning a lifting operation.
3. A lifting operation is permissible only when the wind force is below grade 5 (instantaneous wind speed is 14.1 m/s, wind pressure is 125 N/m²).
4. Before beginning lifting operation, the operator should know the weight of the load to be lifted and its working range, and then select proper working conditions. Never operate the crane beyond the limit shown in the chart. Use the lower value from the chart when the boom length or working radius is between the range of values.
5. Observe the boom angle limit. Never operate the crane with the boom angle beyond the recommended limit even if no load is being carried. Otherwise, the crane will tip.
6. The boom should be extended according to the telescoping code shown by digits.



地址：江苏省徐州市经济技术开发区高新路68号

Add: No. 68 Gaoxin Road, Economic and Technological Development Zone, Xuzhou, Jiangsu, China

电话(Tel): +86-516-83462242/83462350

质量监督电话(Quality Inquiry Tel): +86-516-87888268

备件电话(Spare Parts Tel): +86-516-83461542

邮编(Post Code): 221004

网址(Web): www.xcmg.com/qizhongji

2021年9月 第一版
9st edition, March 2021

服务热线 Service Tel

400-110-9999

400-001-5678



本印刷品不属于合同。出于产品不断改进的需要，我们保留对产品型号、参数、配置进行变更的权利，恕不另行通知。图片仅供参考，具体产品以实物为准。图片中产品可能并非标准配置，部分部件可能需要另行购置。办理牌照和上路行驶需遵守当地法规。

This print is not part of the contract. We reserve the right to modify the design (such as product model, parameters and configuration) without notice for improvement. The pictures are just for reference. The product in the picture may not be standard configuration. Some parts need to be purchased separately. Conform to the local laws for license application and road traveling.