

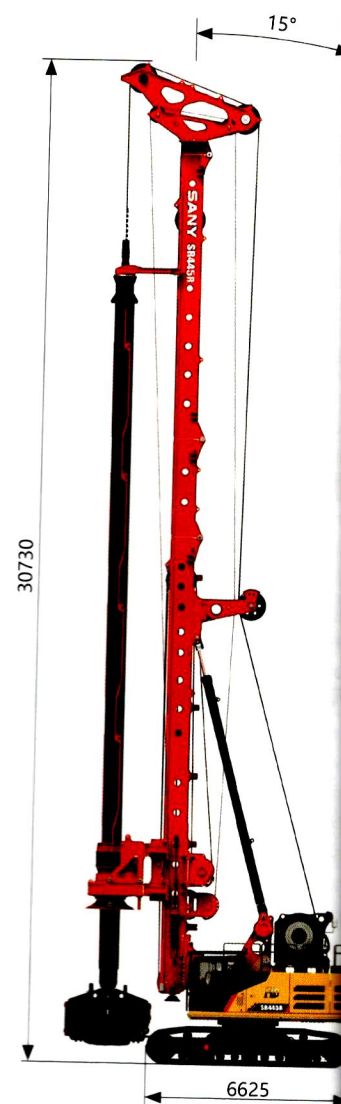


H10
新品上市
New Arrival

Main performances	Unit	Parameter	Remark
Pile			
Max. pile diameter	mm	3000	
Max. pile depth	m	116/95	friction/inter- locking kelly
Rotary Drive			
Max. output torque	kN-m	445	
Speed of rotation	rpm	4~22	
Crowd system			
Crowd force	kN	400	
Line pull	kN	400	
Stroke	mm	10000/21000	
Main winch			
Line pull	kN	560	
Rope diameter	mm	40	
Max. line speed	m/min	60	
Auxiliary winch			
Line pull	kN	90	
Rope diameter	mm	20	
Max. line speed	m/min	70	
Mast inclination			
Forward/backward	°	90/15	
Lateral	°	±3	
Main Chassis			
Base engine		ISUZU 6WG1	
Engine power	kW/rpm	377/1800	
Emission regulation		COMIII	
Engine displacement	L	15.68	
Chassis length	mm	8040	
Extended width	mm	4900	
Track shoe width	mm	800	
Swing radius	mm	4800	
Overall machine			
Overall height	mm	30730	
Operating weight	t	162	
Transport width	mm	3600	
Transport height	mm	3810	

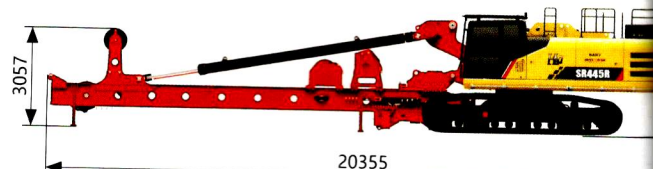

■ Lowering the mast dimensions

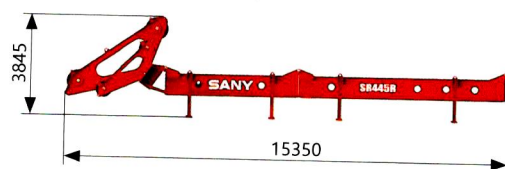

■ Type of kelly bar

Friction kelly	Depth(m)
Φ580×6×19	104
Φ580×6×20	110
Φ580×6×21	116

Inter-locking kelly	Depth(m)
Φ580×4×19	68
Φ580×4×20	72
Φ580×4×21	76
Φ580×5×21	95