

Linear Actuators

Model No : KS017



930 cm
wire length




Input volt : 24 volt
Current Rating : 2.3 A



4 PIN
DIN CONNECTOR

Stroke Length
30mm, 40mm,
50mm, 100mm,
150mm

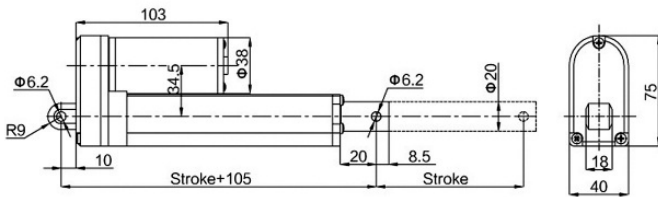

Other Specification :

Free load speed	40mm/s, 10mm/s
Load Capacity	(40mm/s=200N (20.4Kg)) (10mm/s = 750N(76.4kg)), (600N (61.1kg))
Protection Class	IP65
Mode of Operation	PUSH / PULL
Operating Temperature	-15 °C to 45°C
Duty Cycle	10%,2min.on/18min.off
Safe Operating load	(200N= 0-5kg), (750N= 15-18 kg), (600N= 10-15 kg)

Applications:

- MATERIAL HANDLING,
- FACTORY AUTOMATION,
- PACKAGING & CONVERTING

Features :

- COMPACT DESIGN,
- ALUMINIUM FRAME & EXTENSION TUBE,
- BUILT-IN LIMIT SWITCH,
- LOW NOISE,
- ELECTRICAL OPERATION ONLY