

Linear Actuators

Model No : KS021B




1.68m
wire length



Input volt : 24 volt
Current Rating : 2.3 A



4 PIN DIN
CONNECTOR

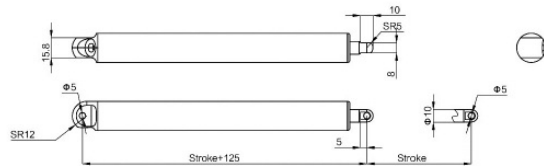

Other Specification :

| | |
|-----------------------|-----------------------|
| Free load speed | 7mm/s |
| Load Capacity | 120N (12kg) |
| Protection Class | IP66 |
| Mode of Operation | PUSH / PULL |
| Operating Temperature | -15 °C to 45°C |
| Duty Cycle | 10%,2min.on/18min.off |
| Safe Operating load | 0-3Kg |
| Stroke Length | 50mm, 100mm, 150mm |

Applications:

- MATERIAL HANDLING,
- FACTORY AUTOMATION,
- PACKAGING & CONVERTING

Features :

- COMPACT DESIGN,
- ALUMINIUM FRAME & EXTENSION TUBE,
- BUILT-IN LIMIT SWITCH,
- LOW NOISE,
- ELECTRICAL OPERATION ONLY