


## PILOT VALVE

TYPE	PRESSURE

TYPE	PRESSURE

TYPE	PRESSURE
20159	0 - 8.5 bar




## FEATURES

- Line mounted valve
- Ease of maintenance
- High Flow, quick response
- Solenoid capable of turning 360°



## WETTED PARTS

Code	※	B5
Body and Internals	Aluminium Die Cast	SS 316 Cast
Guide Assembly	SS 304	
Shadow-Ring	Copper	
Plunger, Insert	SS 430	
Diaphragm	Hytrel, Viton	
Fasteners	SS 304	
Seat, Seals	NBR, Viton	

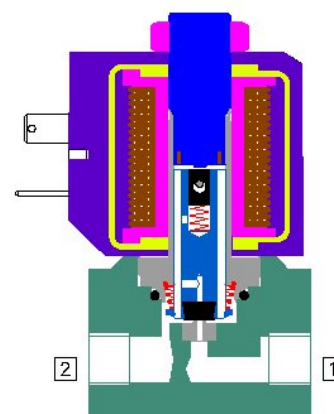

## SPECIFICATION

RESPONSE TIME 8 ms

## AMBIENT TEMPERATURE

-30 °C to 75 °C

## FLUID TEMPERATURE

-30 °C to 75 °C

## PORT CONNECTION

FUNCTION	INLET	OUTLET
NC	2	1

Contact Rotex for  
• Any other ambient, fluid temperature, media and application



## SPARES

(Refer page 25 for ordering code)

SPARE KIT	CODE
Seal Kit : Oring Set and Plunger Assembly	98
Repair Kit : Oring Set, Plunger Assembly, Fastener, Springs, Guide Assembly	99
Solenoid Kit : Solenoid, Gasket	34

## APPROVAL

(※ applied for)

Approval	TYPE 4X, 6P	IP67	Ex d IIC T4 or T5 or T6 IP66	Ex ia IIC T6 IP67	DGMS	CCOE
		✓	✓	✓	✓	✓
CE		✓	✓	✓		
UL	✓		*			
			✓	✓		
EAC			✓	✓		
			✓	✓		

